

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P844402

Luminaire Tested: **LD6C35DE010B2750 EU6C35B35 6LBWLI**

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-08
Report Number: P844402
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205209)
Test Lab: INNOVATION CENTER
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD6C35DE010B2750 EU6C35B35 6LBWLI
Description:
Light Source: -
Ballast/Driver:

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4441.0 lumens
Efficiency: N/A
Efficacy: 106.5 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.18
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 41.7
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P844402

CATALOG NUMBER: LD6C35DE010B2750 EU6C35B35 6LBWLI

Luminous Intensity Polar Plot

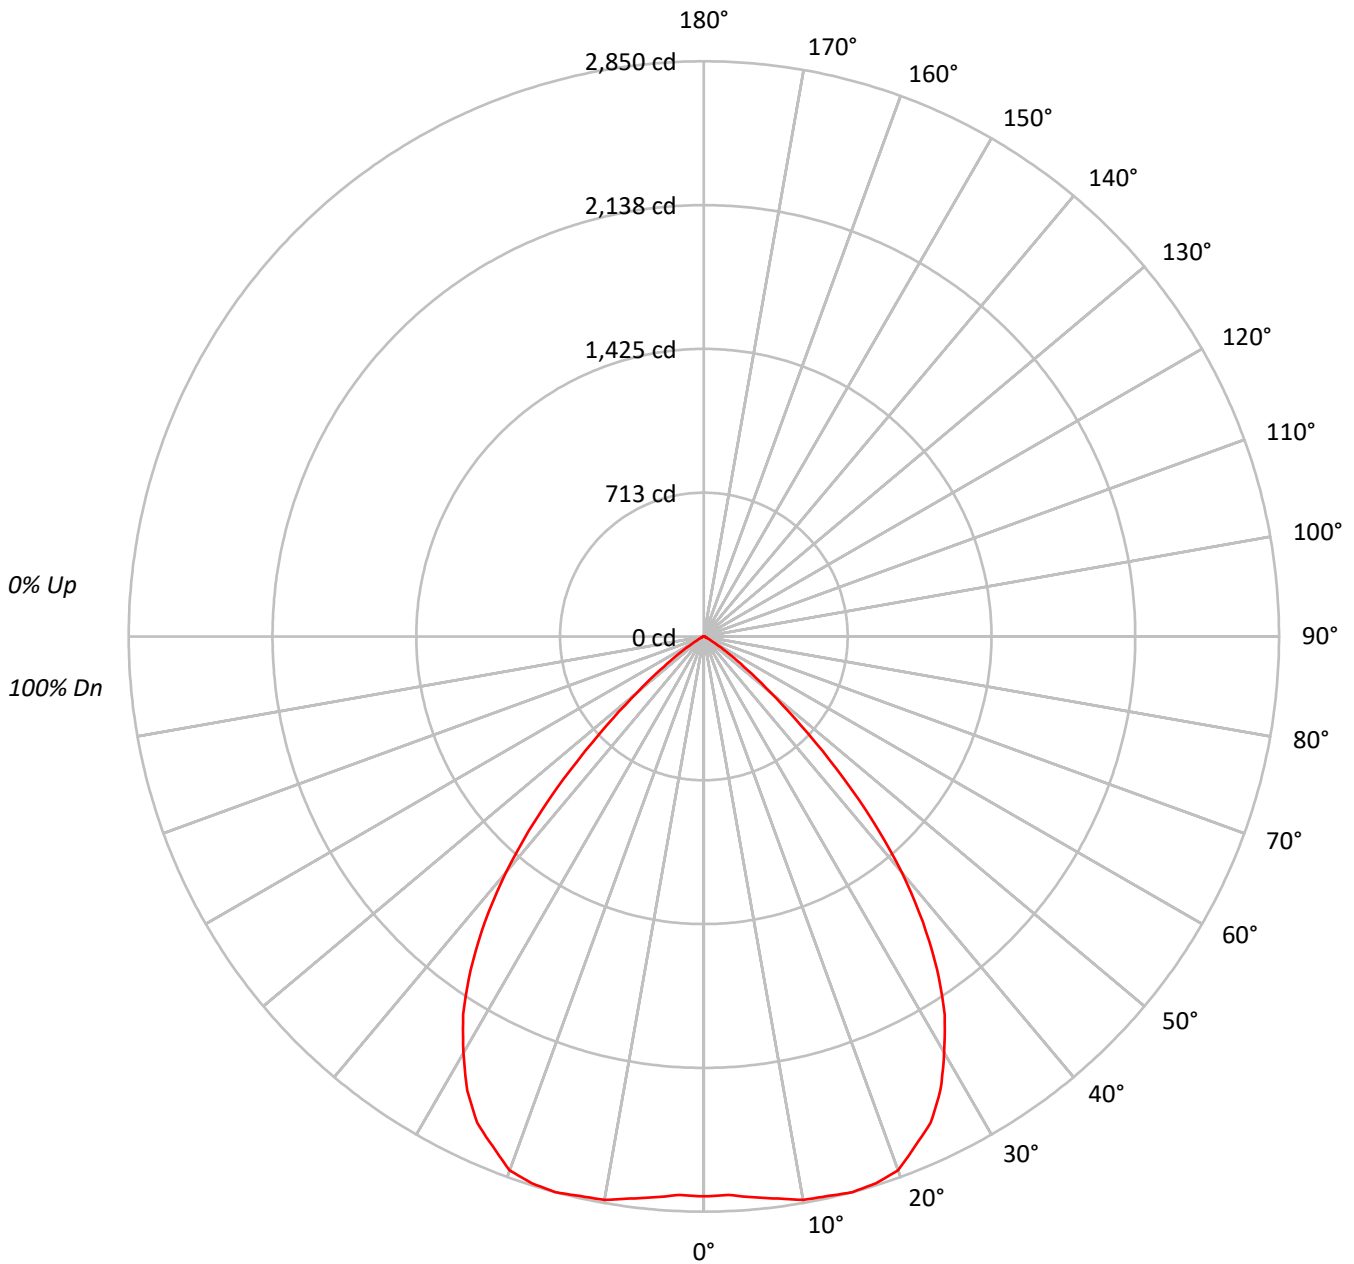



TEST NUMBER: P844402

CATALOG NUMBER: LD6C35DE010B2750 EU6C35B35 6LBWLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	113	110	107	104	110	107	105	103	103	101	99	100	98	97	96	95	94	92				92
2	106	101	96	92	104	99	95	91	95	92	89	92	90	87	90	87	85	83				83
3	100	92	87	82	97	91	86	81	88	84	80	86	82	79	83	80	77	76				76
4	93	85	78	73	92	84	78	73	81	76	72	79	75	71	77	74	70	69				69
5	88	78	71	66	86	77	71	66	75	70	65	73	69	65	72	68	64	63				63
6	82	72	65	60	81	71	65	60	70	64	59	68	63	59	67	62	59	57				57
7	77	67	60	55	76	66	59	55	65	59	54	63	58	54	62	57	54	52				52
8	73	62	55	50	71	61	55	50	60	54	50	59	54	50	58	53	49	48				48
9	69	57	51	46	67	57	50	46	56	50	46	55	50	46	54	49	46	44				44
10	65	54	47	43	64	53	47	42	52	46	42	51	46	42	51	46	42	41				41

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	152093
5°	153499
10°	157796
15°	161743
20°	164199
25°	160812
30°	150764
35°	134796
40°	109176
45°	72225
50°	36502
55°	15407
60°	4967
65°	1946
70°	1635
75°	1080
80°	0
85°	0



TEST NUMBER: P844402

CATALOG NUMBER: LD6C35DE010B2750 EU6C35B35 6LBWLI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	267.6	6.0
10°-20°	804.4	18.1
20°-30°	1212.7	27.3
30°-40°	1241.2	27.9
40°-50°	723.1	16.3
50°-60°	166.2	3.7
60°-70°	20.4	0.5
70°-80°	5.4	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2284.8	51.4
0°-40°	3526.0	79.4
0°-60°	4415.3	99.4
0°-90°	4441.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4441.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2774	
5°	2789	268
15°	2850	804
25°	2659	1213
35°	2014	1241
45°	932	723
55°	161	166
65°	15	20
75°	5	5
85°	0	0
90°	0	



TEST NUMBER: P844402

CATALOG NUMBER: LD6C35DE010B2750 EU6C35B35 6LBWLI

CANDELA DISTRIBUTION (FULL):

	0°
0°	2774.4
2.5°	2769.3
5°	2789.4
7.5°	2809.5
10°	2834.7
12.5°	2839.7
15°	2849.9
17.5°	2839.7
20°	2814.6
22.5°	2734.0
25°	2658.6
27.5°	2537.8
30°	2381.7
32.5°	2220.5
35°	2014.2
37.5°	1782.3
40°	1525.6
42.5°	1238.6
45°	931.6
47.5°	649.5
50°	428.0
52.5°	271.9
55°	161.2
57.5°	85.7
60°	45.3
62.5°	25.2
65°	15.0
67.5°	15.0
70°	10.2
72.5°	5.1
75°	5.1
77.5°	5.1
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)