

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P843916

Luminaire Tested: **LD6C08DE010B2750 EU6C08B50 6LBMB**

Issue Date: 5/7/2024



Test Information

Test Method: LM-79-08
Report Number: P843916
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P203577)
Test Lab: INNOVATION CENTER
Issue Date: 5/7/2024
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD6C08DE010B2750 EU6C08B50 6LBMB
Description:
Light Source: -
Ballast/Driver:

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 388.2 lumens
Efficiency: N/A
Efficacy: 40.4 lumens/watt
Spacing Criteria (0/90/45): 1 / 1 / 0.97
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 9.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P843916

CATALOG NUMBER: LD6C08DE010B2750 EU6C08B50 6LBMB

Luminous Intensity Polar Plot

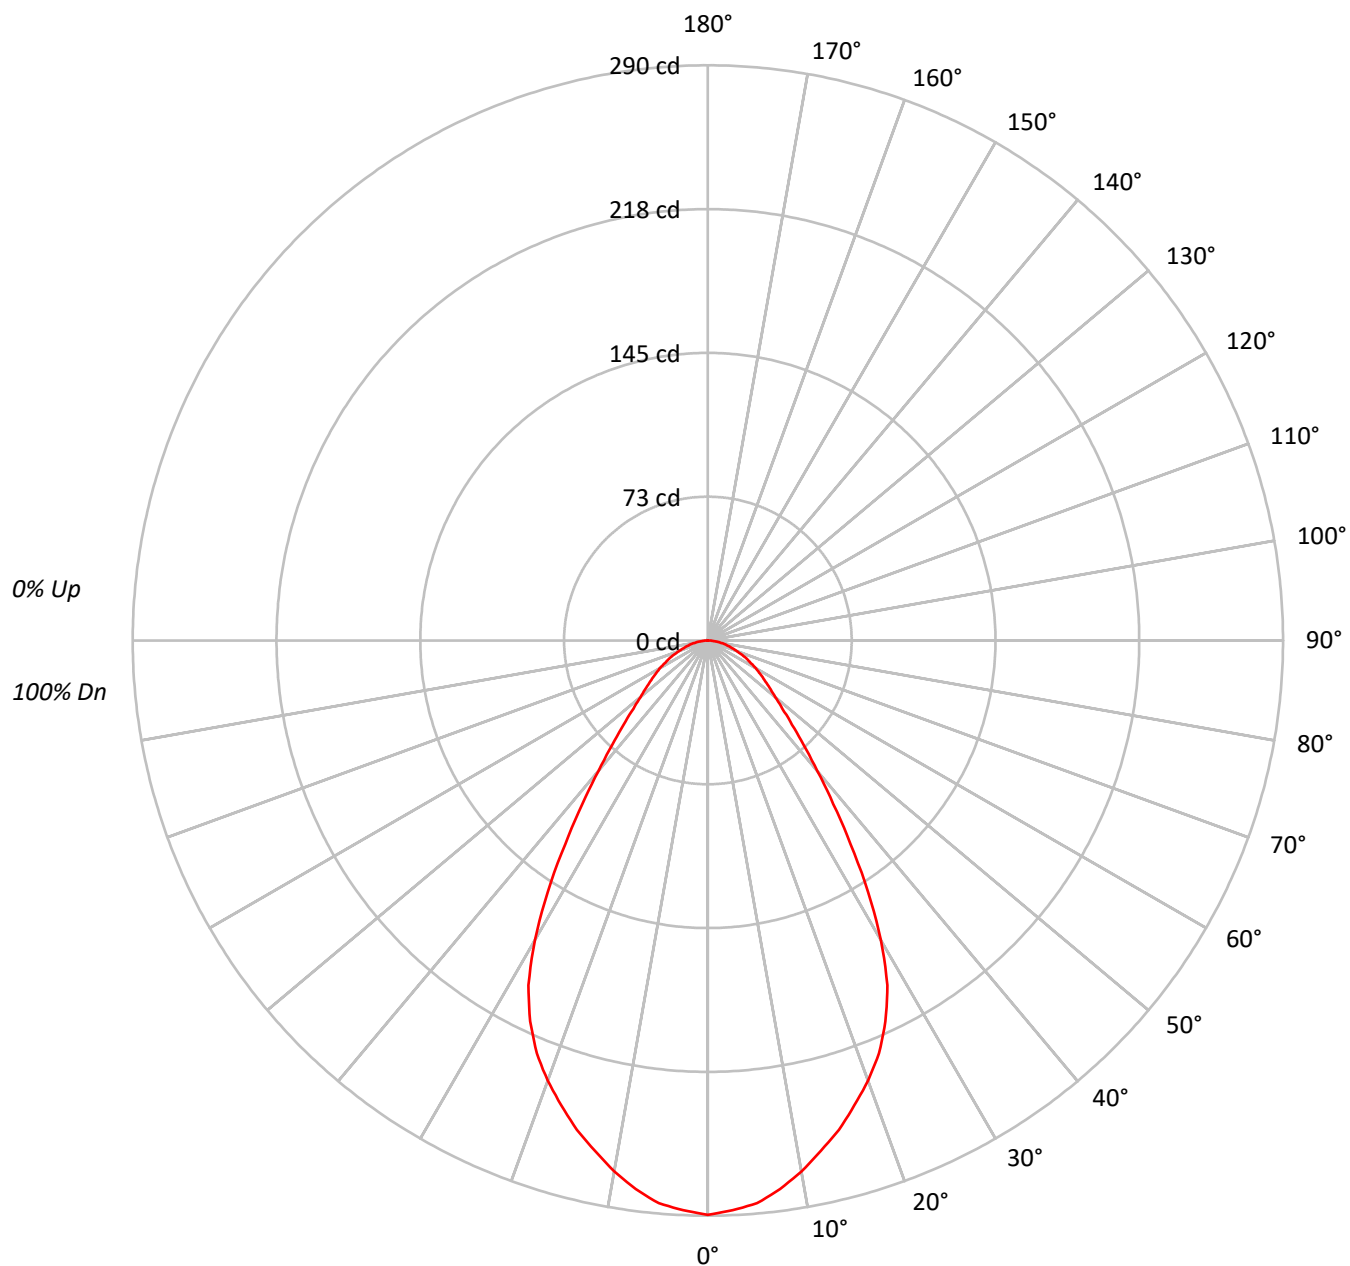



TEST NUMBER: P843916

CATALOG NUMBER: LD6C08DE010B2750 EU6C08B50 6LBMB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	111	108	104	101	109	105	103	100	101	99	97		98	96	94		94
2	104	97	92	88	101	96	91	87	92	88	85		89	86	83		86
3	97	88	82	77	95	87	81	76	84	79	75		82	77	74		79
4	90	81	74	68	88	80	73	68	77	72	67		75	70	66		73
5	85	74	67	61	83	73	66	61	71	65	61		69	64	60		68
6	79	68	61	56	78	68	61	56	66	60	55		64	59	55		63
7	75	63	56	51	73	63	56	51	61	55	50		60	54	50		59
8	70	59	52	47	69	58	51	47	57	51	46		56	50	46		55
9	66	55	48	43	65	54	48	43	53	47	43		52	47	43		51
10	63	51	45	40	62	51	44	40	50	44	40		49	44	40		48

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	15876
5°	15672
10°	15136
15°	14495
20°	13774
25°	12817
30°	11046
35°	8385
40°	6133
45°	4652
50°	3787
55°	3326
60°	3048
65°	2789
70°	2484
75°	2266
80°	2052
85°	1635



TEST NUMBER: P843916

CATALOG NUMBER: LD6C08DE010B2750 EU6C08B50 6LBMB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	26.8	6.9
10°-20°	71.7	18.5
20°-30°	96.2	24.8
30°-40°	78.9	20.3
40°-50°	47.4	12.2
50°-60°	31.5	8.1
60°-70°	21.1	5.4
70°-80°	11.4	2.9
80°-90°	3.2	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	194.6	50.1
0°-40°	273.6	70.5
0°-60°	352.5	90.8
0°-90°	388.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	388.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	290	
5°	285	27
15°	255	72
25°	212	96
35°	125	79
45°	60	47
55°	35	32
65°	22	21
75°	11	11
85°	3	3
90°	0	



TEST NUMBER: P843916

CATALOG NUMBER: LD6C08DE010B2750 EU6C08B50 6LBMB

CANDELA DISTRIBUTION (FULL):

	0°
0°	289.6
2.5°	287.5
5°	284.8
7.5°	278.9
10°	271.9
12.5°	263.4
15°	255.4
17.5°	245.7
20°	236.1
22.5°	225.4
25°	211.9
27.5°	196.0
30°	174.5
32.5°	150.4
35°	125.3
37.5°	103.9
40°	85.7
42.5°	71.2
45°	60.0
47.5°	50.9
50°	44.4
52.5°	39.1
55°	34.8
57.5°	31.1
60°	27.8
62.5°	24.1
65°	21.5
67.5°	18.2
70°	15.5
72.5°	12.8
75°	10.7
77.5°	8.6
80°	6.5
82.5°	4.9
85°	2.6
87.5°	1.1
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)