

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P844309

Luminaire Tested: **LD6C30DE010B35 EU6C30B35 6LBMH**

Issue Date: 2/17/2023



Test Information

Test Method: LM-79-08
Report Number: P844309
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P203254)
Test Lab: INNOVATION CENTER
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD6C30DE010B35 EU6C30B35 6LBMH
Description:
Light Source: -
Ballast/Driver:

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2094.2 lumens
Efficiency: N/A
Efficacy: 61.4 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.93
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 34.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P844309

CATALOG NUMBER: LD6C30DE010B35 EU6C30B35 6LBMH

Luminous Intensity Polar Plot

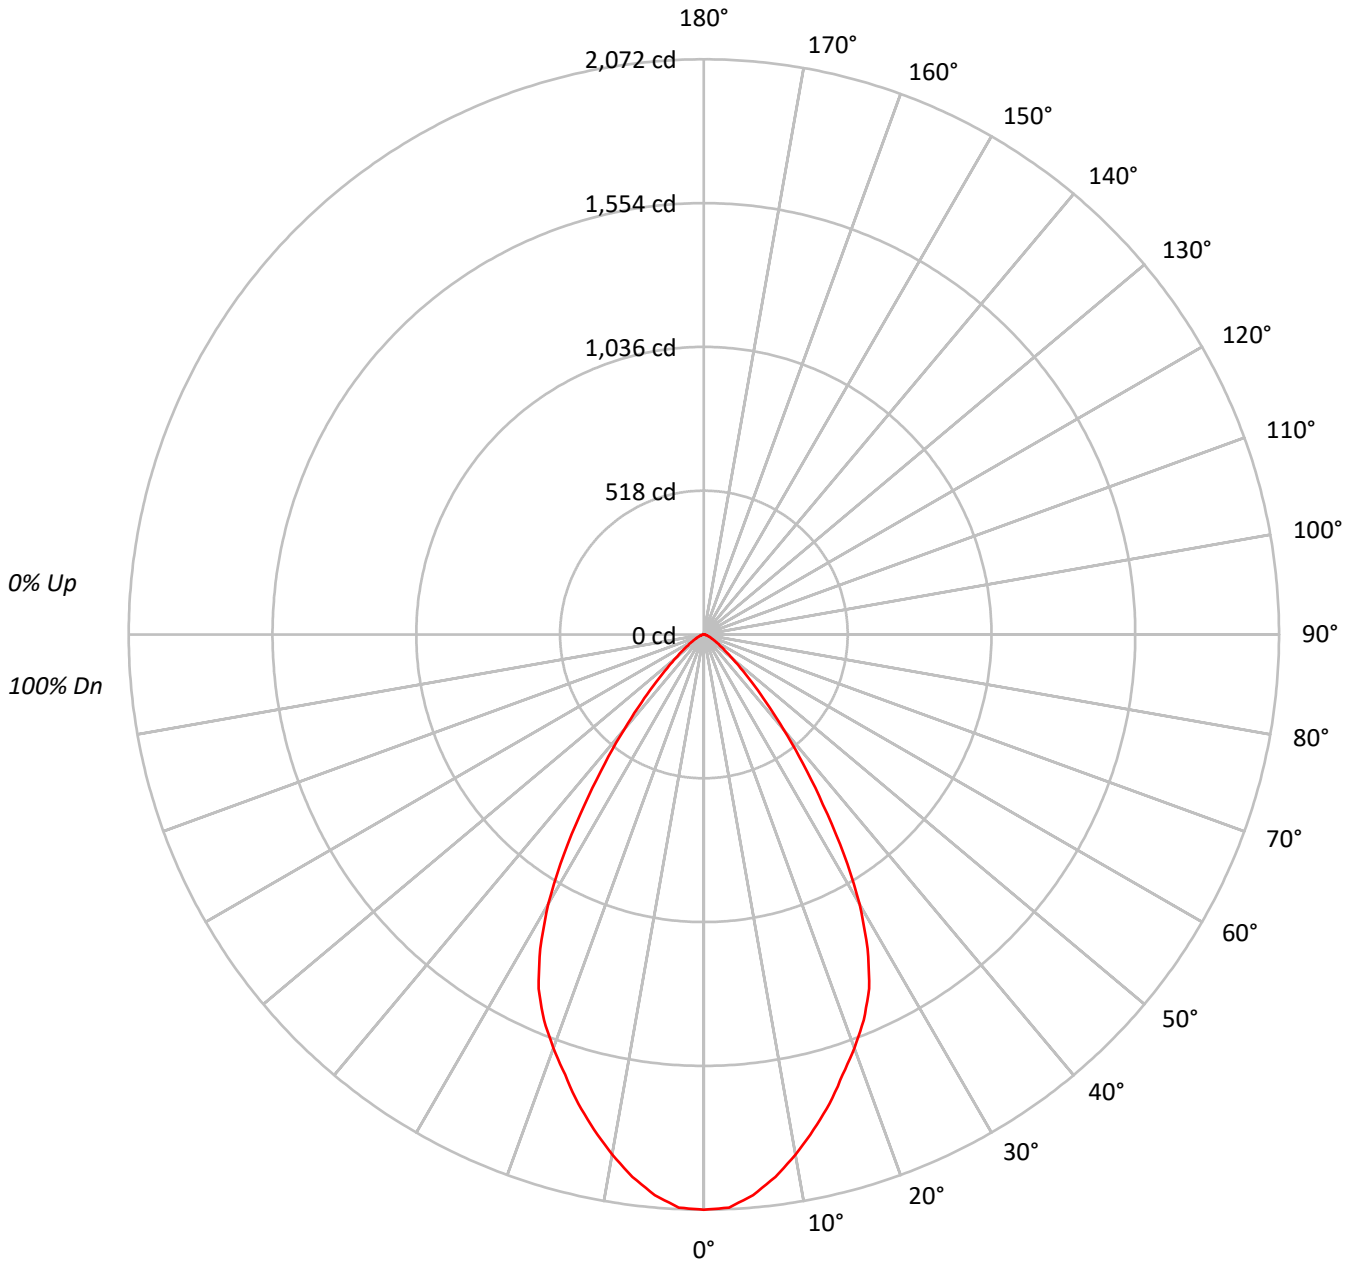



TEST NUMBER: P844309

CATALOG NUMBER: LD6C30DE010B35 EU6C30B35 6LBMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	92																			
2	107	102	97	93	105	100	96	92	97	93	90	94	91	88	91	89	87	85																			
3	101	94	88	84	99	92	87	84	90	86	82	87	84	81	85	82	80	78																			
4	95	87	81	76	93	86	80	76	84	79	75	82	78	74	80	76	73	72																			
5	90	81	75	70	88	80	74	70	78	73	69	76	72	68	75	71	68	66																			
6	85	75	69	64	83	75	69	64	73	68	64	72	67	63	70	66	63	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	76	66	60	55	75	65	59	55	64	59	55	63	58	55	62	58	54	53																			
9	72	62	56	51	71	61	55	51	60	55	51	60	55	51	59	54	51	49																			
10	69	58	52	48	68	58	52	48	57	52	48	56	51	48	55	51	48	46																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	113609
5°	111578
10°	105876
15°	99285
20°	92466
25°	85203
30°	70986
35°	50032
40°	31888
45°	19017
50°	11224
55°	7140
60°	4912
65°	3489
70°	2404
75°	1906
80°	947
85°	0



TEST NUMBER: P844309

CATALOG NUMBER: LD6C30DE010B35 EU6C30B35 6LBMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	189.5	9.0
10°-20°	490.2	23.4
20°-30°	635.2	30.3
30°-40°	471.6	22.5
40°-50°	199.1	9.5
50°-60°	70.7	3.4
60°-70°	27.3	1.3
70°-80°	9.5	0.5
80°-90°	1.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1314.9	62.8
0°-40°	1786.4	85.3
0°-60°	2056.2	98.2
0°-90°	2094.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2094.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2072	
5°	2028	189
15°	1749	490
25°	1409	635
35°	748	472
45°	245	199
55°	75	71
65°	27	27
75°	9	9
85°	0	1
90°	0	



TEST NUMBER: P844309

CATALOG NUMBER: LD6C30DE010B35 EU6C30B35 6LBMH

CANDELA DISTRIBUTION (FULL):

	0°
0°	2072.4
2.5°	2066.4
5°	2027.6
7.5°	1970.7
10°	1902.0
12.5°	1827.2
15°	1749.4
17.5°	1662.7
20°	1585.0
22.5°	1504.3
25°	1408.6
27.5°	1276.9
30°	1121.4
32.5°	939.0
35°	747.6
37.5°	586.1
40°	445.6
42.5°	331.9
45°	245.3
47.5°	179.4
50°	131.6
52.5°	98.7
55°	74.7
57.5°	56.8
60°	44.8
62.5°	32.9
65°	26.9
67.5°	20.9
70°	15.0
72.5°	12.0
75°	9.0
77.5°	6.0
80°	3.0
82.5°	3.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)