

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P844410

Luminaire Tested: **LD6C35DE010B40 EU6C35B40 6LBMGPH**

Issue Date: 5/7/2024



Test Information

Test Method: LM-79-08
Report Number: P844410
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P203577)
Test Lab: INNOVATION CENTER
Issue Date: 5/7/2024
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD6C35DE010B40 EU6C35B40 6LBMGPH
Description:
Light Source: -
Ballast/Driver:

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2028.5 lumens
Efficiency: N/A
Efficacy: 48.6 lumens/watt
Spacing Criteria (0/90/45): 1 / 1 / 0.97
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 41.7
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P844410

CATALOG NUMBER: LD6C35DE010B40 EU6C35B40 6LBMGPH

Luminous Intensity Polar Plot

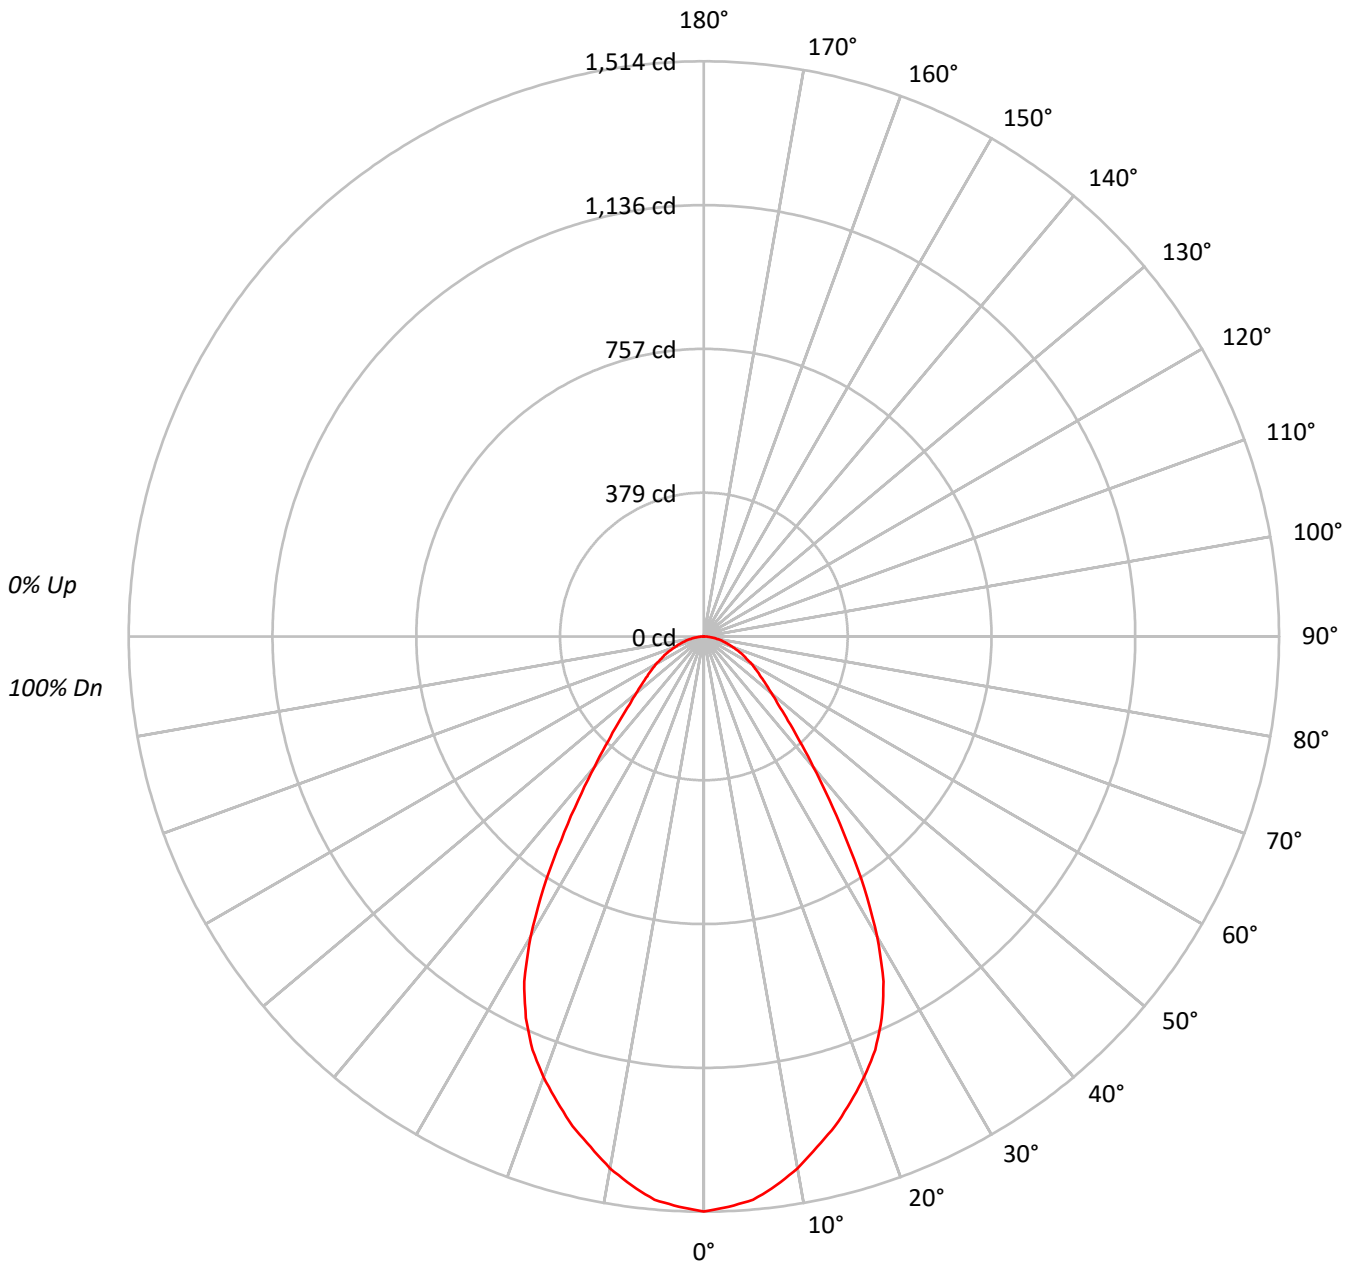



TEST NUMBER: P844410

CATALOG NUMBER: LD6C35DE010B40 EU6C35B40 6LBMGPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	108	104	101	109	105	103	100	101	99	97	98	96	94	94	92	91	89			
2	104	97	92	88	101	96	91	87	92	88	85	89	86	83	86	83	81	79			
3	97	88	82	77	95	87	81	76	84	79	75	82	77	74	79	76	73	71			
4	90	81	74	68	88	80	73	68	77	72	67	75	70	66	73	69	65	64			
5	85	74	67	61	83	73	66	61	71	65	61	69	64	60	68	63	59	58			
6	79	68	61	56	78	68	61	56	66	60	55	64	59	55	63	58	54	53			
7	75	63	56	51	73	63	56	51	61	55	50	60	54	50	59	54	50	48			
8	70	59	52	47	69	58	51	47	57	51	46	56	50	46	55	50	46	44			
9	66	55	48	43	65	54	48	43	53	47	43	52	47	43	51	46	43	41			
10	63	51	45	40	62	51	44	40	50	44	40	49	44	40	48	43	40	38			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	82976
5°	81906
10°	79123
15°	75744
20°	71978
25°	67020
30°	57737
35°	43815
40°	32031
45°	24297
50°	19812
55°	17376
60°	15942
65°	14515
70°	12999
75°	11840
80°	10607
85°	8806



TEST NUMBER: P844410

CATALOG NUMBER: LD6C35DE010B40 EU6C35B40 6LBMGPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	139.8	6.9
10°-20°	374.5	18.5
20°-30°	502.9	24.8
30°-40°	412.5	20.3
40°-50°	247.8	12.2
50°-60°	164.6	8.1
60°-70°	110.3	5.4
70°-80°	59.4	2.9
80°-90°	16.8	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1017.2	50.1
0°-40°	1429.7	70.5
0°-60°	1842.1	90.8
0°-90°	2028.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2028.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1514	
5°	1488	140
15°	1335	375
25°	1108	503
35°	655	412
45°	313	248
55°	182	165
65°	112	110
75°	56	59
85°	14	17
90°	0	



TEST NUMBER: P844410

CATALOG NUMBER: LD6C35DE010B40 EU6C35B40 6LBMGPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1513.6
2.5°	1502.4
5°	1488.4
7.5°	1457.6
10°	1421.4
12.5°	1376.5
15°	1334.6
17.5°	1284.2
20°	1233.8
22.5°	1177.9
25°	1108.0
27.5°	1024.0
30°	912.1
32.5°	786.1
35°	654.7
37.5°	542.8
40°	447.6
42.5°	372.2
45°	313.4
47.5°	265.8
50°	232.3
52.5°	204.2
55°	181.8
57.5°	162.2
60°	145.4
62.5°	125.9
65°	111.9
67.5°	95.2
70°	81.1
72.5°	67.2
75°	55.9
77.5°	44.7
80°	33.6
82.5°	25.2
85°	14.0
87.5°	5.6
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)