

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P246330

Luminaire Tested: **LSR8B10D010 EC8B10835 8LBN0B**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P246330
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P201749)
Test Lab: INNOVATION CENTER-P1
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B10D010 EC8B10835 8LBN0B
Description: PORTFOLIO 8 INCH NARROW DISTRIBUTION 50 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
80 CRI 3500 CCT WITH SPECULAR BLACK TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: 1887 (1 lamp)
Luminaire Lumens: 676.0 lumens
Efficiency: 35.8%
Efficacy: 66.3 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.77
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 10.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P246330

CATALOG NUMBER: LSR8B10D010 EC8B10835 8LBN0B

Luminous Intensity Polar Plot

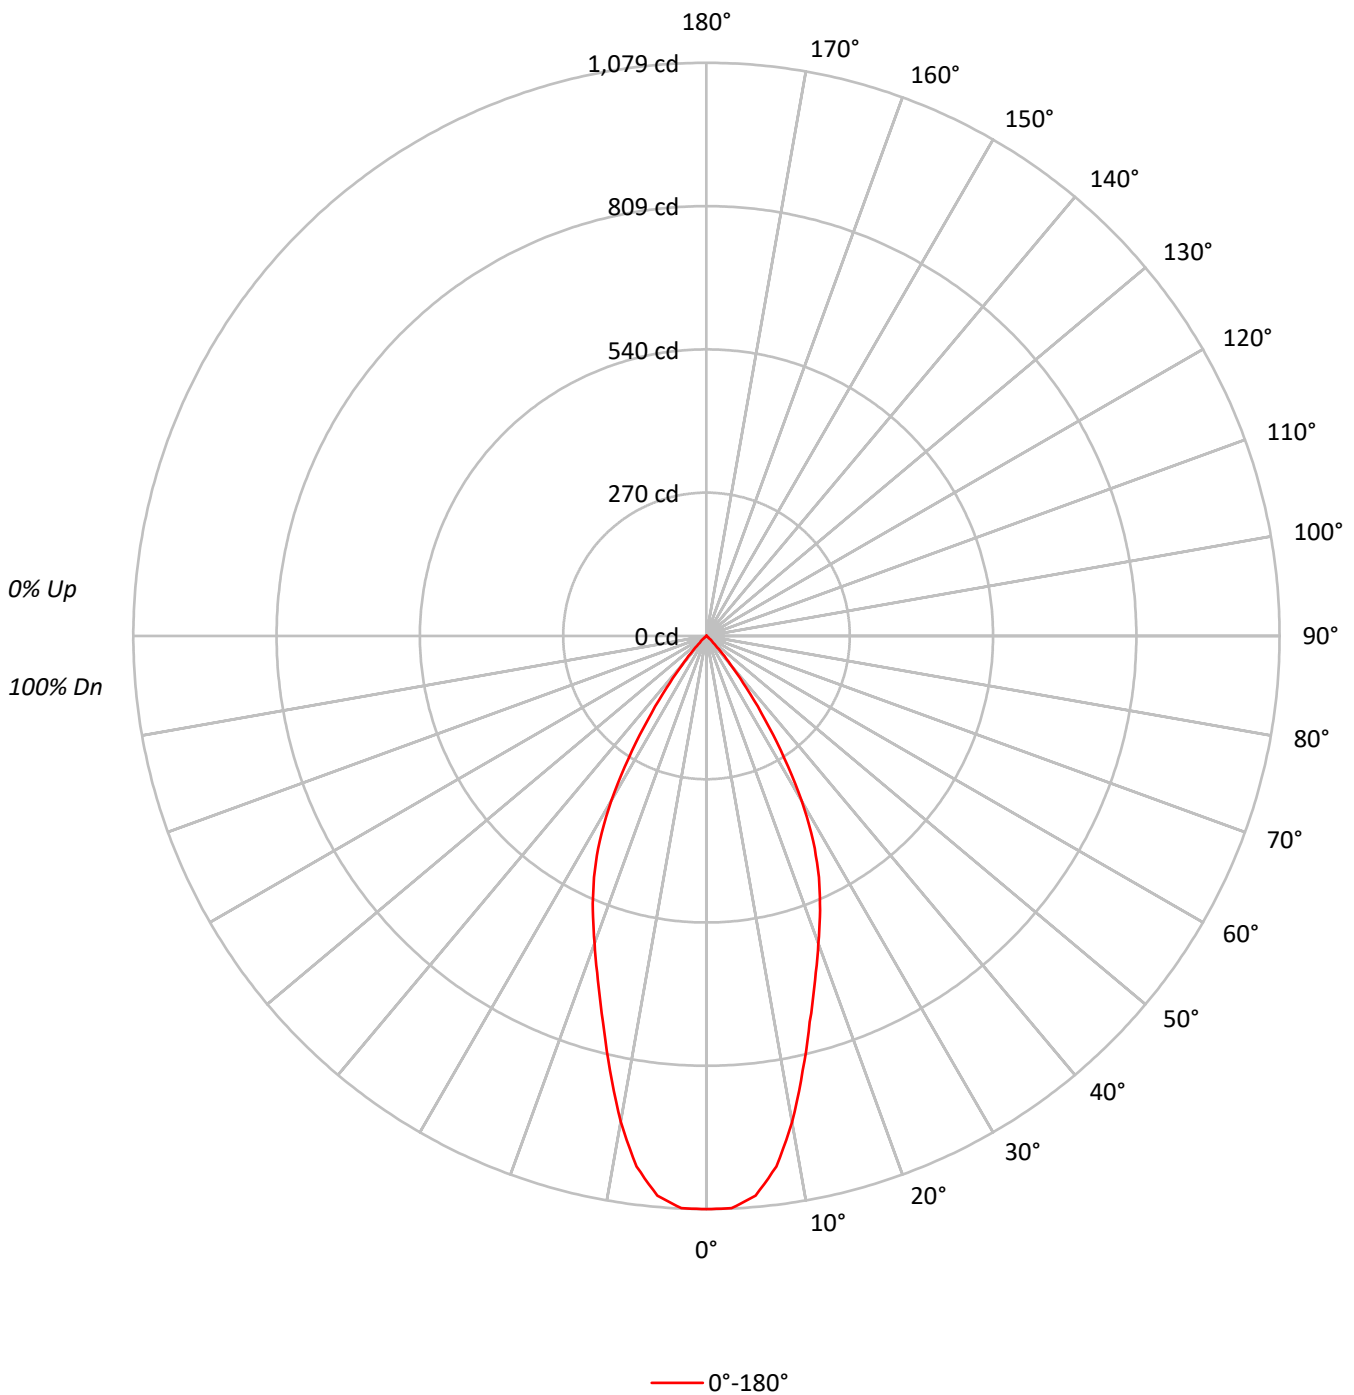



TEST NUMBER: P246330

CATALOG NUMBER: LSR8B10D010 EC8B10835 8LBN0B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	43	43	43	43	42	42	42	42	40	40	40	38	38	38	37	37	37	36
1	41	40	39	38	40	39	38	38	38	37	37	36	36	35	35	35	34	34
2	39	37	36	35	38	37	36	35	36	35	34	35	34	33	34	33	32	32
3	37	35	33	32	37	35	33	32	34	32	31	33	32	31	32	31	30	30
4	36	33	31	30	35	33	31	30	32	30	29	31	30	29	31	29	29	28
5	34	31	29	28	33	31	29	28	30	29	27	30	28	27	29	28	27	26
6	32	29	27	26	32	29	27	26	29	27	26	28	27	26	28	26	25	25
7	31	28	26	24	30	28	26	24	27	25	24	27	25	24	26	25	24	24
8	30	26	24	23	29	26	24	23	26	24	23	25	24	23	25	24	23	22
9	28	25	23	22	28	25	23	22	25	23	22	24	23	22	24	23	22	21
10	27	24	22	21	27	24	22	21	23	22	21	23	22	21	23	21	20	20

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	33272
5°	32746
10°	29092
15°	24004
20°	20211
25°	17046
30°	12769
35°	7220
40°	2850
45°	763
50°	154
55°	0
60°	25
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P246330

CATALOG NUMBER: LSR8B10D010 EC8B10835 8LBN0B

ZONAL LUMENS:

CANDELA DISTRIBUTION:

Zone	Lumens	% Fixture	% Lamp	0°	Flux	
0°-10°	96.8	14.3	5.1	0°	1079	
10°-20°	211.0	31.2	11.2	5°	1058	97
20°-30°	226.0	33.4	12.0	15°	752	211
30°-40°	122.5	18.1	6.5	25°	501	226
40°-50°	19.0	2.8	1.0	35°	192	122
50°-60°	0.6	0.1	0.0	45°	18	19
60°-70°	0.1	0.0	0.0	55°	0	1
70°-80°	0.0	0.0	0.0	65°	0	0
80°-90°	0.0	0.0	0.0	75°	0	0
90°-100°	0.0	0.0	0.0	85°	0	0
100°-110°	0.0	0.0	0.0	90°	0	0
110°-120°	0.0	0.0	0.0	95°	0	0
120°-130°	0.0	0.0	0.0	105°	0	0
130°-140°	0.0	0.0	0.0	115°	0	0
140°-150°	0.0	0.0	0.0	125°	0	0
150°-160°	0.0	0.0	0.0	135°	0	0
160°-170°	0.0	0.0	0.0	145°	0	0
170°-180°	0.0	0.0	0.0	155°	0	0
0°-30°	533.8	79.0	28.3	165°	0	0
0°-40°	656.3	97.1	34.8	175°	0	0
0°-60°	675.9	100.0	35.8	180°	0	0
0°-90°	676.0	100.0	35.8			
90°-120°	0.0	0.0	0.0			
90°-150°	0.0	0.0	0.0			
90°-180°	0.0	0.0	0.0			
0°-180°	676.0	100.0	35.8			



TEST NUMBER: P246330

CATALOG NUMBER: LSR8B10D010 EC8B10835 8LBN0B

CANDELA DISTRIBUTION (FULL):

0°	
0°	1079.0
2.5°	1078.3
5°	1057.9
7.5°	1007.5
10°	929.1
12.5°	837.8
15°	751.9
17.5°	679.3
20°	615.9
22.5°	559.0
25°	501.0
27.5°	435.6
30°	358.6
32.5°	273.4
35°	191.8
37.5°	122.8
40°	70.8
42.5°	37.9
45°	17.5
47.5°	9.3
50°	3.2
52.5°	0.4
55°	0.0
57.5°	0.4
60°	0.4
62.5°	0.0
65°	0.0
67.5°	0.4
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0
92.5°	0.0
95°	0.0
97.5°	0.0
100°	0.0
102.5°	0.0
105°	0.0
107.5°	0.0
110°	0.0



TEST NUMBER: P246330

CATALOG NUMBER: LSR8B10D010 EC8B10835 8LBN0B

CANDELA DISTRIBUTION (continued):

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)