

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P245322

Luminaire Tested: **LSR8B10D010 EC8B10835 8LBS0WH**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P245322  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-15)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LSR8B10D010 EC8B10835 8LBS0WH  
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED  
DOWNLIGHT- CYLINDEC  
80 CRI 3500 CCT WITH WHEAT TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1212.1 lumens  
Efficiency: N/A  
Efficacy: 118.8 lumens/watt  
Spacing Criteria (0/90/45): 1.27 / 1.27 / 1.23  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 10.2  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P245322

CATALOG NUMBER: LSR8B10D010 EC8B10835 8LBS0WH

### Luminous Intensity Polar Plot

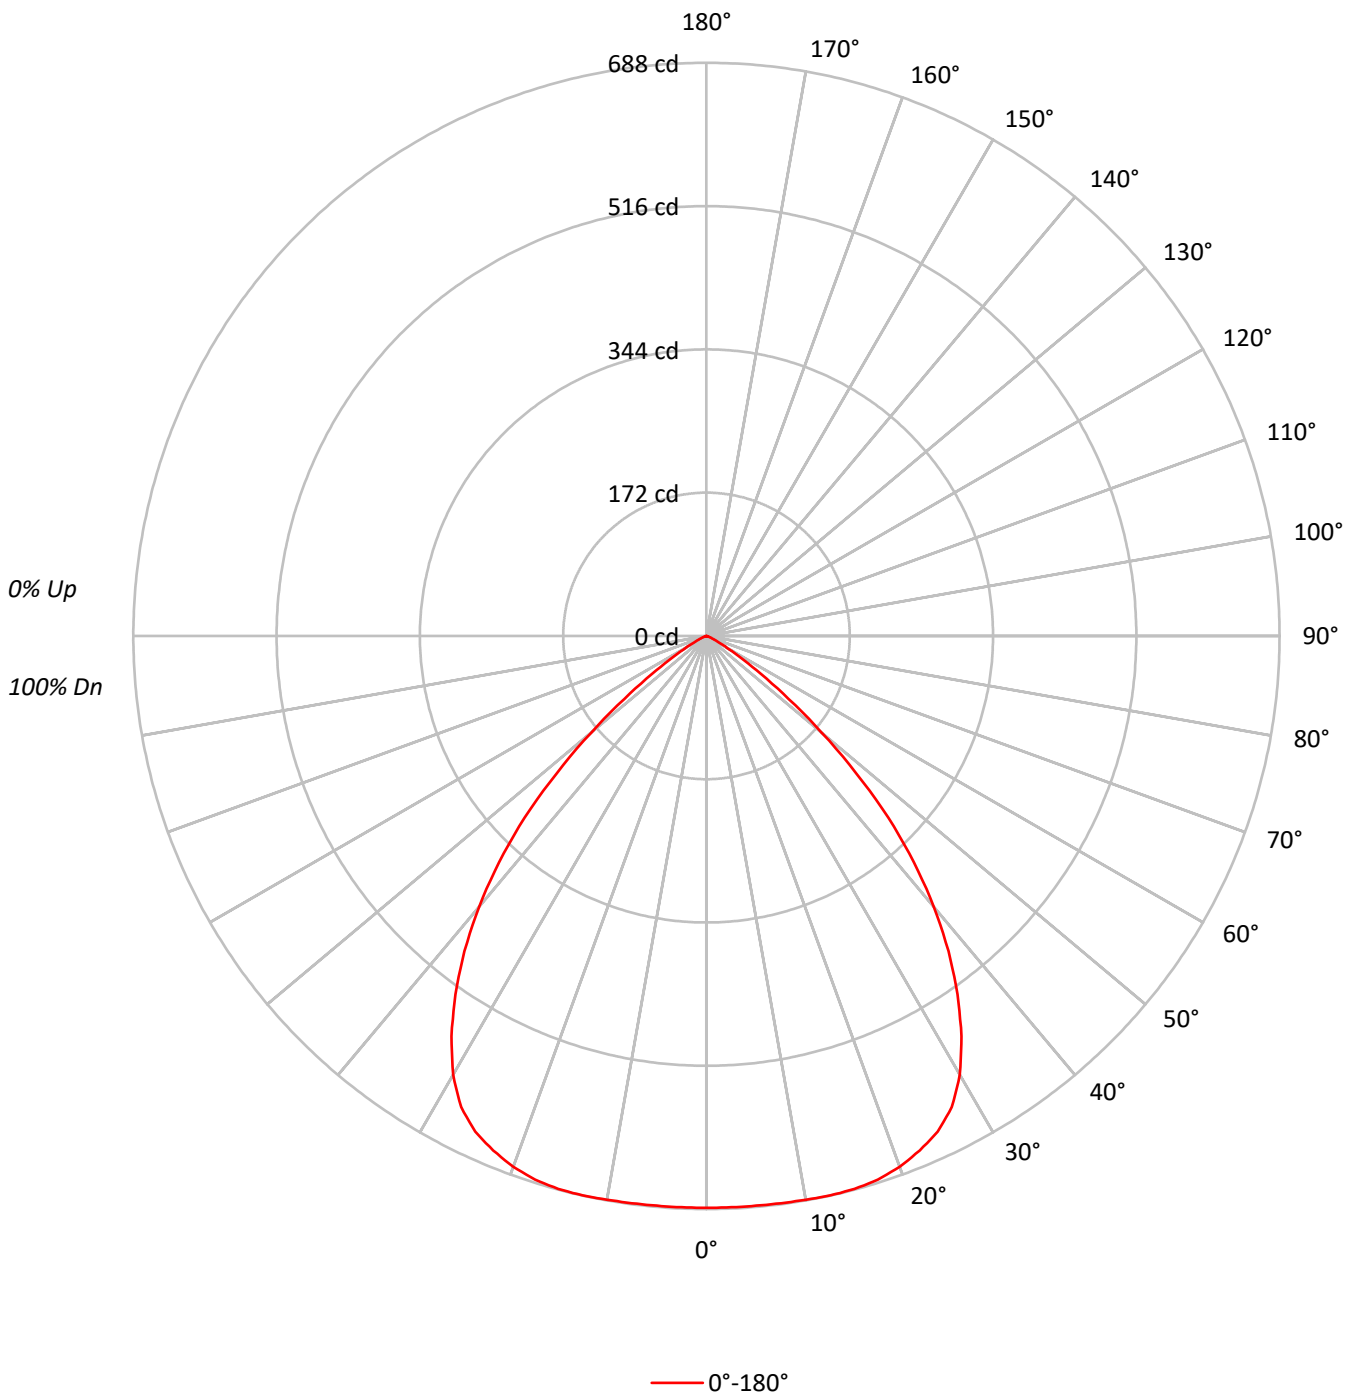



TEST NUMBER: P245322

CATALOG NUMBER: LSR8B10D010 EC8B10835 8LBS0WH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	104	110	107	104	102	103	101	99	99	97	96	96	94	93	91
2	105	100	95	91	103	98	93	90	94	91	88	91	88	86	89	86	84	82
3	99	91	85	80	96	89	84	79	87	82	78	84	80	77	82	78	76	74
4	92	83	76	71	90	82	76	71	79	74	70	77	73	69	75	71	68	66
5	86	76	69	64	84	75	68	63	73	67	63	71	66	62	70	65	62	60
6	80	70	63	57	79	69	62	57	67	61	57	66	60	56	64	60	56	54
7	75	64	57	52	74	63	57	52	62	56	51	61	55	51	60	55	51	49
8	71	59	52	47	69	59	52	47	57	51	47	56	51	47	55	50	46	45
9	66	55	48	43	65	54	48	43	53	47	43	52	47	43	51	46	43	41
10	63	51	44	40	61	51	44	40	50	44	39	49	43	39	48	43	39	38

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	21169
5°	21250
10°	21518
15°	21938
20°	22252
25°	22344
30°	21660
35°	19767
40°	17100
45°	13462
50°	8683
55°	4263
60°	1752
65°	766
70°	225
75°	83
80°	71
85°	0



TEST NUMBER: P245322

CATALOG NUMBER: LSR8B10D010 EC8B10835 8LBS0WH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	65.6	5.4
10°-20°	194.2	16.0
20°-30°	300.7	24.8
30°-40°	325.7	26.9
40°-50°	234.4	19.3
50°-60°	78.4	6.5
60°-70°	11.9	1.0
70°-80°	1.0	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	560.4	46.2
0°-40°	886.2	73.1
0°-60°	1199.0	98.9
0°-90°	1212.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1212.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	686	
5°	686	66
15°	687	194
25°	657	301
35°	525	326
45°	309	234
55°	79	78
65°	10	12
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P245322

CATALOG NUMBER: LSR8B10D010 EC8B10835 8LBS0WH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	686.5
2.5°	686.5
5°	686.5
7.5°	686.8
10°	687.2
12.5°	687.9
15°	687.2
17.5°	684.4
20°	678.1
22.5°	668.6
25°	656.7
27.5°	637.7
30°	608.3
32.5°	569.7
35°	525.1
37.5°	477.1
40°	424.8
42.5°	368.7
45°	308.7
47.5°	243.8
50°	181.0
52.5°	124.2
55°	79.3
57.5°	47.4
60°	28.4
62.5°	17.2
65°	10.5
67.5°	5.3
70°	2.5
72.5°	1.1
75°	0.7
77.5°	0.7
80°	0.4
82.5°	0.4
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)