

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P244368

Luminaire Tested: **LSR8B10D010 EC8B10930 8LBN0H**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P244368  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P27944)  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LSR8B10D010 EC8B10930 8LBN0H  
Description: PORTFOLIO 8 INCH NARROW DISTRIBUTION 50 DEGREE CUTOFF RECESSED  
DOWNLIGHT- CYLINDEC  
97 CRI 3000 CCT WITH SEMI-SPECULAR CLEAR TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 863.2 lumens  
Efficiency: N/A  
Efficacy: 84.6 lumens/watt  
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.79  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 10.2  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P244368

CATALOG NUMBER: LSR8B10D010 EC8B10930 8LBN0H

### Luminous Intensity Polar Plot

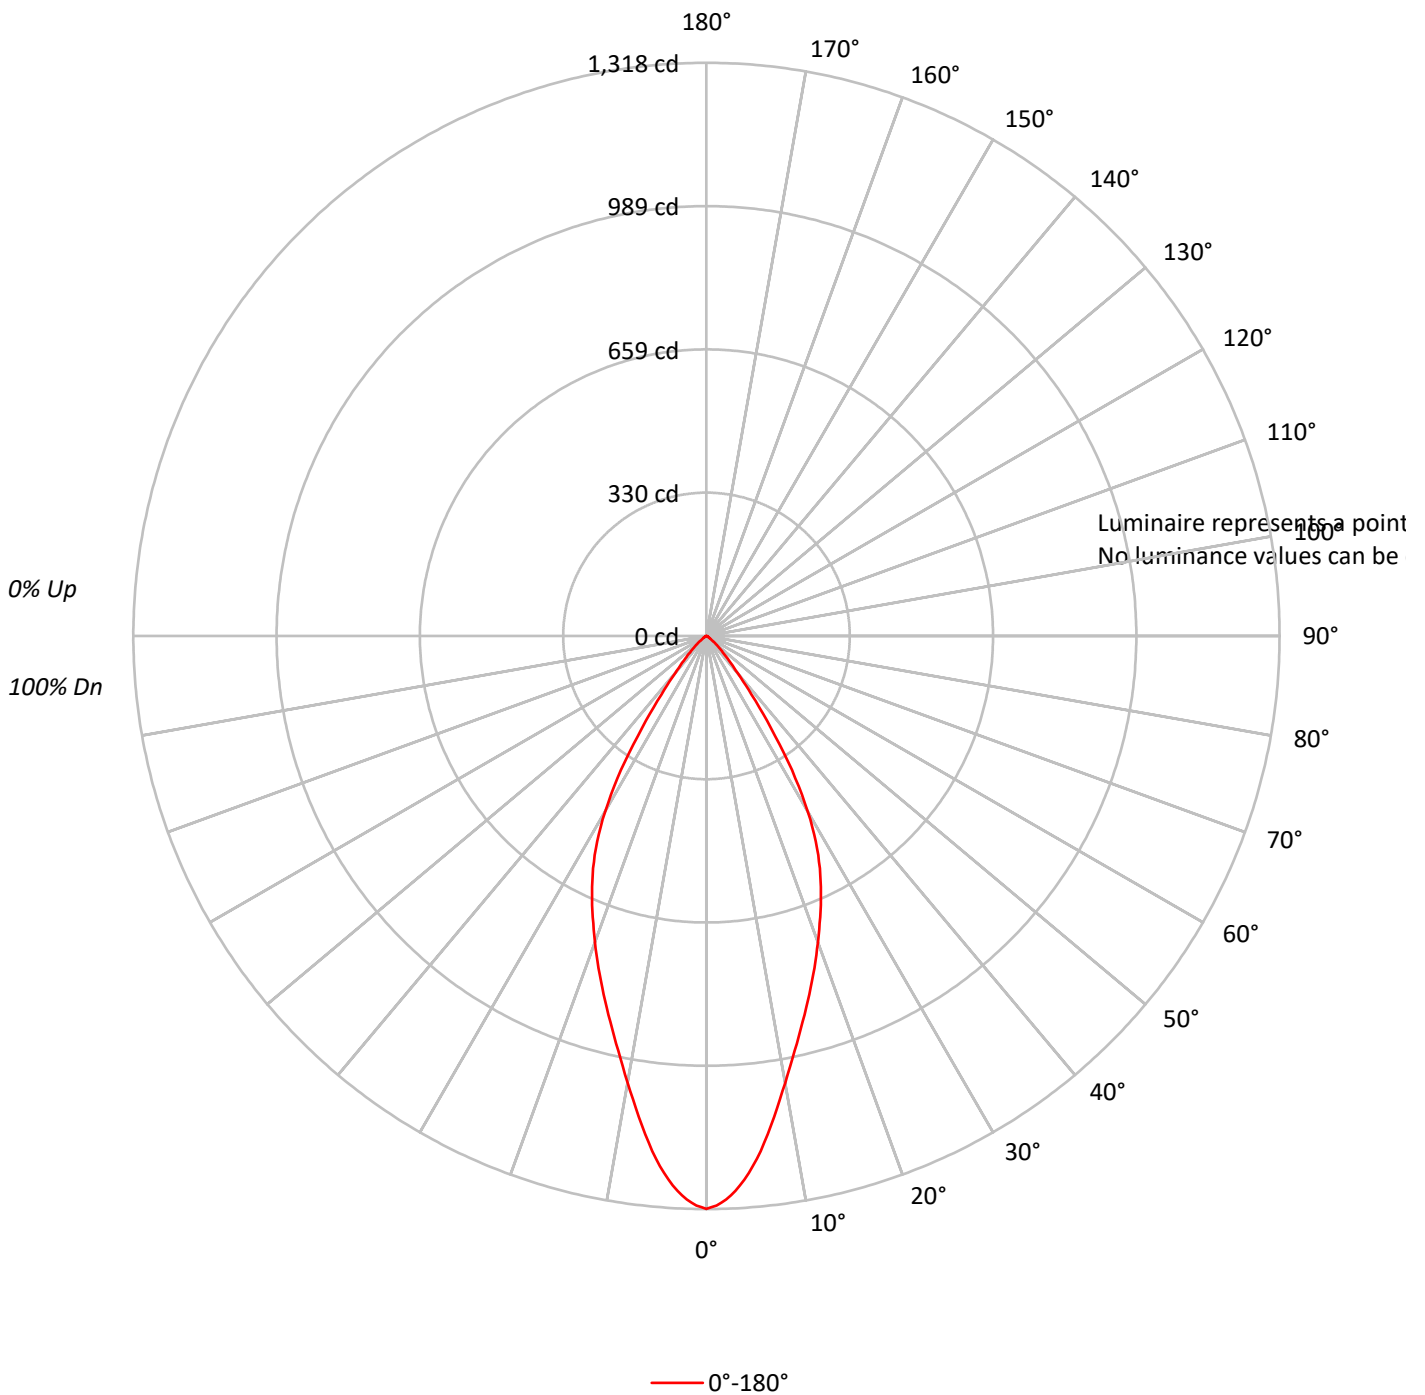



TEST NUMBER: P244368

CATALOG NUMBER: LSR8B10D010 EC8B10930 8LBN0H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	106	111	109	107	105	105	103	101		101	100	98		98	97	96	94
2	108	104	100	96	106	102	98	95	99	96	93		96	93	91		93	91	89	88
3	103	97	92	88	101	95	91	87	93	89	86		90	87	85		88	86	83	82
4	98	91	85	81	96	90	85	81	87	83	80		85	82	79		84	80	78	76
5	93	85	79	75	92	84	79	75	82	78	74		81	77	74		79	76	73	72
6	89	80	74	70	87	79	74	70	78	73	69		76	72	69		75	71	69	67
7	85	76	70	66	83	75	69	65	74	69	65		72	68	65		71	67	64	63
8	81	71	66	62	79	71	65	61	70	65	61		69	64	61		68	64	61	59
9	77	68	62	58	76	67	62	58	66	61	58		65	61	58		64	60	57	56
10	74	64	59	55	73	64	58	55	63	58	55		62	58	54		61	57	54	53

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P244368

CATALOG NUMBER: LSR8B10D010 EC8B10930 8LBN0H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	110.8	12.8
10°-20°	247.6	28.7
20°-30°	281.5	32.6
30°-40°	165.3	19.2
40°-50°	44.4	5.1
50°-60°	10.5	1.2
60°-70°	2.5	0.3
70°-80°	0.6	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	640.0	74.1
0°-40°	805.3	93.3
0°-60°	860.2	99.6
0°-90°	863.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	863.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1318	
5°	1224	111
15°	886	248
25°	621	282
35°	257	165
45°	53	44
55°	10	11
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P244368

CATALOG NUMBER: LSR8B10D010 EC8B10930 8LBN0H

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1317.6
1°	1310.3
2°	1296.9
3°	1277.9
4°	1253.5
5°	1224.4
6°	1191.4
7°	1154.1
8°	1116.7
9°	1079.2
10°	1043.3
11°	1008.3
12°	975.4
13°	944.8
14°	914.2
15°	885.6
16°	857.7
17°	830.0
18°	803.1
19°	776.0
20°	749.5
21°	722.9
22°	697.6
23°	672.5
24°	646.8
25°	621.3
26°	594.7
27°	565.9
28°	535.5
29°	502.3
30°	466.4
32.5°	365.9
35°	257.4
37.5°	169.6
40°	111.1
42.5°	76.7
45°	53.0
47.5°	36.4
50°	24.2
52.5°	15.7
55°	10.5
57.5°	7.0
60°	4.7
62.5°	3.3
65°	2.4



TEST NUMBER: P244368

CATALOG NUMBER: LSR8B10D010 EC8B10930 8LBN0H

**CANDELA DISTRIBUTION (continued):**

	0°
67.5°	1.5
70°	0.9
72.5°	0.6
75°	0.6
77.5°	0.3
80°	0.3
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)