

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P246444

Luminaire Tested: **LSR8B10D010 EC8B10950 8LBM0B**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P246444  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P201569)  
Test Lab: INNOVATION CENTER-P1  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LSR8B10D010 EC8B10950 8LBM0B  
Description: PORTFOLIO 8 INCH MEDIUM DISTRIBUTION 55 DEG CUTOFF RECESSED  
DOWNLIGHT- CYLINDEC  
90 CRI 5000 CCT WITH SPECULAR BLACK TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 661.0 lumens  
Efficiency: N/A  
Efficacy: 64.8 lumens/watt  
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.87  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 10.2  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P246444

CATALOG NUMBER: LSR8B10D010 EC8B10950 8LBM0B

### Luminous Intensity Polar Plot

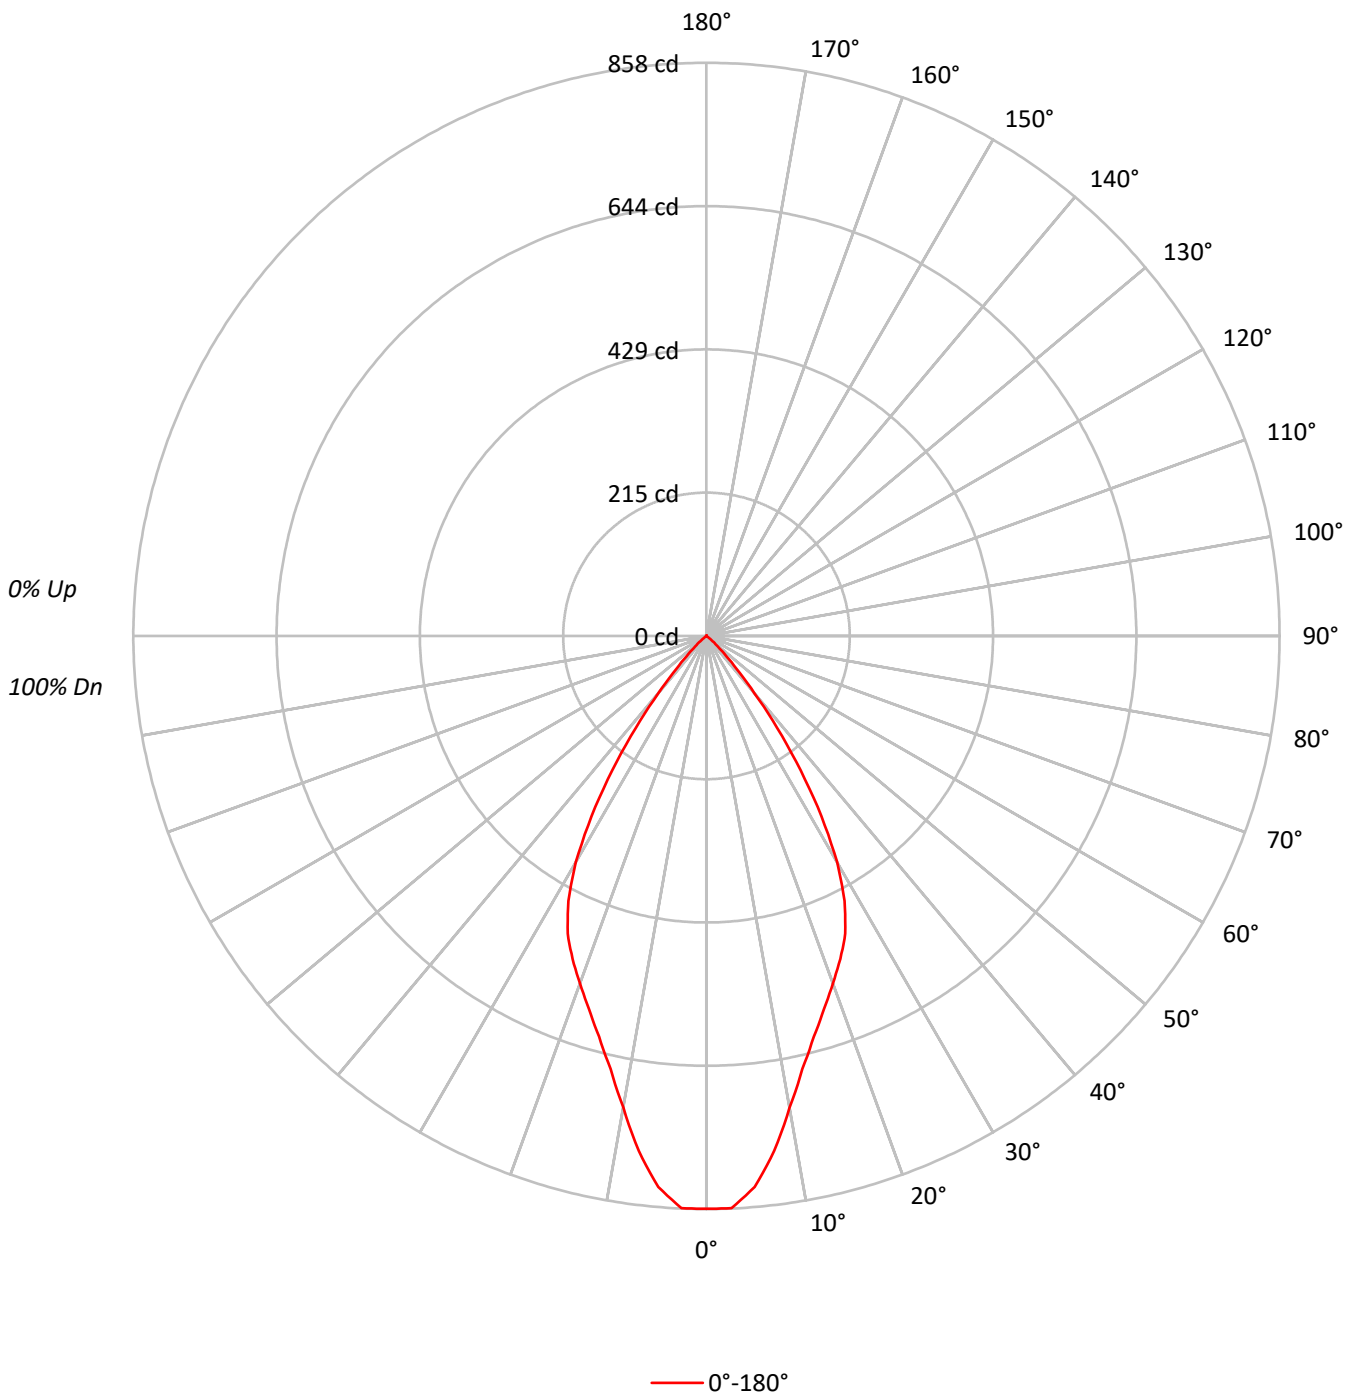



TEST NUMBER: P246444

CATALOG NUMBER: LSR8B10D010 EC8B10950 8LBM0B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	108	106	111	109	107	105	105	103	101	101	100	98	98	97	96	94
2	108	103	99	96	106	102	98	95	98	95	93	95	93	91	93	91	89	87
3	103	96	92	88	101	95	91	87	93	89	86	90	87	84	88	85	83	81
4	98	90	85	81	96	89	84	80	87	83	79	85	81	78	83	80	77	76
5	93	85	79	75	91	84	78	74	82	77	74	80	76	73	79	75	72	71
6	88	79	74	69	87	79	73	69	77	72	69	76	71	68	74	71	68	66
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	70	66	63	62
8	80	70	64	60	79	70	64	60	69	64	60	68	63	60	67	63	60	58
9	76	66	61	57	75	66	60	57	65	60	56	64	60	56	63	59	56	55
10	72	63	57	53	71	62	57	53	62	57	53	61	56	53	60	56	53	52

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	26442
5°	25633
10°	22451
15°	19822
20°	18160
25°	16726
30°	13922
35°	9245
40°	4500
45°	1627
50°	494
55°	32
60°	0
65°	22
70°	0
75°	0
80°	53
85°	0



TEST NUMBER: P246444

CATALOG NUMBER: LSR8B10D010 EC8B10950 8LBM0B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	75.4	11.4
10°-20°	175.2	26.5
20°-30°	221.7	33.5
30°-40°	152.1	23.0
40°-50°	34.6	5.2
50°-60°	1.7	0.3
60°-70°	0.1	0.0
70°-80°	0.1	0.0
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	472.3	71.4
0°-40°	624.4	94.5
0°-60°	660.7	100.0
0°-90°	661.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	661.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	858	
5°	828	75
15°	621	175
25°	492	222
35°	246	152
45°	37	35
55°	1	2
65°	0	0
75°	0	0
85°	0	0
90°	0	0
95°	0	0
105°	0	0
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0



TEST NUMBER: P246444

CATALOG NUMBER: LSR8B10D010 EC8B10950 8LBM0B

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	857.5
2.5°	857.5
5°	828.1
7.5°	777.6
10°	717.0
12.5°	663.7
15°	620.9
17.5°	585.2
20°	553.4
22.5°	523.4
25°	491.6
27.5°	447.4
30°	391.0
32.5°	320.2
35°	245.6
37.5°	173.6
40°	111.8
42.5°	65.8
45°	37.3
47.5°	20.0
50°	10.3
52.5°	1.8
55°	0.6
57.5°	0.3
60°	0.0
62.5°	0.0
65°	0.3
67.5°	0.0
70°	0.0
72.5°	0.3
75°	0.0
77.5°	0.0
80°	0.3
82.5°	0.0
85°	0.0
87.5°	0.3
90°	0.0
92.5°	0.0
95°	0.0
97.5°	0.0
100°	0.0
102.5°	0.0
105°	0.0
107.5°	0.0
110°	0.0



TEST NUMBER: P246444

CATALOG NUMBER: LSR8B10D010 EC8B10950 8LBM0B

**CANDELA DISTRIBUTION (continued):**

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)