

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P244447

Luminaire Tested: **LSR8B15D010 EC8B15827 8LBS0H**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P244447
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-13)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B15D010 EC8B15827 8LBS0H
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
80 CRI 2700 CCT WITH SEMI-SPECULAR CLEAR TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1570.0 lumens
Efficiency: N/A
Efficacy: 109.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.23
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 14.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P244447

CATALOG NUMBER: LSR8B15D010 EC8B15827 8LBS0H

Luminous Intensity Polar Plot

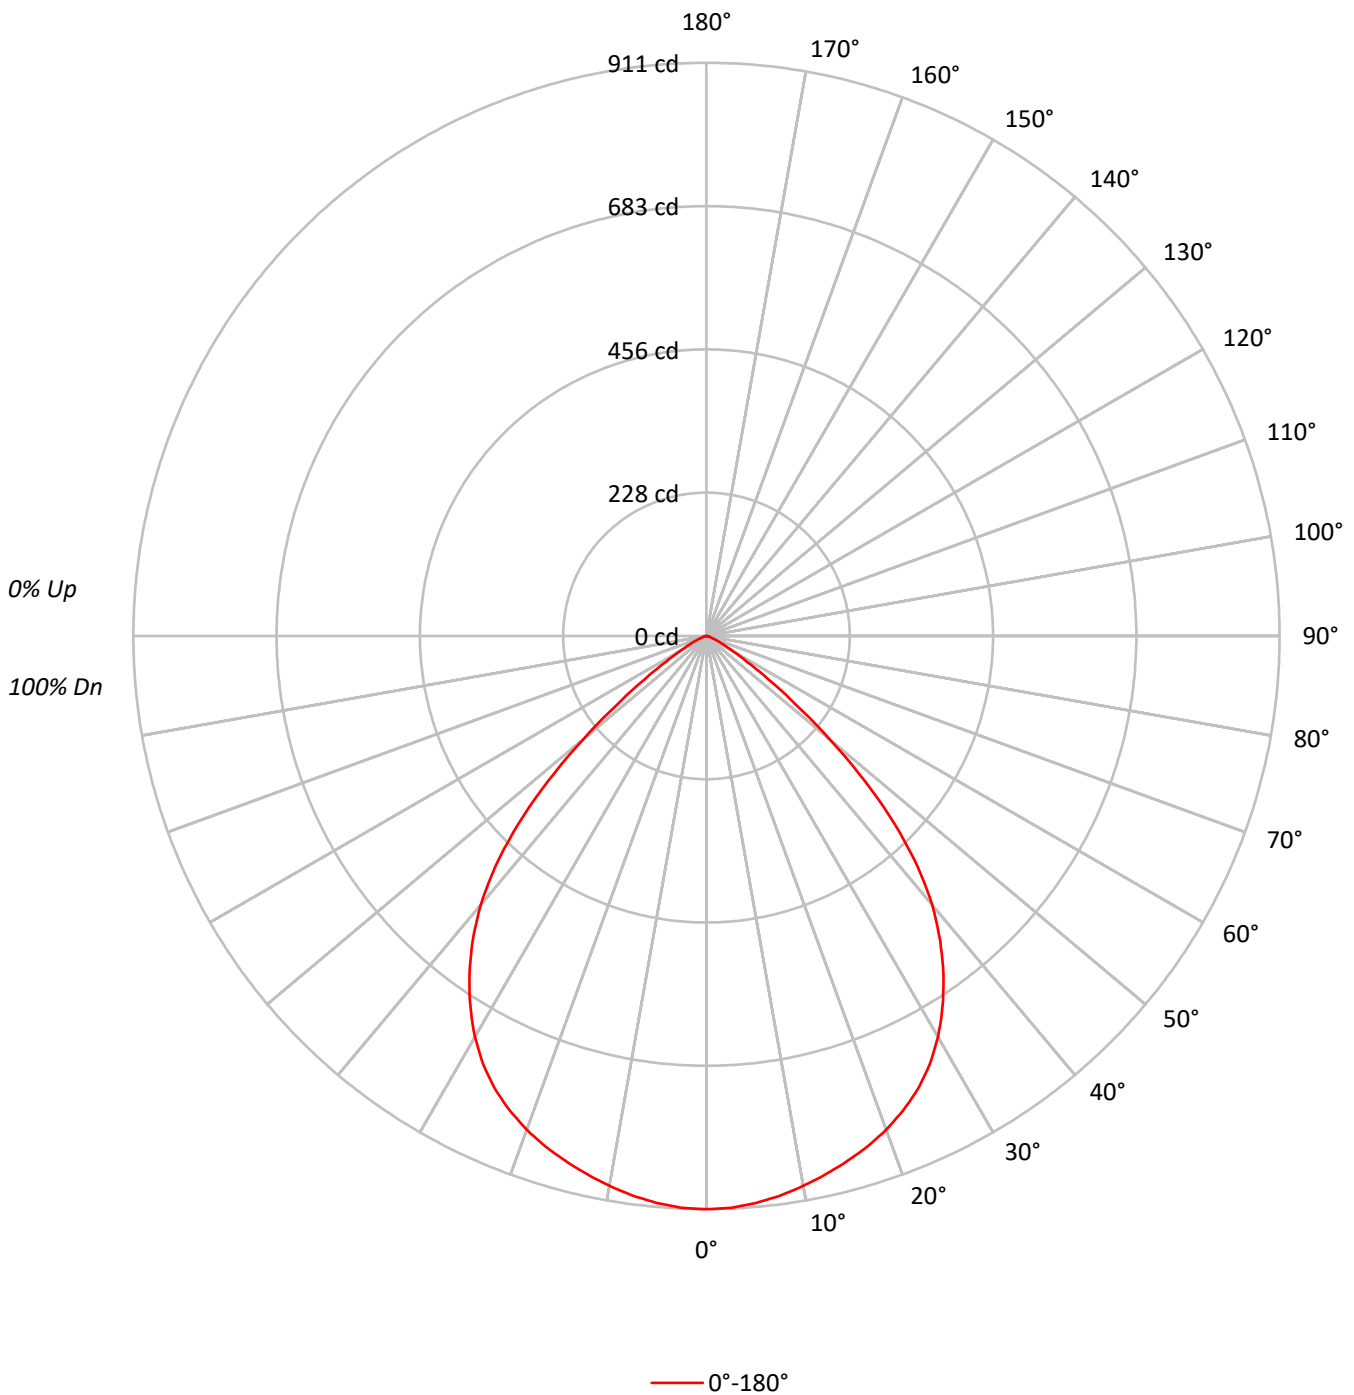



TEST NUMBER: P244447

CATALOG NUMBER: LSR8B15D010 EC8B15827 8LBS0H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	107	104	102	103	100	98	99	97	95	95	94	93	91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81
3	98	90	84	79	96	89	83	78	86	81	77	83	79	76	81	78	75	73
4	91	82	75	70	89	81	75	70	79	73	69	76	72	68	74	70	67	65
5	85	75	68	63	83	74	67	62	72	66	62	70	65	61	69	64	60	59
6	80	69	61	56	78	68	61	56	66	60	56	65	59	55	63	58	55	53
7	75	63	56	51	73	63	56	51	61	55	50	60	54	50	59	54	50	48
8	70	58	51	46	68	58	51	46	57	50	46	55	50	46	54	49	45	44
9	66	54	47	42	64	53	47	42	52	46	42	51	46	42	51	45	42	40
10	62	50	43	39	61	50	43	39	49	43	38	48	42	38	47	42	38	37

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	28095
5°	28001
10°	27789
15°	27595
20°	27407
25°	27046
30°	26210
35°	24728
40°	22474
45°	18495
50°	12324
55°	6419
60°	3028
65°	1591
70°	793
75°	548
80°	408
85°	318



TEST NUMBER: P244447

CATALOG NUMBER: LSR8B15D010 EC8B15827 8LBS0H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	85.8	5.5
10°-20°	244.0	15.5
20°-30°	365.0	23.2
30°-40°	408.2	26.0
40°-50°	320.2	20.4
50°-60°	116.8	7.4
60°-70°	23.8	1.5
70°-80°	5.1	0.3
80°-90°	1.1	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	694.7	44.3
0°-40°	1102.9	70.2
0°-60°	1540.0	98.1
0°-90°	1570.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1570.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	911	
5°	905	86
15°	864	244
25°	795	365
35°	657	408
45°	424	320
55°	119	117
65°	22	24
75°	5	5
85°	1	1
90°	0	



TEST NUMBER: P244447

CATALOG NUMBER: LSR8B15D010 EC8B15827 8LBS0H

CANDELA DISTRIBUTION (FULL):

0°	
0°	911.1
2.5°	909.7
5°	904.6
7.5°	897.2
10°	887.5
12.5°	876.4
15°	864.4
17.5°	850.9
20°	835.2
22.5°	816.7
25°	794.9
27.5°	768.1
30°	736.1
32.5°	698.6
35°	656.9
37.5°	610.2
40°	558.3
42.5°	496.8
45°	424.1
47.5°	342.1
50°	256.9
52.5°	180.1
55°	119.4
57.5°	76.4
60°	49.1
62.5°	32.4
65°	21.8
67.5°	13.9
70°	8.8
72.5°	6.0
75°	4.6
77.5°	3.2
80°	2.3
82.5°	1.4
85°	0.9
87.5°	0.5
90°	0.0

(END OF REPORT)