

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P245809

Luminaire Tested: **LSR8B15D010 EC8B15930 8LBS0GPH**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P245809
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-16)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B15D010 EC8B15930 8LBS0GPH
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
97 CRI 3000 CCT WITH GRAPHITE TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1260.0 lumens
Efficiency: N/A
Efficacy: 87.5 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.25
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P245809

CATALOG NUMBER: LSR8B15D010 EC8B15930 8LBS0GPH

Luminous Intensity Polar Plot

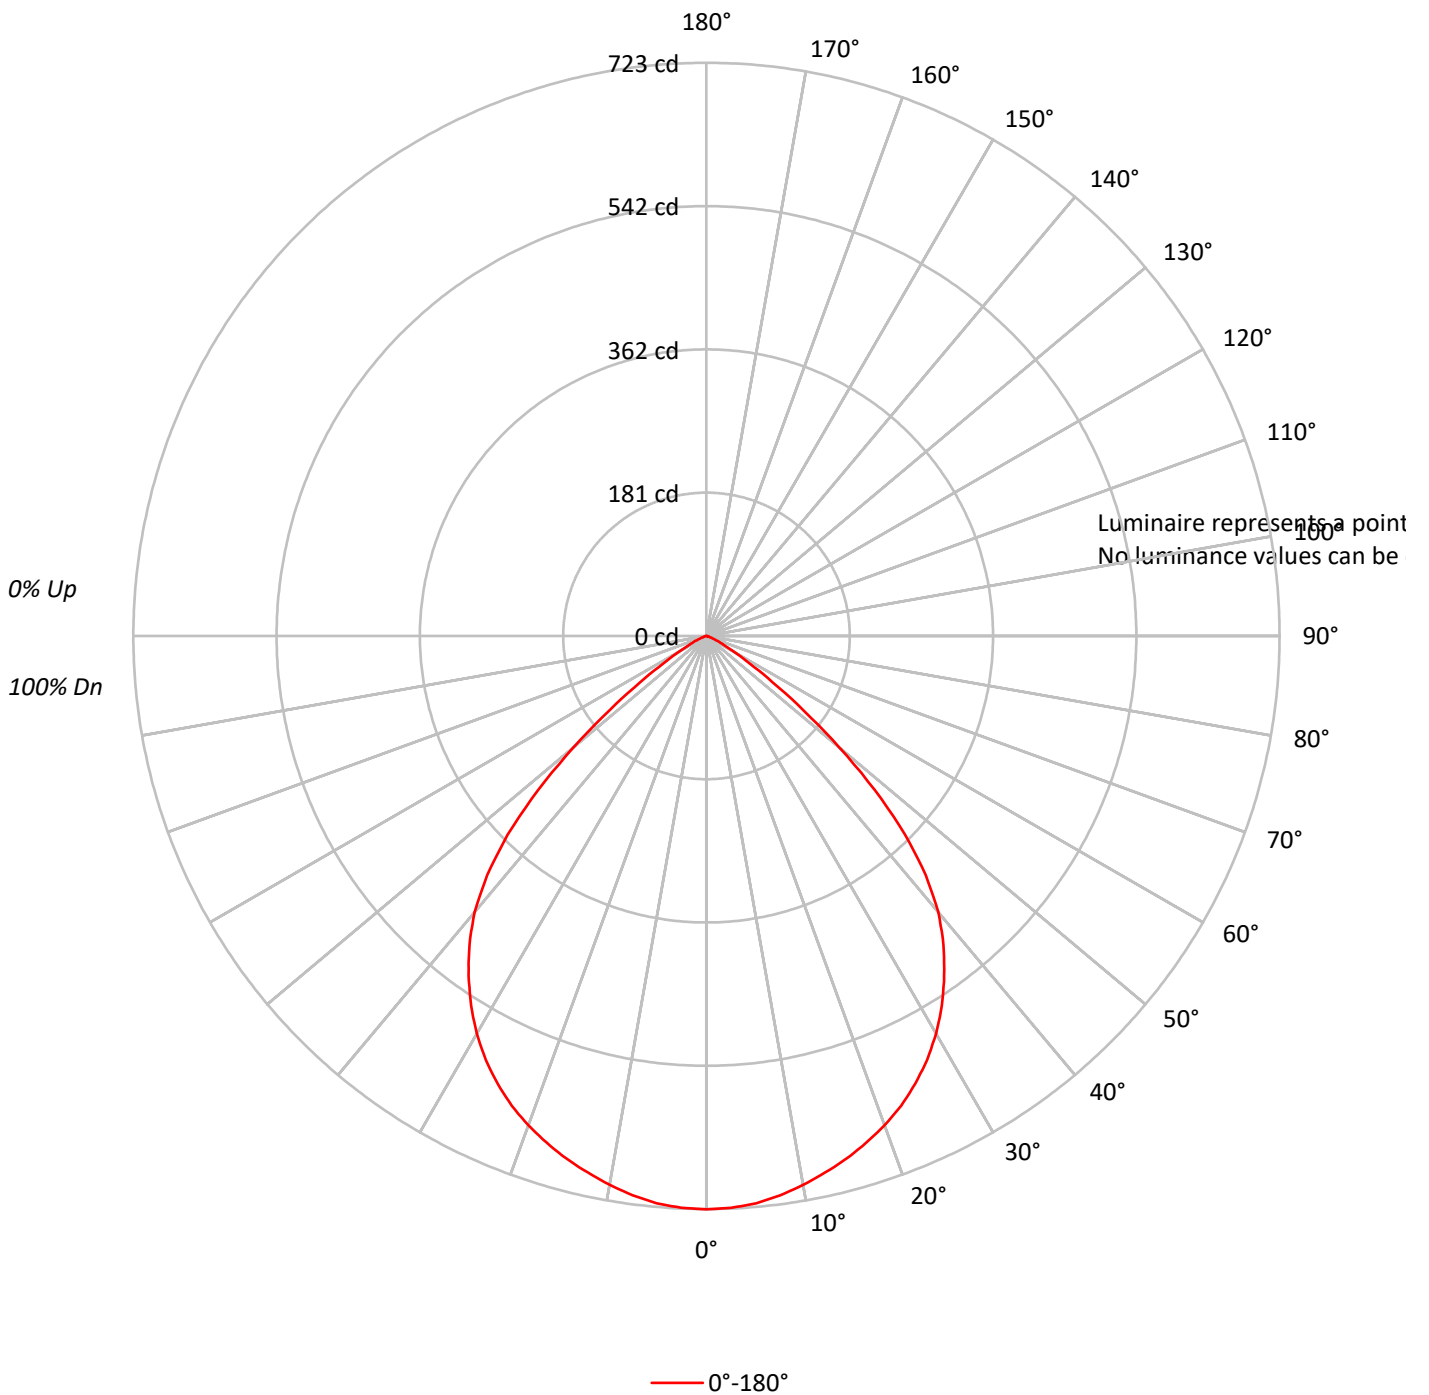



TEST NUMBER: P245809

CATALOG NUMBER: LSR8B15D010 EC8B15930 8LBS0GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	107	104	102	103	100	98	99	97	95	95	94	93	91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81
3	98	90	84	79	96	88	83	78	86	81	77	83	79	76	81	77	74	73
4	91	82	75	70	89	81	74	69	78	73	69	76	72	68	74	70	67	65
5	85	75	68	62	83	74	67	62	72	66	61	70	65	61	68	64	60	58
6	79	69	61	56	78	68	61	56	66	60	55	64	59	55	63	58	54	53
7	74	63	56	50	73	62	55	50	61	55	50	59	54	50	58	53	49	48
8	70	58	51	46	68	57	50	46	56	50	45	55	49	45	54	49	45	43
9	65	54	47	42	64	53	46	42	52	46	41	51	45	41	50	45	41	40
10	62	50	43	38	60	49	43	38	48	42	38	48	42	38	47	42	38	36

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P245809

CATALOG NUMBER: LSR8B15D010 EC8B15930 8LBS0GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	68.1	5.4
10°-20°	192.5	15.3
20°-30°	286.6	22.7
30°-40°	325.8	25.9
40°-50°	266.4	21.1
50°-60°	99.3	7.9
60°-70°	18.1	1.4
70°-80°	2.8	0.2
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	547.2	43.4
0°-40°	872.9	69.3
0°-60°	1238.6	98.3
0°-90°	1260.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1260.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	723	
5°	718	68
15°	683	193
25°	623	287
35°	523	326
45°	354	266
55°	102	99
65°	16	18
75°	2	3
85°	0	0
90°	0	



TEST NUMBER: P245809

CATALOG NUMBER: LSR8B15D010 EC8B15930 8LBS0GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	723.3
2.5°	722.0
5°	718.3
7.5°	711.7
10°	703.1
12.5°	693.2
15°	682.6
17.5°	670.2
20°	657.0
22.5°	641.4
25°	623.3
27.5°	602.8
30°	579.3
32.5°	552.7
35°	522.9
37.5°	491.3
40°	454.8
42.5°	409.5
45°	354.5
47.5°	288.2
50°	218.7
52.5°	154.1
55°	102.0
57.5°	64.1
60°	39.9
62.5°	25.4
65°	16.5
67.5°	9.4
70°	5.4
72.5°	3.3
75°	2.5
77.5°	1.7
80°	1.2
82.5°	0.4
85°	0.4
87.5°	0.0
90°	0.0

(END OF REPORT)