

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P244057

Luminaire Tested: **LSR8B15D010 EC8B15935 8LBSOLI**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P244057  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-12)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LSR8B15D010 EC8B15935 8LBS0LI  
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED  
DOWNLIGHT- CYLINDEC  
90 CRI 3500 CCT WITH SPECULAR CLEAR TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1472.0 lumens  
Efficiency: N/A  
Efficacy: 102.2 lumens/watt  
Spacing Criteria (0/90/45): 1.28 / 1.28 / 1.24  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 14.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P244057

CATALOG NUMBER: LSR8B15D010 EC8B15935 8LBSOLI

### Luminous Intensity Polar Plot

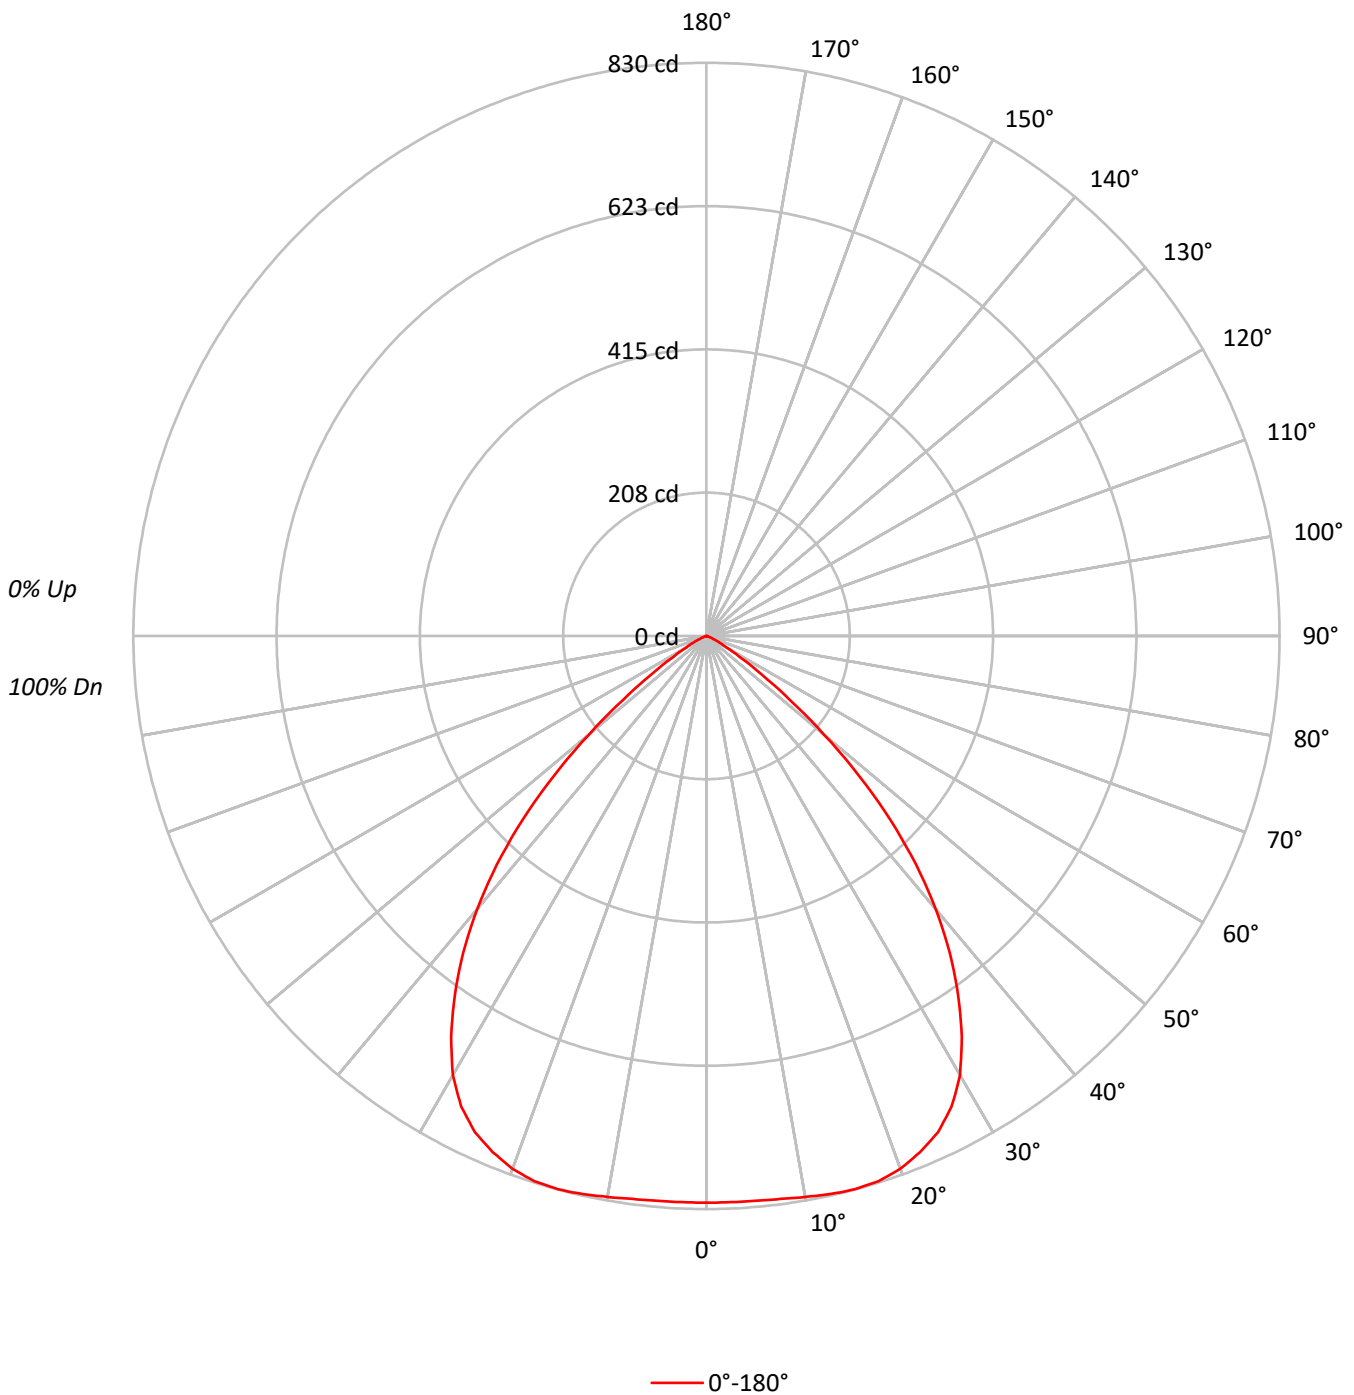



TEST NUMBER: P244057

CATALOG NUMBER: LSR8B15D010 EC8B15935 8LBSOLI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	104	110	107	104	102	103	101	99		99	97	96		96	94	93	91
2	105	99	95	91	103	98	93	90	94	91	88		91	88	86		88	86	84	82
3	98	91	85	80	96	89	84	79	86	82	78		84	80	77		82	78	75	74
4	92	83	76	71	90	82	75	71	79	74	70		77	73	69		75	71	68	66
5	86	76	69	63	84	75	68	63	73	67	63		71	66	62		69	65	61	60
6	80	70	62	57	79	69	62	57	67	61	56		66	60	56		64	59	56	54
7	75	64	57	52	74	63	56	52	62	56	51		61	55	51		59	54	51	49
8	71	59	52	47	69	58	52	47	57	51	47		56	51	46		55	50	46	45
9	66	55	48	43	65	54	48	43	53	47	43		52	47	43		51	46	42	41
10	62	51	44	39	61	50	44	39	50	43	39		49	43	39		48	43	39	37

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	25307
5°	25416
10°	25829
15°	26484
20°	26945
25°	26978
30°	26142
35°	23934
40°	20803
45°	16458
50°	10674
55°	5333
60°	2239
65°	985
70°	307
75°	155
80°	142
85°	142



TEST NUMBER: P244057

CATALOG NUMBER: LSR8B15D010 EC8B15935 8LBS0LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	78.5	5.3
10°-20°	234.4	15.9
20°-30°	363.2	24.7
30°-40°	394.4	26.8
40°-50°	286.6	19.5
50°-60°	97.4	6.6
60°-70°	15.5	1.1
70°-80°	1.7	0.1
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	676.1	45.9
0°-40°	1070.5	72.7
0°-60°	1454.5	98.8
0°-90°	1472.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1472.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	821	
5°	821	78
15°	830	234
25°	793	363
35°	636	394
45°	377	287
55°	99	97
65°	14	16
75°	1	2
85°	0	0
90°	0	



TEST NUMBER: P244057

CATALOG NUMBER: LSR8B15D010 EC8B15935 8LBS0LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	820.7
2.5°	820.7
5°	821.1
7.5°	822.4
10°	824.9
12.5°	827.9
15°	829.6
17.5°	827.9
20°	821.1
22.5°	808.9
25°	792.9
27.5°	768.8
30°	734.2
32.5°	688.2
35°	635.8
37.5°	578.8
40°	516.8
42.5°	449.6
45°	377.4
47.5°	299.7
50°	222.5
52.5°	152.4
55°	99.2
57.5°	60.4
60°	36.3
62.5°	22.4
65°	13.5
67.5°	7.6
70°	3.4
72.5°	2.1
75°	1.3
77.5°	0.8
80°	0.8
82.5°	0.4
85°	0.4
87.5°	0.0
90°	0.0

(END OF REPORT)