

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P244723

Luminaire Tested: **LSR8B15D010 EC8B159727 8LBW0WMH**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P244723
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-44)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B15D010 EC8B159727 8LBW0WMH
Description: PORTFOLIO 8 INCH WIDE DISTRIBUTION 60 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
97 CRI 2700 CCT WITH WARM HAZE TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1039.0 lumens
Efficiency: N/A
Efficacy: 72.2 lumens/watt
Spacing Criteria (0/90/45): 1.14 / 1.14 / 1.06
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P244723

CATALOG NUMBER: LSR8B15D010 EC8B159727 8LBW0WMH

Luminous Intensity Polar Plot

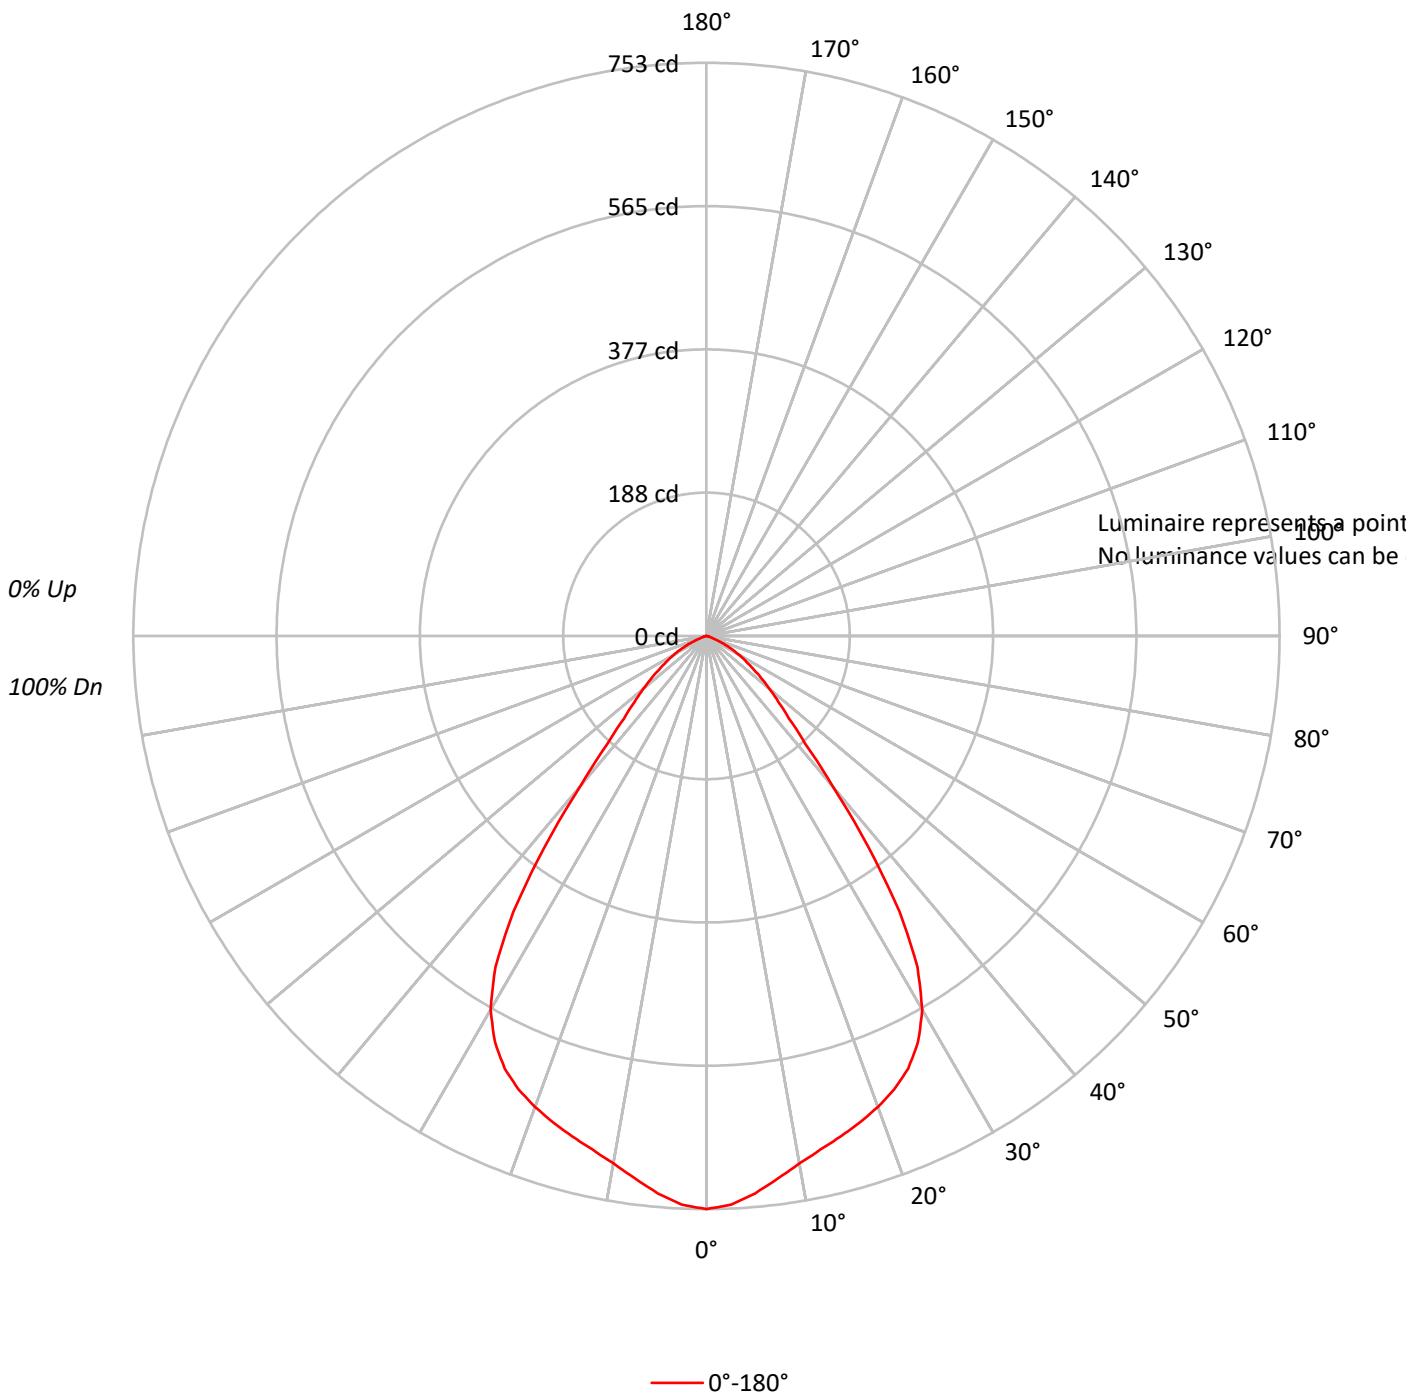



TEST NUMBER: P244723

CATALOG NUMBER: LSR8B15D010 EC8B159727 8LBW0WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	84	83
3	99	91	86	81	97	90	85	80	87	83	79	85	81	78	82	79	76	75
4	93	84	77	72	91	83	77	72	80	75	71	78	74	70	76	73	69	68
5	87	77	70	65	85	76	70	65	74	69	64	73	68	64	71	67	63	62
6	82	71	64	59	80	70	64	59	69	63	59	67	62	58	66	61	58	56
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	61	57	53	51
8	72	61	54	50	71	61	54	50	60	54	49	58	53	49	57	53	49	47
9	68	57	50	46	67	57	50	46	56	50	46	55	49	45	54	49	45	44
10	65	54	47	42	63	53	47	42	52	46	42	51	46	42	51	46	42	41

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P244723

CATALOG NUMBER: LSR8B15D010 EC8B159727 8LBW0WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	69.1	6.7
10°-20°	192.3	18.5
20°-30°	286.5	27.6
30°-40°	266.1	25.6
40°-50°	125.7	12.1
50°-60°	67.5	6.5
60°-70°	27.1	2.6
70°-80°	4.3	0.4
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	548.0	52.7
0°-40°	814.0	78.3
0°-60°	1007.2	96.9
0°-90°	1039.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1039.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	753	
5°	735	69
15°	681	192
25°	627	287
35°	442	266
45°	153	126
55°	74	68
65°	27	27
75°	4	4
85°	0	0
90°	0	



TEST NUMBER: P244723

CATALOG NUMBER: LSR8B15D010 EC8B159727 8LBW0WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	753.0
2.5°	747.8
5°	735.0
7.5°	718.8
10°	703.6
12.5°	691.2
15°	680.8
17.5°	670.1
20°	658.4
22.5°	644.9
25°	627.0
27.5°	601.8
30°	566.9
32.5°	515.8
35°	442.3
37.5°	348.3
40°	258.2
42.5°	192.3
45°	153.3
47.5°	128.1
50°	108.1
52.5°	90.1
55°	74.2
57.5°	60.4
60°	49.0
62.5°	38.3
65°	26.9
67.5°	15.9
70°	9.3
72.5°	5.5
75°	3.5
77.5°	2.1
80°	1.0
82.5°	0.7
85°	0.3
87.5°	0.0
90°	0.0

(END OF REPORT)