

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P245588

Luminaire Tested: **LSR8B20D010 EC8B209727 8LBW0GPH**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P245588
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-46)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B20D010 EC8B209727 8LBW0GPH
Description: PORTFOLIO 8 INCH WIDE DISTRIBUTION 60 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
97 CRI 2700 CCT WITH GRAPHITE TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1363.0 lumens
Efficiency: N/A
Efficacy: 64.0 lumens/watt
Spacing Criteria (0/90/45): 1.11 / 1.11 / 1.05
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 21.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P245588

CATALOG NUMBER: LSR8B20D010 EC8B209727 8LBW0GPH

Luminous Intensity Polar Plot

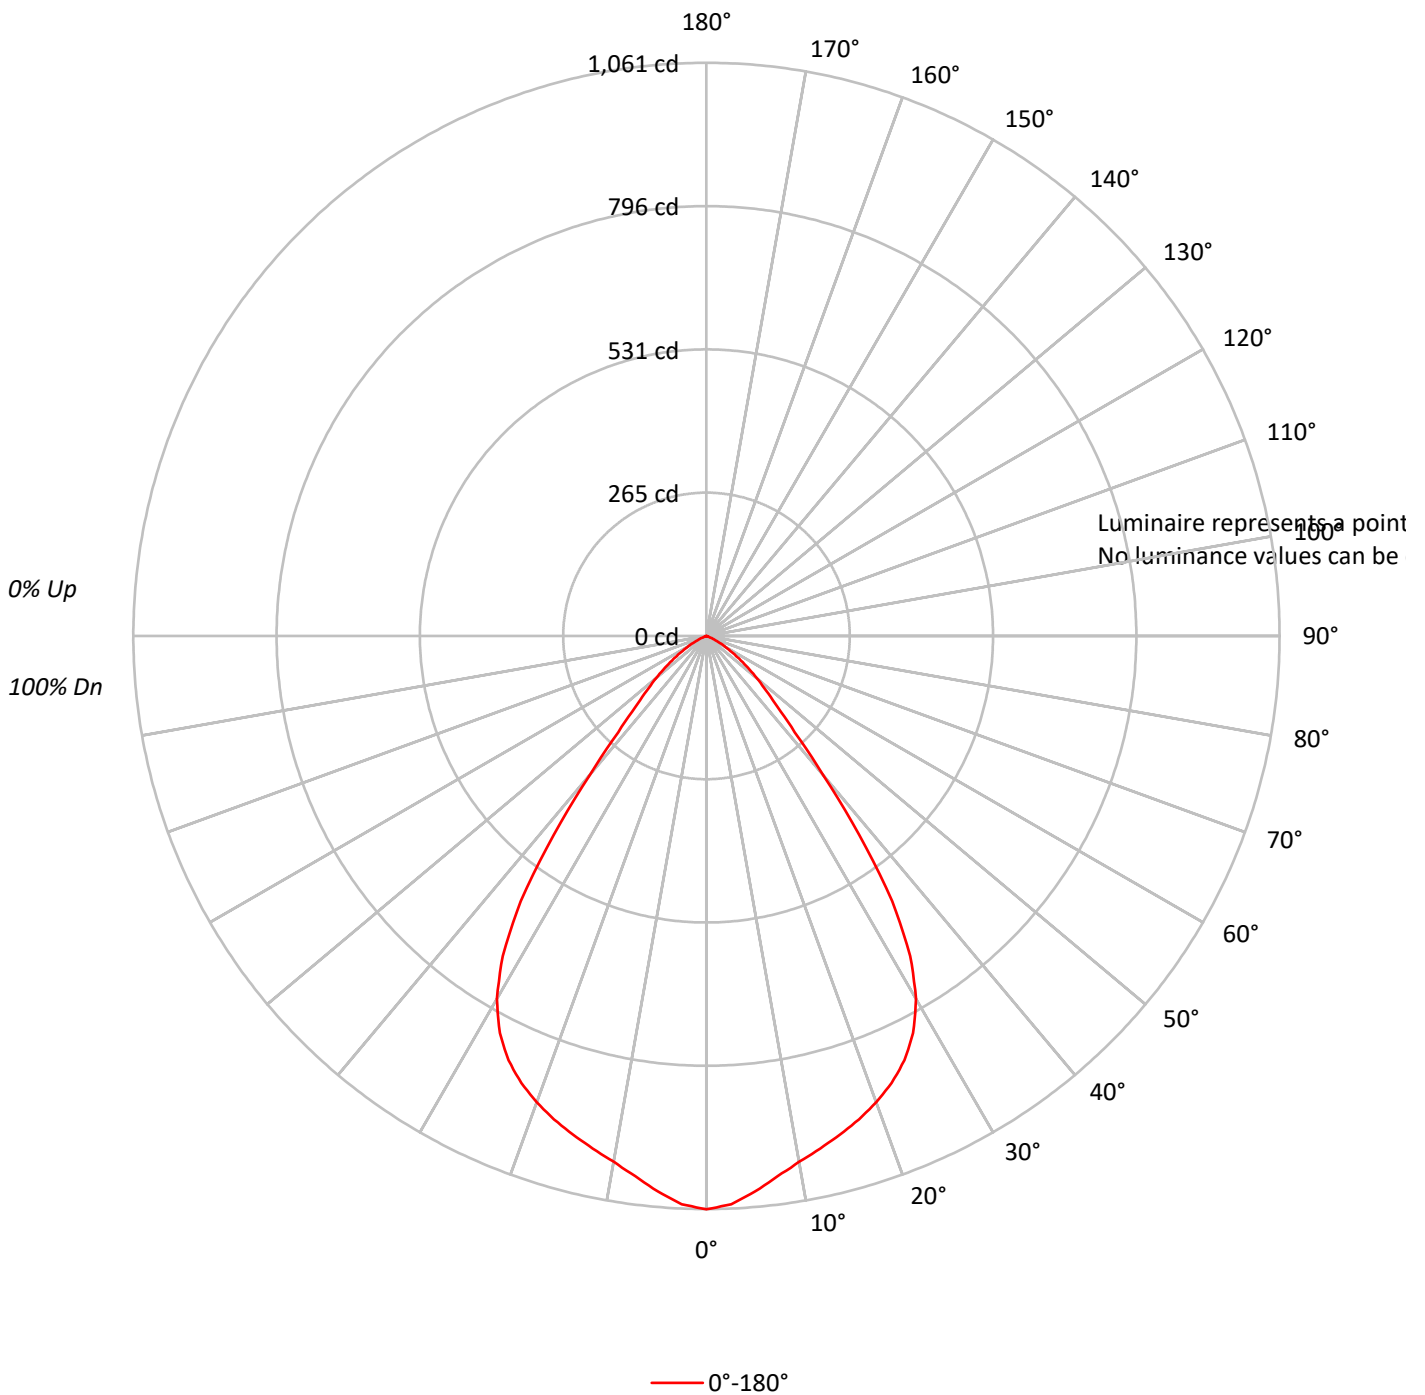



TEST NUMBER: P245588

CATALOG NUMBER: LSR8B20D010 EC8B209727 8LBW0GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	107	104	110	108	105	103	103	101	100	100	98	97	96	95	94	92
2	106	101	96	92	104	99	95	91	96	92	89	93	90	87	90	88	86	84
3	100	93	87	83	98	91	86	82	89	84	81	86	82	79	84	81	78	76
4	94	85	79	74	92	84	78	74	82	77	73	80	76	72	78	74	71	70
5	88	79	72	67	87	78	72	67	76	71	66	74	70	66	73	69	65	64
6	83	73	66	61	82	72	66	61	71	65	61	69	64	60	68	63	60	58
7	78	68	61	56	77	67	61	56	66	60	56	65	59	56	63	59	55	54
8	74	63	56	52	73	63	56	52	61	56	51	60	55	51	59	55	51	49
9	70	59	52	48	69	58	52	48	57	52	48	57	51	47	56	51	47	46
10	66	55	49	44	65	55	49	44	54	48	44	53	48	44	52	47	44	43

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P245588

CATALOG NUMBER: LSR8B20D010 EC8B209727 8LBW0GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	97.1	7.1
10°-20°	269.7	19.8
20°-30°	396.0	29.1
30°-40°	359.0	26.3
40°-50°	153.7	11.3
50°-60°	68.0	5.0
60°-70°	18.1	1.3
70°-80°	1.4	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	762.8	56.0
0°-40°	1121.7	82.3
0°-60°	1343.4	98.6
0°-90°	1363.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1363.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1061	
5°	1032	97
15°	956	270
25°	867	396
35°	599	359
45°	186	154
55°	74	68
65°	17	18
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P245588

CATALOG NUMBER: LSR8B20D010 EC8B209727 8LBW0GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1061.3
2.5°	1052.9
5°	1032.3
7.5°	1008.7
10°	988.5
12.5°	971.8
15°	955.5
17.5°	938.3
20°	918.6
22.5°	895.5
25°	867.0
27.5°	828.6
30°	775.9
32.5°	702.1
35°	599.3
37.5°	464.5
40°	334.6
42.5°	241.6
45°	185.5
47.5°	149.6
50°	121.5
52.5°	96.4
55°	73.8
57.5°	55.1
60°	40.3
62.5°	28.0
65°	16.7
67.5°	7.4
70°	3.4
72.5°	2.0
75°	1.0
77.5°	0.5
80°	0.5
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)