

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P243915

Luminaire Tested: **LSR8B30D010 EC8B30935 8LBN0LI**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P243915  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-10)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LSR8B30D010 EC8B30935 8LBNOLI  
Description: PORTFOLIO 8 INCH NARROW DISTRIBUTION 50 DEGREE CUTOFF RECESSED  
DOWNLIGHT- CYLINDEC  
90 CRI 3500 CCT WITH SPECULAR CLEAR TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2515.0 lumens  
Efficiency: N/A  
Efficacy: 92.8 lumens/watt  
Spacing Criteria (0/90/45): 0.25 / 0.25 / 0.32  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 27.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P243915

CATALOG NUMBER: LSR8B30D010 EC8B30935 8LBNOLI

### Luminous Intensity Polar Plot

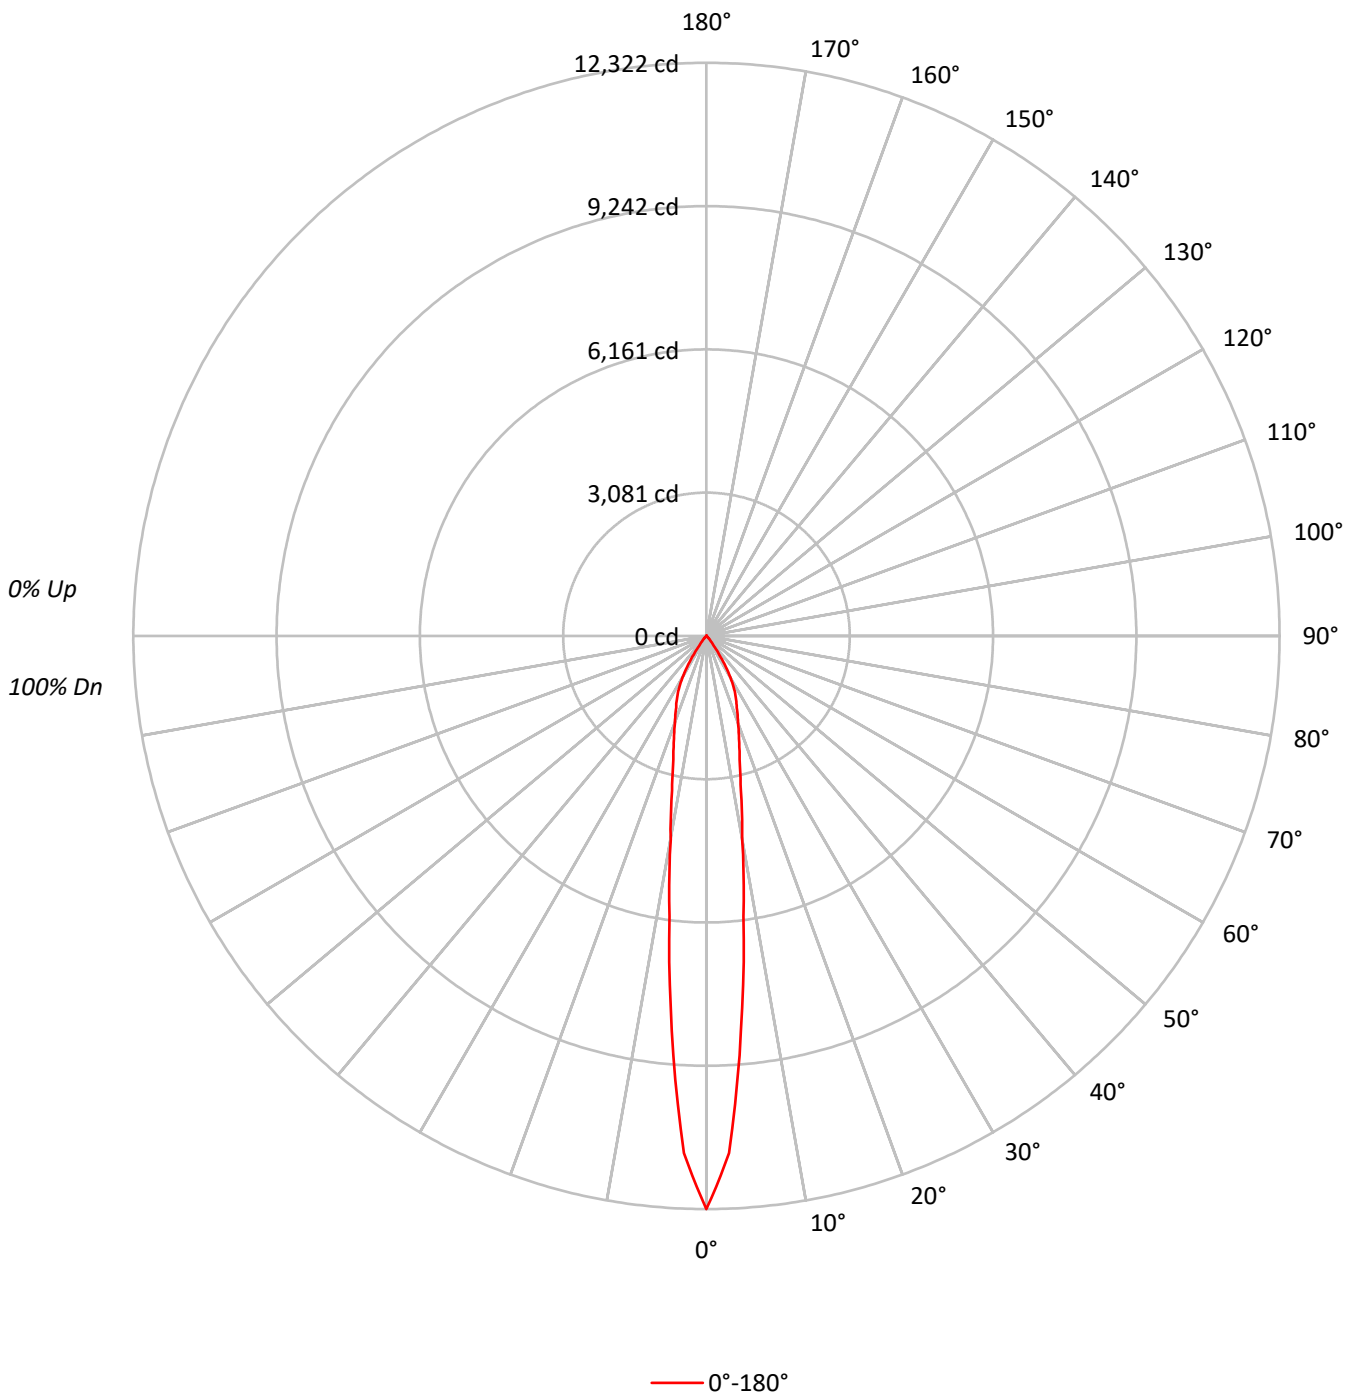



TEST NUMBER: P243915

CATALOG NUMBER: LSR8B30D010 EC8B30935 8LBNOLI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99	98	97	95
2	110	106	102	100	108	104	101	99	101	99	96		98	96	94		95	94	92	91
3	106	100	96	93	104	99	95	92	96	93	91		94	92	89		92	90	88	87
4	102	95	91	87	100	94	90	87	92	89	86		90	87	85		89	86	84	83
5	98	91	86	83	96	90	86	82	88	85	82		87	84	81		85	83	80	79
6	94	87	82	79	93	86	82	78	85	81	78		83	80	77		82	79	77	76
7	91	83	78	75	90	83	78	75	81	77	74		80	77	74		79	76	74	72
8	88	80	75	72	86	79	75	71	78	74	71		77	74	71		76	73	71	70
9	85	77	72	69	84	76	72	69	75	71	68		75	71	68		74	70	68	67
10	82	74	69	66	81	73	69	66	73	69	66		72	68	66		71	68	65	64

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	379959
5°	263902
10°	138872
15°	87865
20°	65296
25°	51336
30°	36960
35°	15859
40°	5527
45°	2119
50°	489
55°	183
60°	0
65°	248
70°	81
75°	203
80°	302
85°	0



TEST NUMBER: P243915

CATALOG NUMBER: LSR8B30D010 EC8B30935 8LBNOLI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	683.5	27.2
10°-20°	794.1	31.6
20°-30°	685.4	27.3
30°-40°	297.4	11.8
40°-50°	46.6	1.9
50°-60°	3.4	0.1
60°-70°	1.8	0.1
70°-80°	1.9	0.1
80°-90°	0.9	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2163.0	86.0
0°-40°	2460.4	97.8
0°-60°	2510.3	99.8
0°-90°	2515.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2515.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	12322	
5°	8526	683
15°	2752	794
25°	1509	685
35°	421	297
45°	49	47
55°	3	3
65°	3	2
75°	2	2
85°	0	1
90°	0	



TEST NUMBER: P243915

CATALOG NUMBER: LSR8B30D010 EC8B30935 8LBNOLI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	12321.8
2.5°	11126.9
5°	8525.6
7.5°	6080.3
10°	4435.1
12.5°	3403.1
15°	2752.3
17.5°	2314.8
20°	1989.8
22.5°	1712.6
25°	1508.8
27.5°	1293.8
30°	1038.0
32.5°	721.6
35°	421.3
37.5°	235.4
40°	137.3
42.5°	85.3
45°	48.6
47.5°	39.2
50°	10.2
52.5°	5.1
55°	3.4
57.5°	1.7
60°	0.0
62.5°	0.9
65°	3.4
67.5°	2.6
70°	0.9
72.5°	4.3
75°	1.7
77.5°	0.0
80°	1.7
82.5°	0.9
85°	0.0
87.5°	1.7
90°	0.0

(END OF REPORT)