

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P246531

Luminaire Tested: **LSR8B30D010 EC8B309730 8LBS0B**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P246531  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-17)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LSR8B30D010 EC8B309730 8LBS0B  
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED  
DOWNLIGHT- CYLINDEC  
97 CRI 3000 CCT WITH SPECULAR BLACK TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2077.0 lumens  
Efficiency: N/A  
Efficacy: 76.6 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.25  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 27.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P246531

CATALOG NUMBER: LSR8B30D010 EC8B309730 8LBS0B

### Luminous Intensity Polar Plot

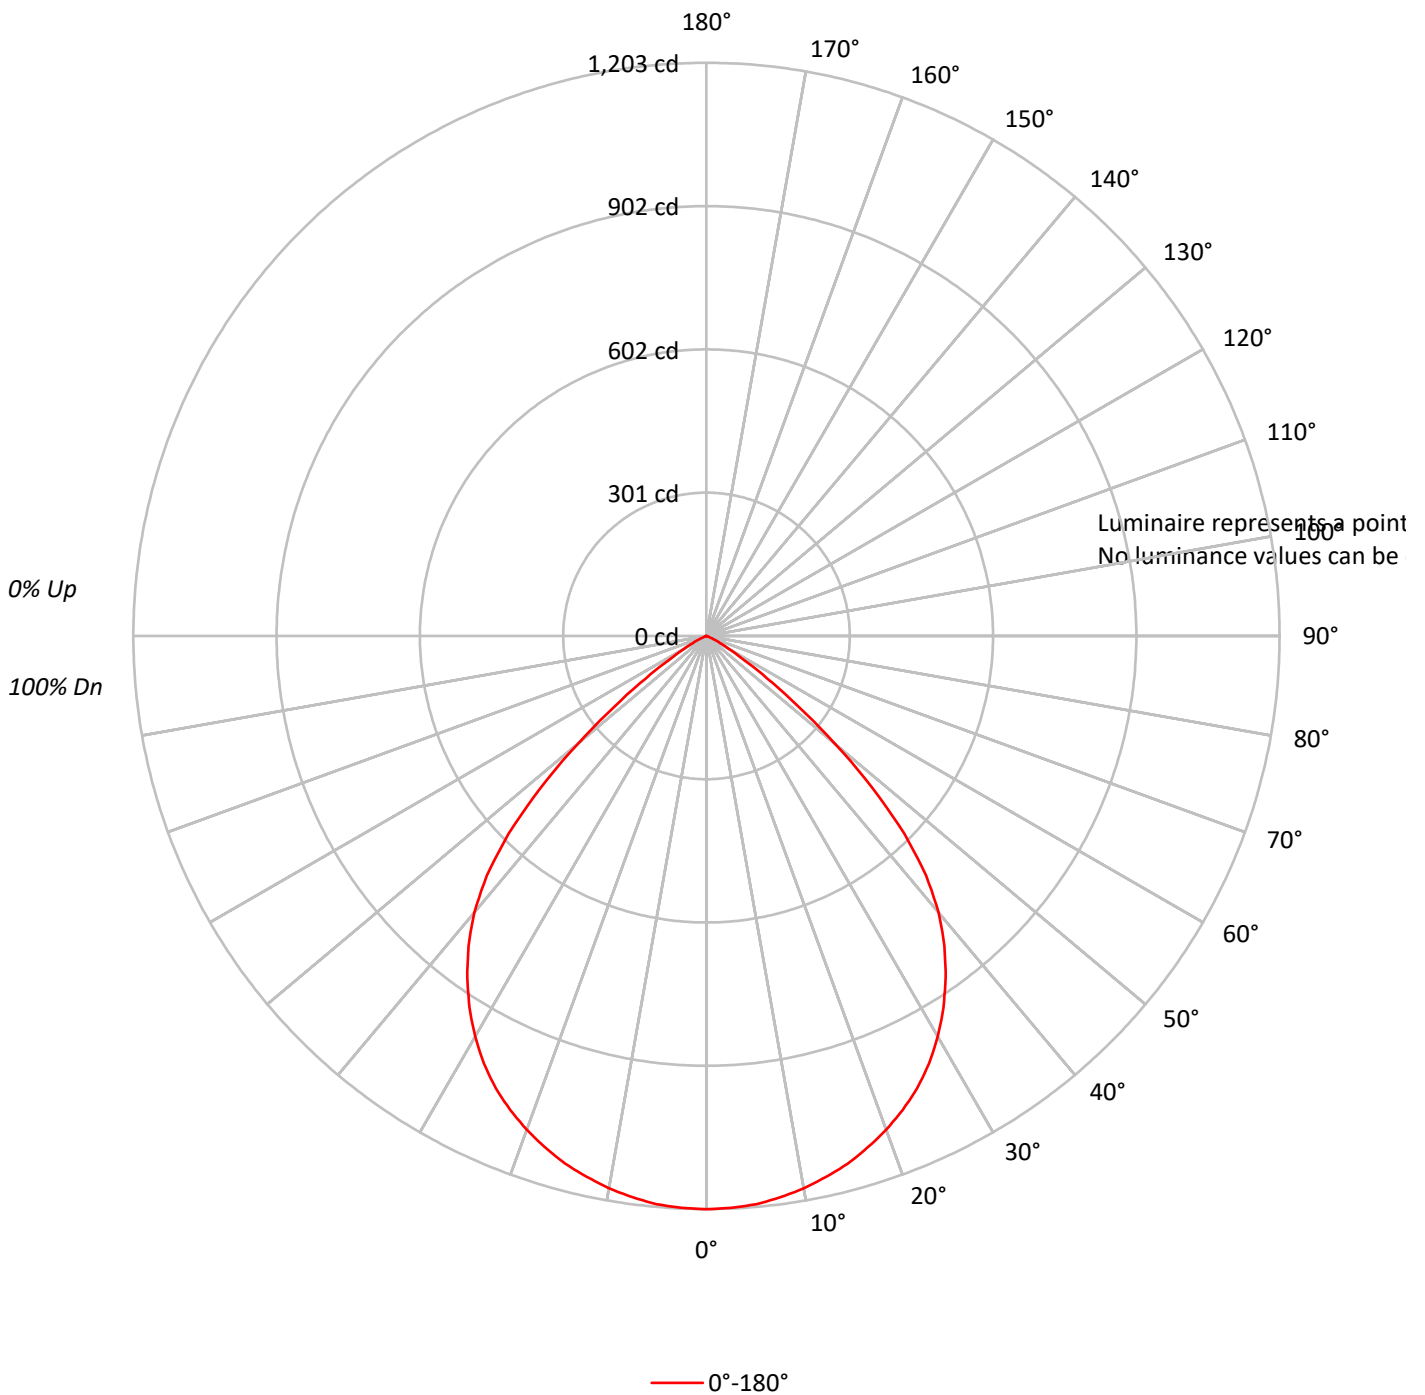



TEST NUMBER: P246531

CATALOG NUMBER: LSR8B30D010 EC8B309730 8LBS0B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	96	94	93	91
2	105	99	94	90	103	98	93	89	94	90	87	91	88	85	88	86	84	82
3	98	90	84	79	96	89	83	79	86	81	77	84	80	76	81	78	75	73
4	92	82	76	70	90	81	75	70	79	73	69	77	72	68	75	71	67	66
5	86	75	68	63	84	74	68	63	72	66	62	71	65	61	69	64	61	59
6	80	69	62	56	78	68	61	56	67	60	56	65	60	55	64	59	55	53
7	75	63	56	51	73	63	56	51	61	55	51	60	54	50	59	54	50	48
8	70	59	51	46	69	58	51	46	57	50	46	56	50	46	54	49	46	44
9	66	54	47	42	65	54	47	42	53	46	42	52	46	42	51	45	42	40
10	62	50	43	39	61	50	43	39	49	43	39	48	42	38	47	42	38	37

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P246531

CATALOG NUMBER: LSR8B30D010 EC8B309730 8LBS0B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	113.6	5.5
10°-20°	323.2	15.6
20°-30°	481.0	23.2
30°-40°	544.8	26.2
40°-50°	440.5	21.2
50°-60°	152.8	7.4
60°-70°	20.9	1.0
70°-80°	0.3	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	917.8	44.2
0°-40°	1462.6	70.4
0°-60°	2055.8	99.0
0°-90°	2077.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2077.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1203	
5°	1197	114
15°	1146	323
25°	1047	481
35°	875	545
45°	587	440
55°	156	153
65°	18	21
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P246531

CATALOG NUMBER: LSR8B30D010 EC8B309730 8LBS0B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1203.2
2.5°	1201.7
5°	1197.3
7.5°	1188.5
10°	1177.4
12.5°	1162.7
15°	1146.5
17.5°	1125.8
20°	1103.0
22.5°	1076.5
25°	1047.0
27.5°	1011.6
30°	971.1
32.5°	925.4
35°	875.3
37.5°	820.1
40°	758.2
42.5°	682.3
45°	587.2
47.5°	472.3
50°	352.9
52.5°	241.7
55°	155.5
57.5°	92.1
60°	53.8
62.5°	31.7
65°	17.7
67.5°	8.1
70°	2.2
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)