

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P244378

Luminaire Tested: **LSR8B40D010 EC8B40827 8LBM0H**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P244378
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P27951)
Test Lab: INNOVATION CENTER-P2
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B40D010 EC8B40827 8LBM0H
Description: PORTFOLIO 8 INCH MEDIUM DISTRIBUTION 55 DEG CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
80 CRI 2700 CCT WITH SEMI-SPECULAR CLEAR TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4069.0 lumens
Efficiency: N/A
Efficacy: 99.5 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.93
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 40.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P244378

CATALOG NUMBER: LSR8B40D010 EC8B40827 8LBM0H

Luminous Intensity Polar Plot

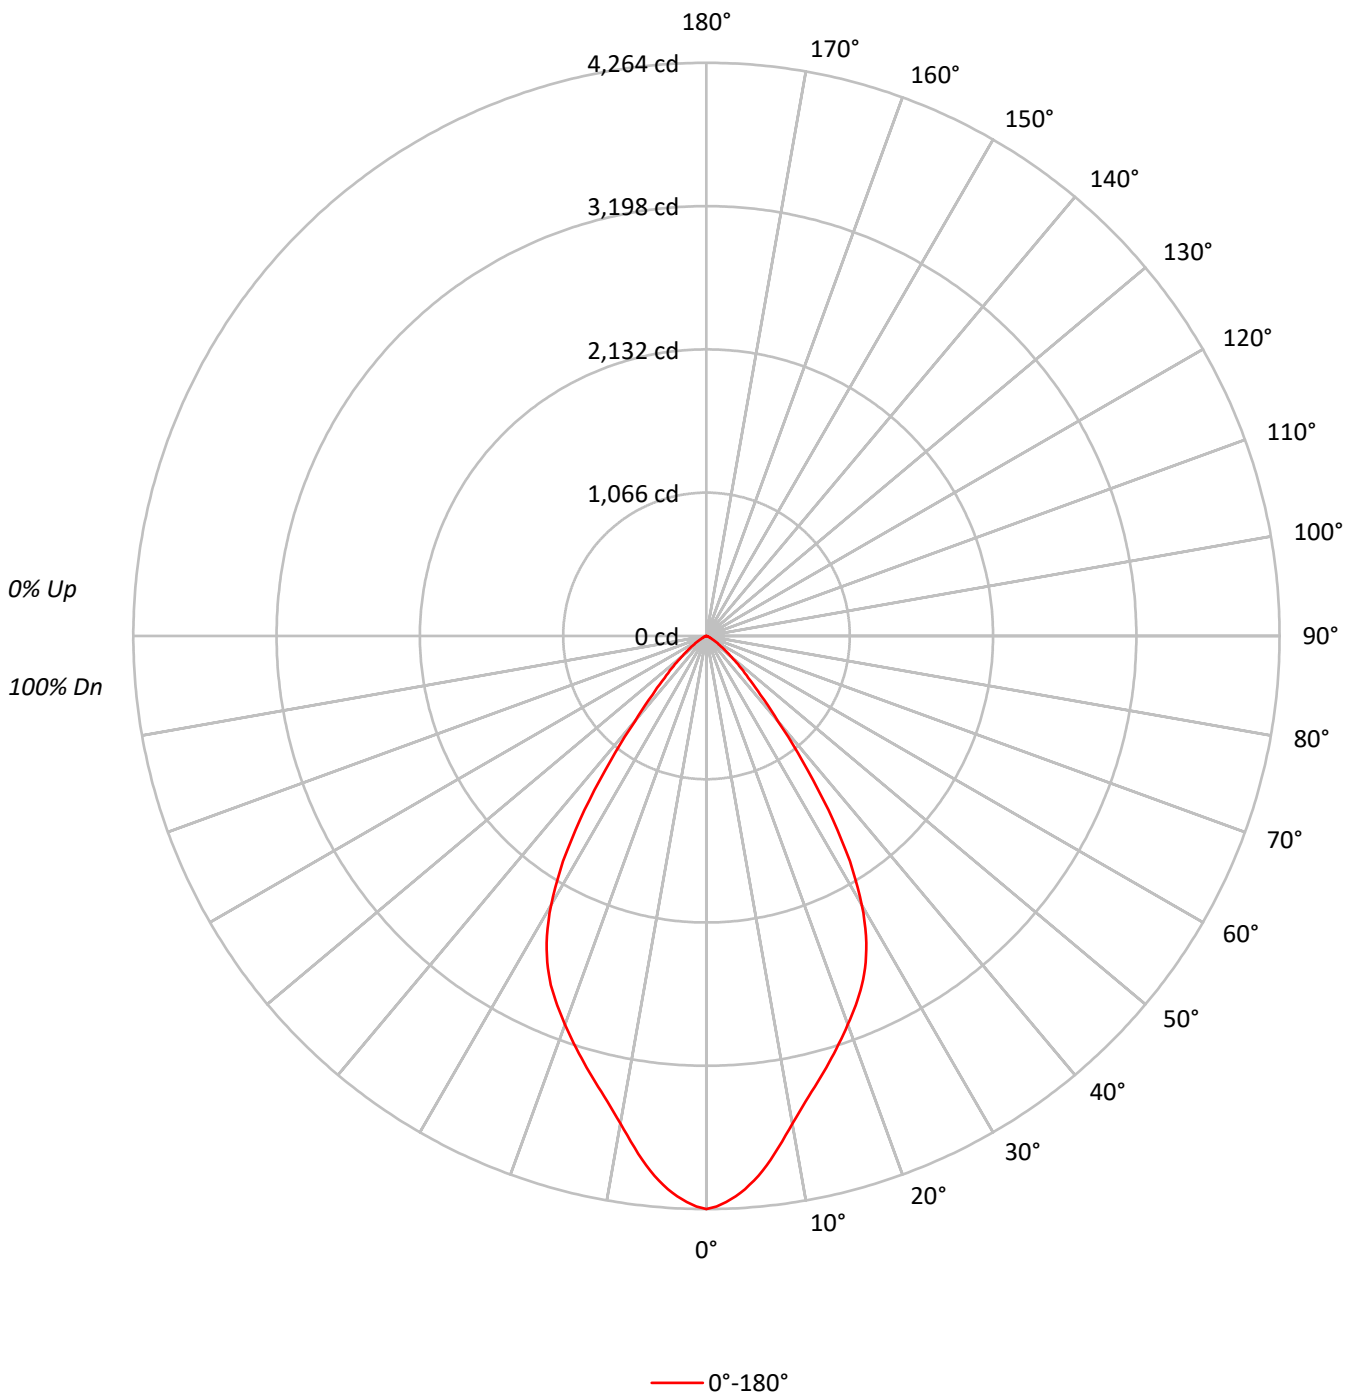



TEST NUMBER: P244378

CATALOG NUMBER: LSR8B40D010 EC8B40827 8LBM0H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100	100	100	100		
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93	93	93	93	93	93	93		
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85	85	85	85	85	85	85		
3	101	94	89	85	99	93	88	84	90	86	83	88	84	82	86	83	80	79	79	79	79	79	79	79		
4	96	88	82	77	94	86	81	77	84	80	76	82	78	75	80	77	74	73	73	73	73	73	73	73		
5	90	82	75	71	89	81	75	70	79	74	70	77	73	69	75	72	69	67	67	67	67	67	67	67		
6	85	76	70	65	84	75	69	65	74	68	64	72	68	64	71	67	64	62	62	62	62	62	62	62		
7	81	71	65	60	80	70	64	60	69	64	60	68	63	59	67	62	59	58	58	58	58	58	58	58		
8	77	67	60	56	75	66	60	56	65	59	56	64	59	55	63	58	55	54	54	54	54	54	54	54		
9	73	63	56	52	72	62	56	52	61	56	52	60	55	52	59	55	51	50	50	50	50	50	50	50		
10	69	59	53	49	68	58	53	49	58	52	48	57	52	48	56	51	48	47	47	47	47	47	47	47		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	131480
5°	125903
10°	115366
15°	107348
20°	100966
25°	94465
30°	82383
35°	59542
40°	33379
45°	19205
50°	11753
55°	6688
60°	3478
65°	1773
70°	965
75°	584
80°	337
85°	354



TEST NUMBER: P244378

CATALOG NUMBER: LSR8B40D010 EC8B40827 8LBM0H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	375.5	9.2
10°-20°	945.3	23.2
20°-30°	1261.3	31.0
30°-40°	972.2	23.9
40°-50°	362.5	8.9
50°-60°	118.5	2.9
60°-70°	27.3	0.7
70°-80°	5.5	0.1
80°-90°	0.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2582.1	63.5
0°-40°	3554.3	87.4
0°-60°	4035.4	99.2
0°-90°	4069.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4069.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4264	
5°	4067	376
15°	3363	945
25°	2776	1261
35°	1582	972
45°	440	363
55°	124	119
65°	24	27
75°	5	5
85°	1	1
90°	0	



TEST NUMBER: P244378

CATALOG NUMBER: LSR8B40D010 EC8B40827 8LBM0H

CANDELA DISTRIBUTION (FULL):

0°	
0°	4263.8
1°	4245.3
2°	4214.2
3°	4174.3
4°	4125.7
5°	4067.4
6°	4001.3
7°	3925.5
8°	3844.8
9°	3761.2
10°	3684.4
11°	3610.5
12°	3541.5
13°	3478.3
14°	3420.0
15°	3362.6
16°	3304.3
17°	3247.9
18°	3189.6
19°	3132.2
20°	3076.8
21°	3019.4
22°	2964.0
23°	2905.7
24°	2844.5
25°	2776.4
26°	2701.6
27°	2618.9
28°	2527.5
29°	2425.5
30°	2313.7
32.5°	1986.1
35°	1581.7
37.5°	1171.4
40°	829.2
42.5°	594.0
45°	440.4
47.5°	331.5
50°	245.0
52.5°	175.0
55°	124.4
57.5°	85.5
60°	56.4
62.5°	36.9
65°	24.3



TEST NUMBER: P244378

CATALOG NUMBER: LSR8B40D010 EC8B40827 8LBM0H

CANDELA DISTRIBUTION (continued):

	0°
67.5°	16.5
70°	10.7
72.5°	6.8
75°	4.9
77.5°	2.9
80°	1.9
82.5°	1.0
85°	1.0
87.5°	0.0
90°	0.0

(END OF REPORT)