

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P244882

Luminaire Tested: **LSR8B40D010 EC8B40827 8LBS0WMH**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P244882
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-14)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B40D010 EC8B40827 8LBS0WMH
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
80 CRI 2700 CCT WITH WARM HAZE TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4436.9 lumens
Efficiency: N/A
Efficacy: 108.5 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.25
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 40.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P244882

CATALOG NUMBER: LSR8B40D010 EC8B40827 8LBS0WMH

Luminous Intensity Polar Plot

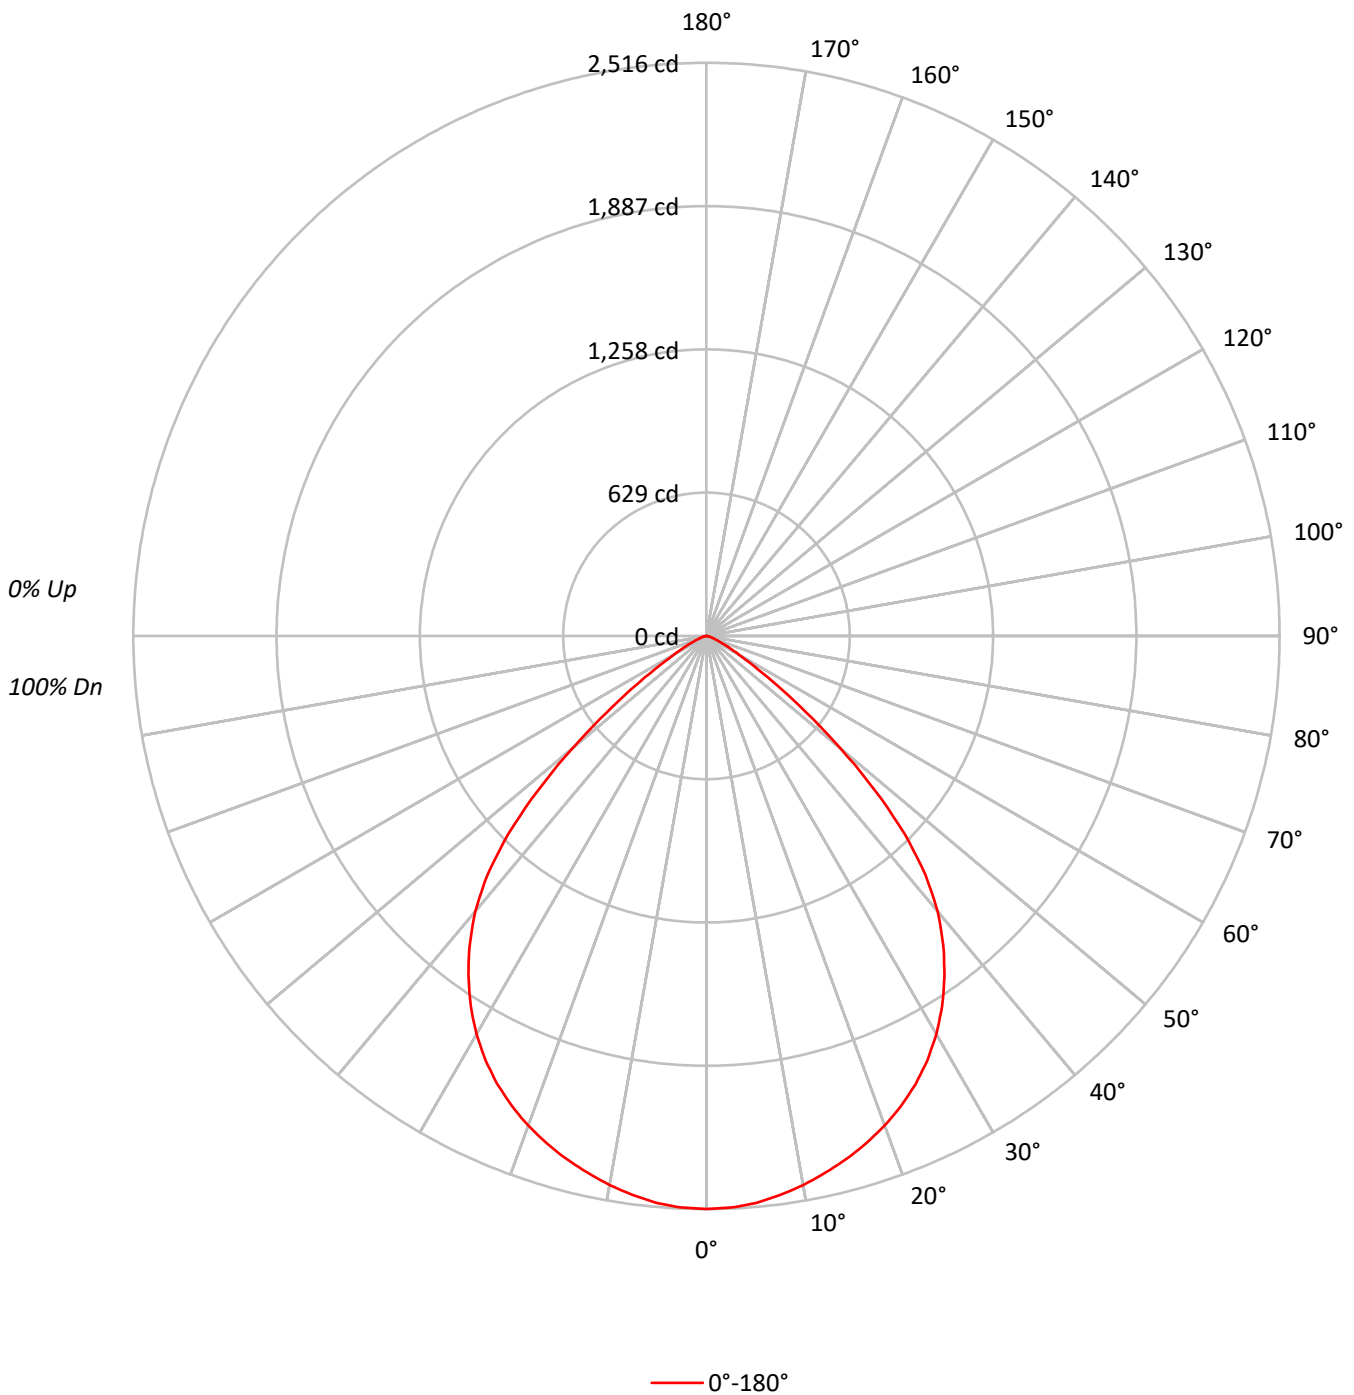



TEST NUMBER: P244882

CATALOG NUMBER: LSR8B40D010 EC8B40827 8LBS0W/MH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	103	110	107	104	101	102	100	98		99	97	95		95	94	92	91
2	105	99	94	89	102	97	92	88	94	90	86		90	87	85		88	85	83	81
3	98	90	83	78	95	88	82	78	85	80	76		83	79	75		80	77	74	72
4	91	82	75	69	89	80	74	69	78	72	68		76	71	67		74	70	66	65
5	85	74	67	62	83	73	67	61	71	65	61		70	64	60		68	63	60	58
6	79	68	61	55	77	67	60	55	66	59	55		64	58	54		63	58	54	52
7	74	63	55	50	72	62	55	50	60	54	49		59	53	49		58	53	49	47
8	69	58	50	45	68	57	50	45	56	49	45		55	49	45		54	48	45	43
9	65	53	46	41	64	53	46	41	52	45	41		51	45	41		50	45	41	39
10	61	50	43	38	60	49	42	38	48	42	38		47	42	38		46	41	37	36

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	77575
5°	77336
10°	76639
15°	75880
20°	75065
25°	73880
30°	71851
35°	68576
40°	63553
45°	53661
50°	36814
55°	20306
60°	10207
65°	5742
70°	3129
75°	2228
80°	1421
85°	955



TEST NUMBER: P244882

CATALOG NUMBER: LSR8B40D010 EC8B40827 8LBS0WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	236.8	5.3
10°-20°	670.3	15.1
20°-30°	998.0	22.5
30°-40°	1133.7	25.6
40°-50°	926.7	20.9
50°-60°	363.1	8.2
60°-70°	84.6	1.9
70°-80°	20.4	0.5
80°-90°	3.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1905.2	42.9
0°-40°	3038.9	68.5
0°-60°	4328.7	97.6
0°-90°	4436.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4436.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2516	
5°	2498	237
15°	2377	670
25°	2171	998
35°	1822	1134
45°	1230	927
55°	378	363
65°	79	85
75°	19	20
85°	3	3
90°	0	



TEST NUMBER: P244882

CATALOG NUMBER: LSR8B40D010 EC8B40827 8LBS0WMH

CANDELA DISTRIBUTION (FULL):

	0°
0°	2515.7
2.5°	2511.7
5°	2498.4
7.5°	2475.7
10°	2447.6
12.5°	2412.9
15°	2376.9
17.5°	2334.2
20°	2287.5
22.5°	2232.8
25°	2171.4
27.5°	2099.3
30°	2017.9
32.5°	1925.8
35°	1821.7
37.5°	1706.9
40°	1578.8
42.5°	1424.0
45°	1230.5
47.5°	1003.6
50°	767.4
52.5°	551.2
55°	377.7
57.5°	246.9
60°	165.5
62.5°	113.4
65°	78.7
67.5°	52.0
70°	34.7
72.5°	24.0
75°	18.7
77.5°	13.3
80°	8.0
82.5°	4.0
85°	2.7
87.5°	1.3
90°	0.0

(END OF REPORT)