

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P246694

Luminaire Tested: **LSR8B40D010 EC8B40835 8LBM0MW**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P246694
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P201674)
Test Lab: INNOVATION CENTER-P1
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B40D010 EC8B40835 8LBM0MW
Description: PORTFOLIO 8 INCH MEDIUM DISTRIBUTION 55 DEG CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
80 CRI 3500 CCT WITH MATTE WHITE TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4410.0 lumens
Efficiency: N/A
Efficacy: 107.8 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.93
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 40.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P246694

CATALOG NUMBER: LSR8B40D010 EC8B40835 8LBM0MW

Luminous Intensity Polar Plot

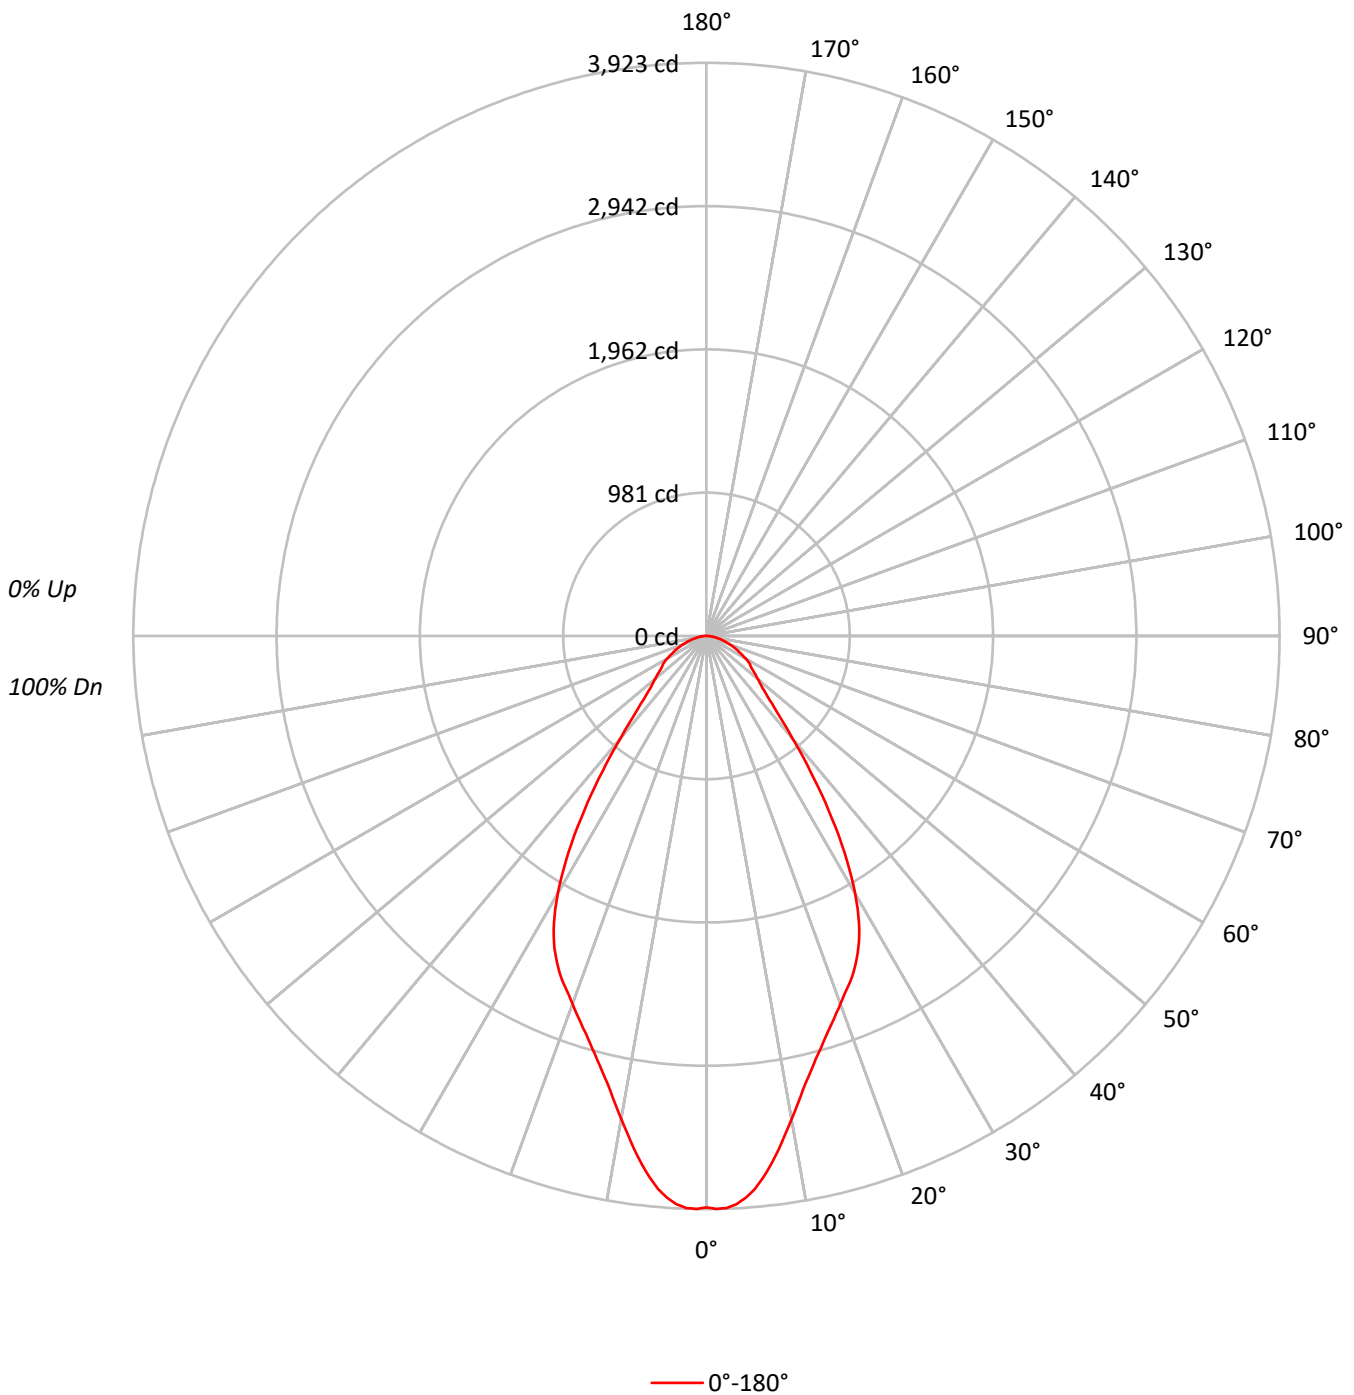



TEST NUMBER: P246694

CATALOG NUMBER: LSR8B40D010 EC8B40835 8LBM0MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	91	89					89			
2	104	98	93	88	102	96	91	87	93	89	85	90	86	83	87	84	82	80					80			
3	97	89	83	78	95	88	82	77	85	80	76	82	78	75	80	76	73	71					71			
4	91	82	75	69	89	80	74	69	78	72	68	76	71	67	74	70	66	65					65			
5	85	75	68	63	83	74	67	62	72	66	62	70	65	61	69	64	60	59					59			
6	80	69	62	57	78	68	62	57	67	61	56	65	60	56	64	59	55	54					54			
7	75	64	57	52	74	64	57	52	62	56	52	61	55	51	60	55	51	49					49			
8	71	60	53	48	70	59	53	48	58	52	48	57	51	47	56	51	47	46					46			
9	67	56	49	44	66	56	49	44	54	48	44	54	48	44	53	48	44	42					42			
10	64	53	46	41	63	52	46	41	51	45	41	50	45	41	50	45	41	39					39			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	120635
5°	117576
10°	105111
15°	94454
20°	87961
25°	82869
30°	72453
35°	54900
40°	36873
45°	25991
50°	22039
55°	20096
60°	19045
65°	17132
70°	15417
75°	13856
80°	12200
85°	11746



TEST NUMBER: P246694

CATALOG NUMBER: LSR8B40D010 EC8B40835 8LBM0MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	347.7	7.9
10°-20°	834.4	18.9
20°-30°	1105.7	25.1
30°-40°	906.7	20.6
40°-50°	483.0	11.0
50°-60°	339.9	7.7
60°-70°	234.4	5.3
70°-80°	122.0	2.8
80°-90°	36.1	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2287.8	51.9
0°-40°	3194.5	72.4
0°-60°	4017.4	91.1
0°-90°	4410.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4410.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3912	
5°	3798	348
15°	2959	834
25°	2436	1106
35°	1458	907
45°	596	483
55°	374	340
65°	235	234
75°	116	122
85°	33	36
90°	0	



TEST NUMBER: P246694

CATALOG NUMBER: LSR8B40D010 EC8B40835 8LBM0MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	3912.1
1°	3923.1
2°	3918.4
3°	3895.2
4°	3855.5
5°	3798.4
6°	3727.0
7°	3641.3
8°	3549.3
9°	3451.4
10°	3356.9
11°	3266.4
12°	3174.4
13°	3097.8
14°	3025.1
15°	2958.7
16°	2896.2
17°	2838.6
18°	2785.2
19°	2731.7
20°	2680.5
21°	2630.7
22°	2587.3
23°	2542.8
24°	2490.6
25°	2435.6
26°	2373.2
27°	2302.9
28°	2223.6
29°	2135.8
30°	2034.8
31°	1929.1
32°	1818.0
33°	1699.5
34°	1580.5
35°	1458.4
37.5°	1168.6
40°	916.0
42.5°	723.4
45°	596.0
47.5°	511.8
50°	459.4
52.5°	413.5
55°	373.8
57.5°	349.6



TEST NUMBER: P246694

CATALOG NUMBER: LSR8B40D010 EC8B40835 8LBM0MW

CANDELA DISTRIBUTION (continued):

	0°
60°	308.8
62.5°	269.2
65°	234.8
67.5°	204.2
70°	171.0
72.5°	142.7
75°	116.3
77.5°	84.2
80°	68.7
82.5°	49.7
85°	33.2
87.5°	15.4
90°	0.0

(END OF REPORT)