

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P245590

Luminaire Tested: **LSR8B40D010 EC8B40927 8LBW0GPH**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P245590  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-46)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LSR8B40D010 EC8B40927 8LBW0GPH  
Description: PORTFOLIO 8 INCH WIDE DISTRIBUTION 60 DEGREE CUTOFF RECESSED  
DOWNLIGHT- CYLINDEC  
97 CRI 2700 CCT WITH GRAPHITE TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3087.1 lumens  
Efficiency: N/A  
Efficacy: 75.5 lumens/watt  
Spacing Criteria (0/90/45): 1.11 / 1.11 / 1.05  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 40.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P245590

CATALOG NUMBER: LSR8B40D010 EC8B40927 8LBW0GPH

### Luminous Intensity Polar Plot

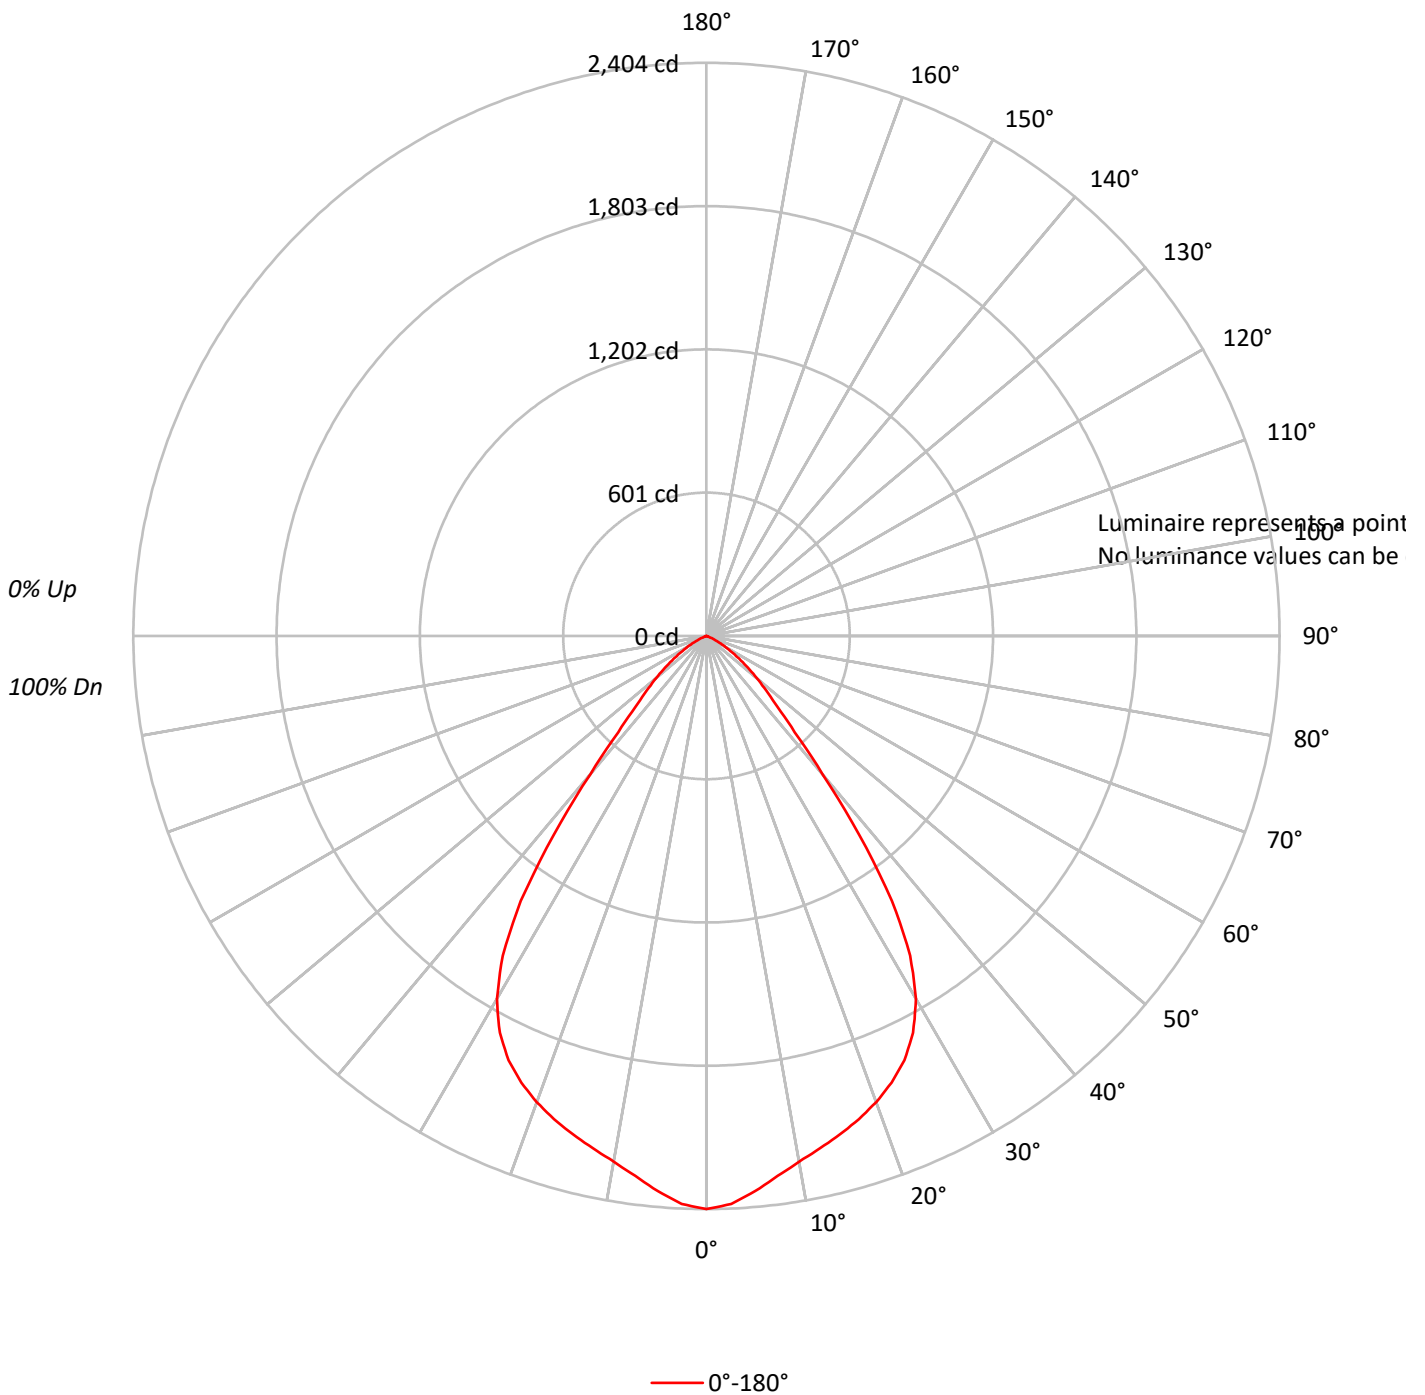



TEST NUMBER: P245590

CATALOG NUMBER: LSR8B40D010 EC8B40927 8LBW0GPH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	110	107	104	110	108	105	103	103	101	100		100	98	97		96	95	94	92
2	106	101	96	92	104	99	95	91	96	92	89		93	90	87		90	88	86	84
3	100	93	87	83	98	91	86	82	89	84	81		86	82	79		84	81	78	76
4	94	85	79	74	92	84	78	74	82	77	73		80	76	72		78	74	71	70
5	88	79	72	67	87	78	72	67	76	71	66		74	70	66		73	69	65	64
6	83	73	66	61	82	72	66	61	71	65	61		69	64	60		68	63	60	58
7	78	68	61	56	77	67	61	56	66	60	56		65	59	56		63	59	55	54
8	74	63	56	52	73	63	56	52	61	56	51		60	55	51		59	55	51	49
9	70	59	52	48	69	58	52	48	57	52	48		57	51	47		56	51	47	46
10	66	55	49	44	65	55	49	44	54	48	44		53	48	44		52	47	44	43

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P245590

CATALOG NUMBER: LSR8B40D010 EC8B40927 8LBW0GPH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	219.9	7.1
10°-20°	610.7	19.8
20°-30°	896.9	29.1
30°-40°	813.0	26.3
40°-50°	348.0	11.3
50°-60°	154.0	5.0
60°-70°	41.1	1.3
70°-80°	3.2	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1727.5	56.0
0°-40°	2540.6	82.3
0°-60°	3042.6	98.6
0°-90°	3087.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3087.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2404	
5°	2338	220
15°	2164	611
25°	1964	897
35°	1357	813
45°	420	348
55°	167	154
65°	38	41
75°	2	3
85°	0	0
90°	0	



TEST NUMBER: P245590

CATALOG NUMBER: LSR8B40D010 EC8B40927 8LBW0GPH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2403.7
2.5°	2384.8
5°	2338.0
7.5°	2284.4
10°	2238.8
12.5°	2200.8
15°	2164.2
17.5°	2125.1
20°	2080.6
22.5°	2028.2
25°	1963.6
27.5°	1876.6
30°	1757.4
32.5°	1590.2
35°	1357.3
37.5°	1052.0
40°	757.8
42.5°	547.2
45°	420.1
47.5°	338.7
50°	275.3
52.5°	218.4
55°	167.2
57.5°	124.8
60°	91.4
62.5°	63.6
65°	37.9
67.5°	16.8
70°	7.8
72.5°	4.5
75°	2.2
77.5°	1.1
80°	1.1
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)