

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P246604

Luminaire Tested: **LSR8B40D010 EC8B409730 8LBW0MW**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P246604
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-48)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B40D010 EC8B409730 8LBW0MW
Description: PORTFOLIO 8 INCH WIDE DISTRIBUTION 60 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
97 CRI 3000 CCT WITH MATTE WHITE TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3304.0 lumens
Efficiency: N/A
Efficacy: 80.8 lumens/watt
Spacing Criteria (0/90/45): 1.11 / 1.11 / 1.05
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 40.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P246604

CATALOG NUMBER: LSR8B40D010 EC8B409730 8LBW0MW

Luminous Intensity Polar Plot

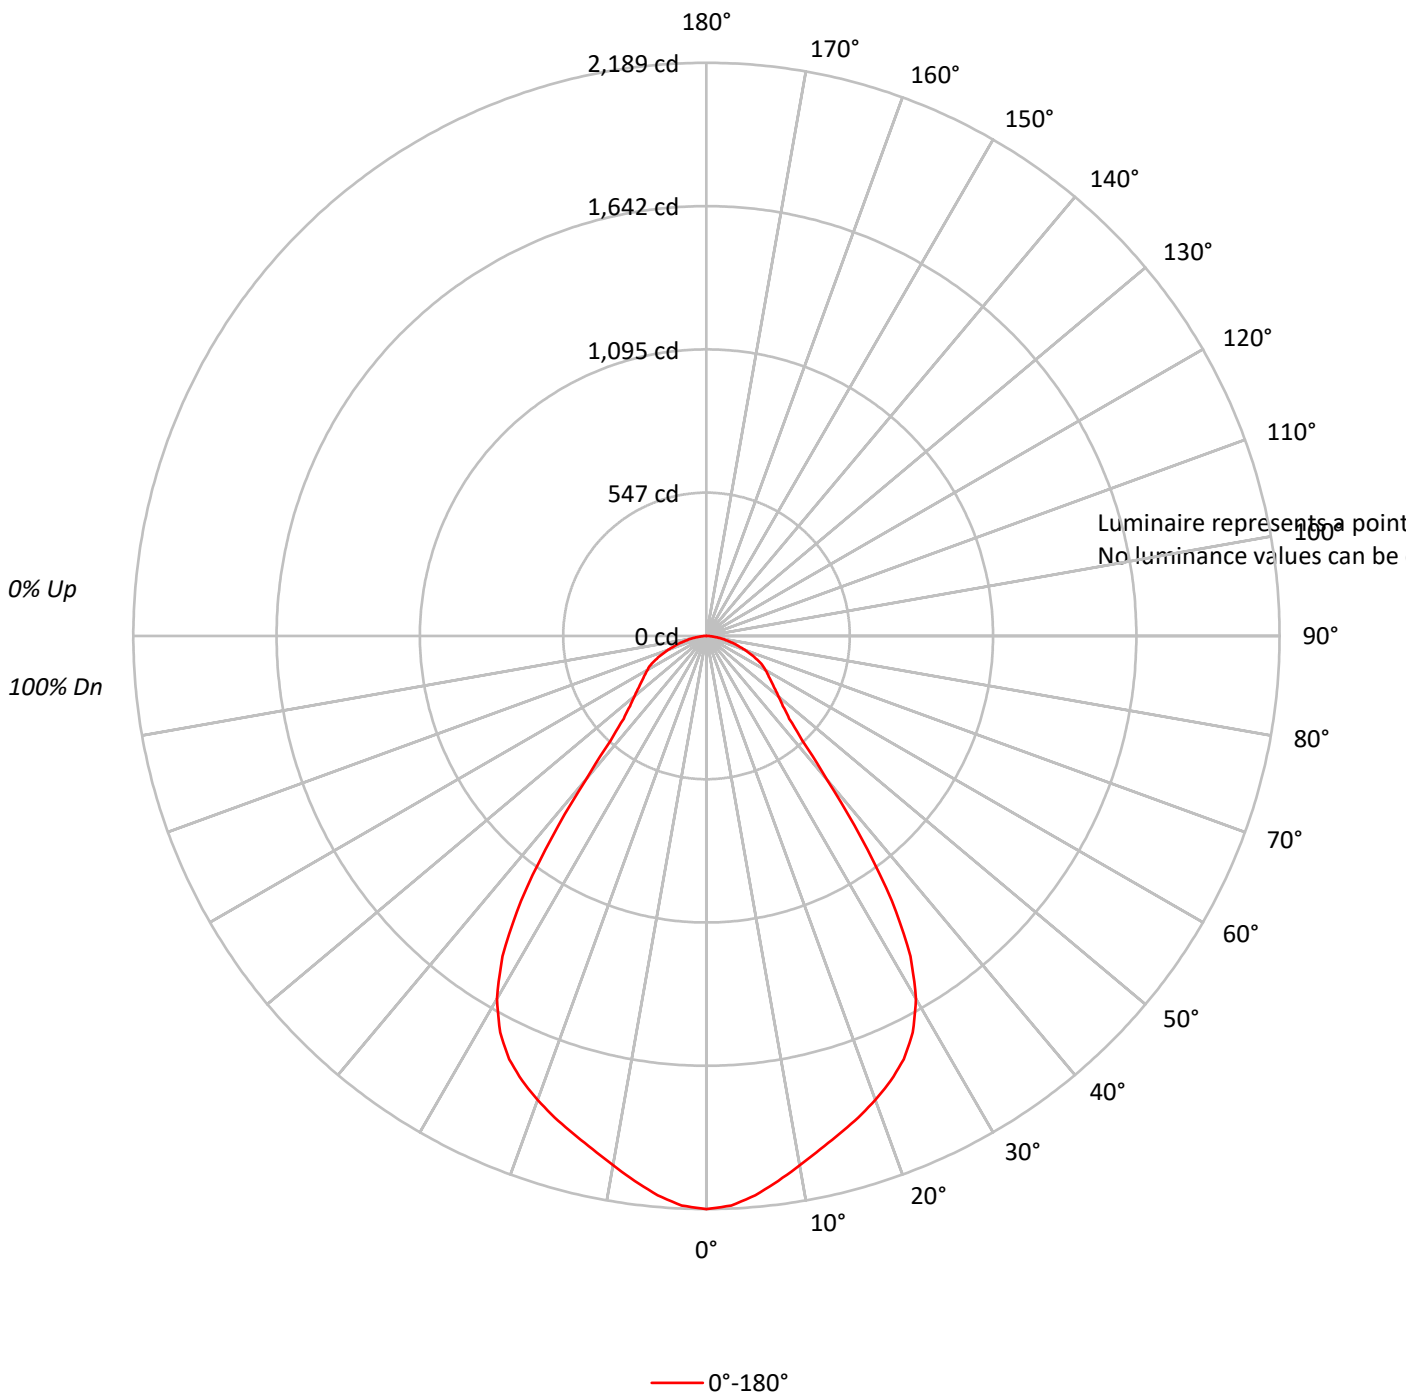



TEST NUMBER: P246604

CATALOG NUMBER: LSR8B40D010 EC8B409730 8LBW0MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	111	107	104	101	109	105	102	99	101	99	96	97	95	93	94	92	91	89
2	103	97	91	87	101	95	90	86	92	87	84	88	85	82	86	83	80	78
3	96	88	81	76	94	86	80	75	83	78	74	81	76	73	78	75	72	70
4	90	80	73	67	88	79	72	67	76	70	66	74	69	65	72	68	64	62
5	84	73	66	60	82	72	65	60	70	64	59	68	63	59	67	62	58	56
6	79	67	60	54	77	66	59	54	65	58	54	63	58	53	62	57	53	51
7	74	62	55	49	72	61	54	49	60	54	49	59	53	49	57	52	48	47
8	69	58	50	45	68	57	50	45	56	50	45	55	49	45	54	48	45	43
9	65	54	47	42	64	53	46	42	52	46	41	51	45	41	50	45	41	40
10	62	50	43	39	61	50	43	39	49	43	38	48	42	38	47	42	38	37

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P246604

CATALOG NUMBER: LSR8B40D010 EC8B409730 8LBW0MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	201.7	6.1
10°-20°	555.5	16.8
20°-30°	814.7	24.7
30°-40°	744.7	22.5
40°-50°	368.7	11.2
50°-60°	272.6	8.3
60°-70°	209.6	6.3
70°-80°	109.2	3.3
80°-90°	27.2	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1571.9	47.6
0°-40°	2316.6	70.1
0°-60°	2958.0	89.5
0°-90°	3304.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3304.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2189	
5°	2144	202
15°	1967	556
25°	1784	815
35°	1236	745
45°	448	369
55°	302	273
65°	214	210
75°	102	109
85°	23	27
90°	0	



TEST NUMBER: P246604

CATALOG NUMBER: LSR8B40D010 EC8B409730 8LBW0MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	2189.1
2.5°	2177.6
5°	2144.1
7.5°	2099.0
10°	2052.9
12.5°	2007.8
15°	1967.0
17.5°	1928.2
20°	1886.3
22.5°	1839.1
25°	1783.6
27.5°	1707.1
30°	1600.2
32.5°	1450.3
35°	1235.5
37.5°	969.3
40°	715.7
42.5°	541.8
45°	447.5
47.5°	396.1
50°	358.4
52.5°	328.0
55°	301.8
57.5°	279.8
60°	260.9
62.5°	241.0
65°	213.8
67.5°	184.4
70°	155.1
72.5°	127.8
75°	101.6
77.5°	78.6
80°	57.6
82.5°	39.8
85°	23.1
87.5°	8.4
90°	0.0

(END OF REPORT)