

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P244883

Luminaire Tested: **LSR8B50D010 EC8B50827 8LBS0WMH**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P244883  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-14)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LSR8B50D010 EC8B50827 8LBS0WMH  
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED  
DOWNLIGHT- CYLINDEC  
80 CRI 2700 CCT WITH WARM HAZE TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5551.0 lumens  
Efficiency: N/A  
Efficacy: 104.7 lumens/watt  
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.25  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 53  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P244883

CATALOG NUMBER: LSR8B50D010 EC8B50827 8LBS0WMH

### Luminous Intensity Polar Plot

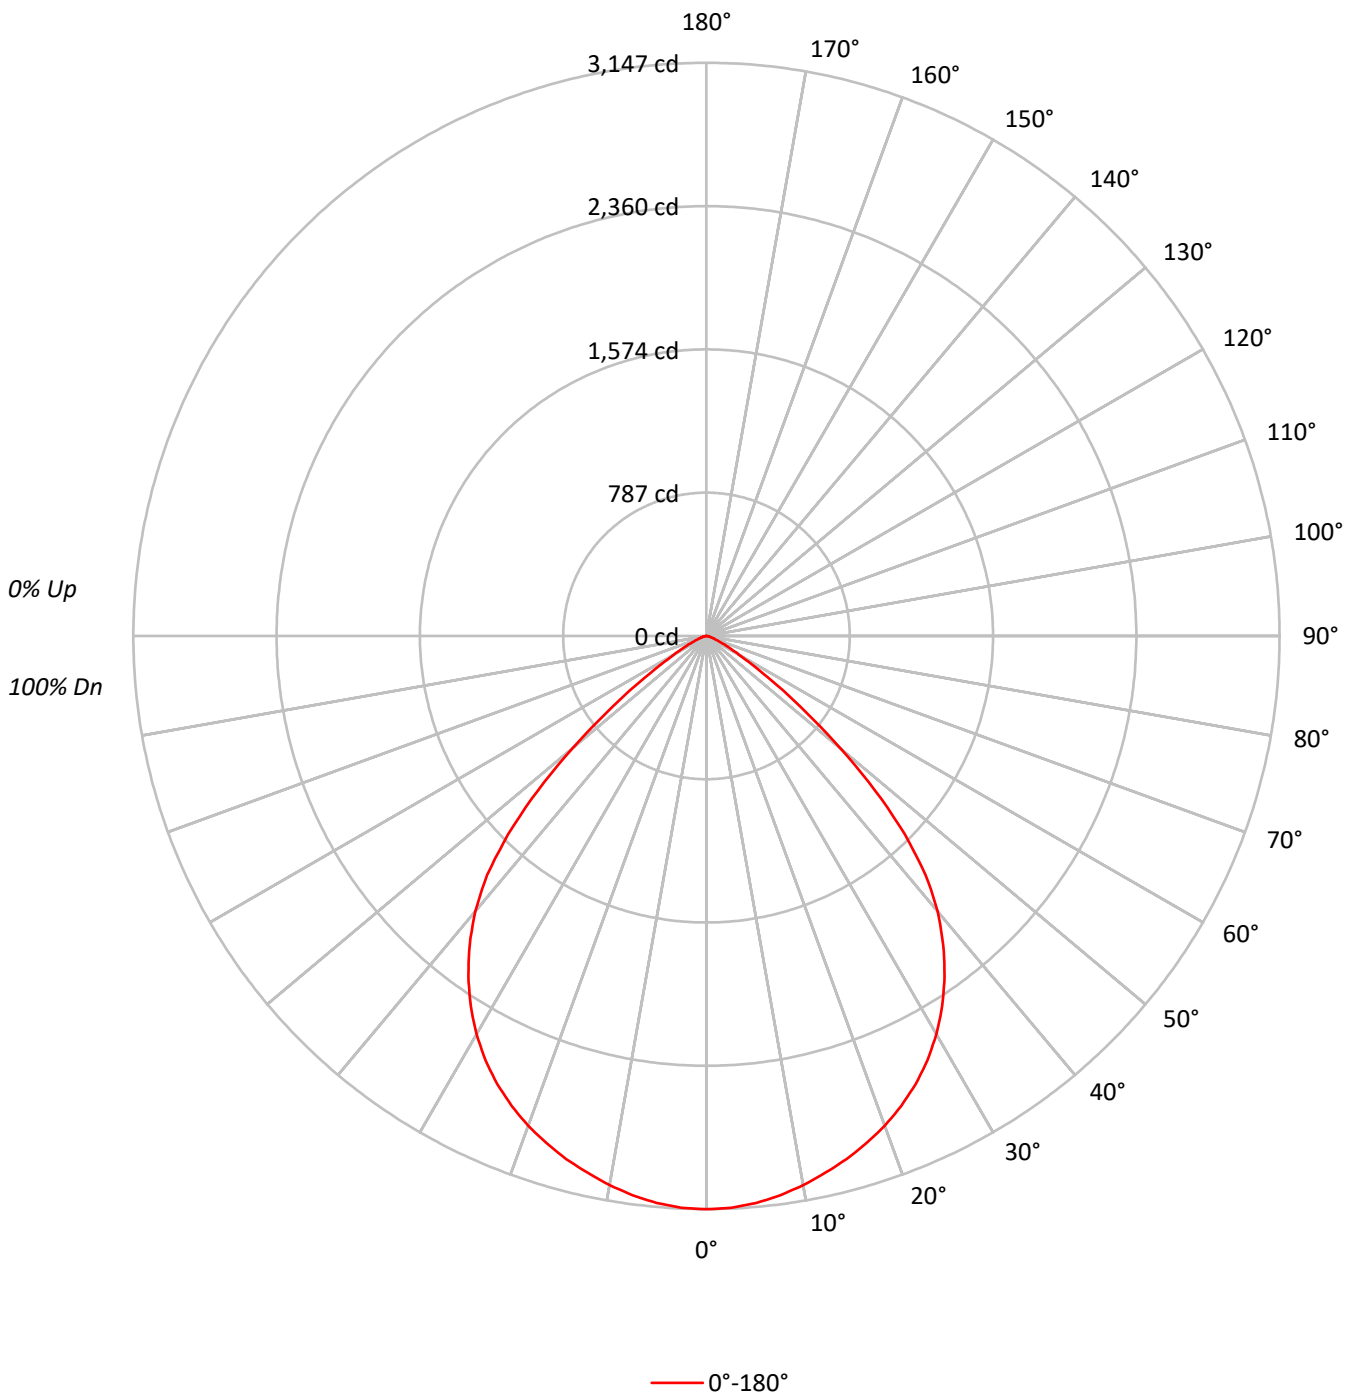



TEST NUMBER: P244883

CATALOG NUMBER: LSR8B50D010 EC8B50827 8LBS0WMH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	107	104	101	102	100	98	99	97	95	95	94	92	91
2	105	99	94	89	102	97	92	88	94	90	86	90	87	85	88	85	83	81
3	98	90	83	78	95	88	82	78	85	80	76	83	79	75	80	77	74	72
4	91	82	75	69	89	80	74	69	78	72	68	76	71	67	74	70	66	65
5	85	74	67	62	83	73	67	61	71	65	61	70	64	60	68	63	60	58
6	79	68	61	55	77	67	60	55	66	59	55	64	58	54	63	58	54	52
7	74	63	55	50	72	62	55	50	60	54	49	59	53	49	58	53	49	47
8	69	58	50	45	68	57	50	45	56	49	45	55	49	45	54	48	45	43
9	65	53	46	41	64	53	46	41	52	45	41	51	45	41	50	45	41	39
10	61	50	43	38	60	49	42	38	48	42	38	47	42	38	46	41	37	36

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	97051
5°	96750
10°	95884
15°	94933
20°	93911
25°	92430
30°	89889
35°	85795
40°	79510
45°	67132
50°	46059
55°	25402
60°	12766
65°	7187
70°	3913
75°	2788
80°	1776
85°	1168



TEST NUMBER: P244883

CATALOG NUMBER: LSR8B50D010 EC8B50827 8LBS0WMH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	296.3	5.3
10°-20°	838.7	15.1
20°-30°	1248.6	22.5
30°-40°	1418.3	25.6
40°-50°	1159.3	20.9
50°-60°	454.3	8.2
60°-70°	105.9	1.9
70°-80°	25.5	0.5
80°-90°	4.1	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2383.5	42.9
0°-40°	3801.9	68.5
0°-60°	5415.5	97.6
0°-90°	5551.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5551.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3147	
5°	3126	296
15°	2974	839
25°	2717	1249
35°	2279	1418
45°	1539	1159
55°	472	454
65°	98	106
75°	23	26
85°	3	4
90°	0	



TEST NUMBER: P244883

CATALOG NUMBER: LSR8B50D010 EC8B50827 8LBS0WMH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3147.3
2.5°	3142.3
5°	3125.6
7.5°	3097.2
10°	3062.2
12.5°	3018.8
15°	2973.7
17.5°	2920.3
20°	2861.8
22.5°	2793.4
25°	2716.6
27.5°	2626.4
30°	2524.5
32.5°	2409.3
35°	2279.1
37.5°	2135.5
40°	1975.2
42.5°	1781.5
45°	1539.4
47.5°	1255.6
50°	960.1
52.5°	689.6
55°	472.5
57.5°	308.9
60°	207.0
62.5°	141.9
65°	98.5
67.5°	65.1
70°	43.4
72.5°	30.1
75°	23.4
77.5°	16.7
80°	10.0
82.5°	5.0
85°	3.3
87.5°	1.7
90°	0.0

(END OF REPORT)