

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P251394

Luminaire Tested: **LSR8B60D010 EC8B60827 8LBS0B**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P251394
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-17)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B60D010 EC8B60827 8LBS0B
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
80 CRI 2700 CCT WITH SPECULAR BLACK TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5332.0 lumens
Efficiency: N/A
Efficacy: 89.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.25
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 59.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P251394

CATALOG NUMBER: LSR8B60D010 EC8B60827 8LBS0B

Luminous Intensity Polar Plot

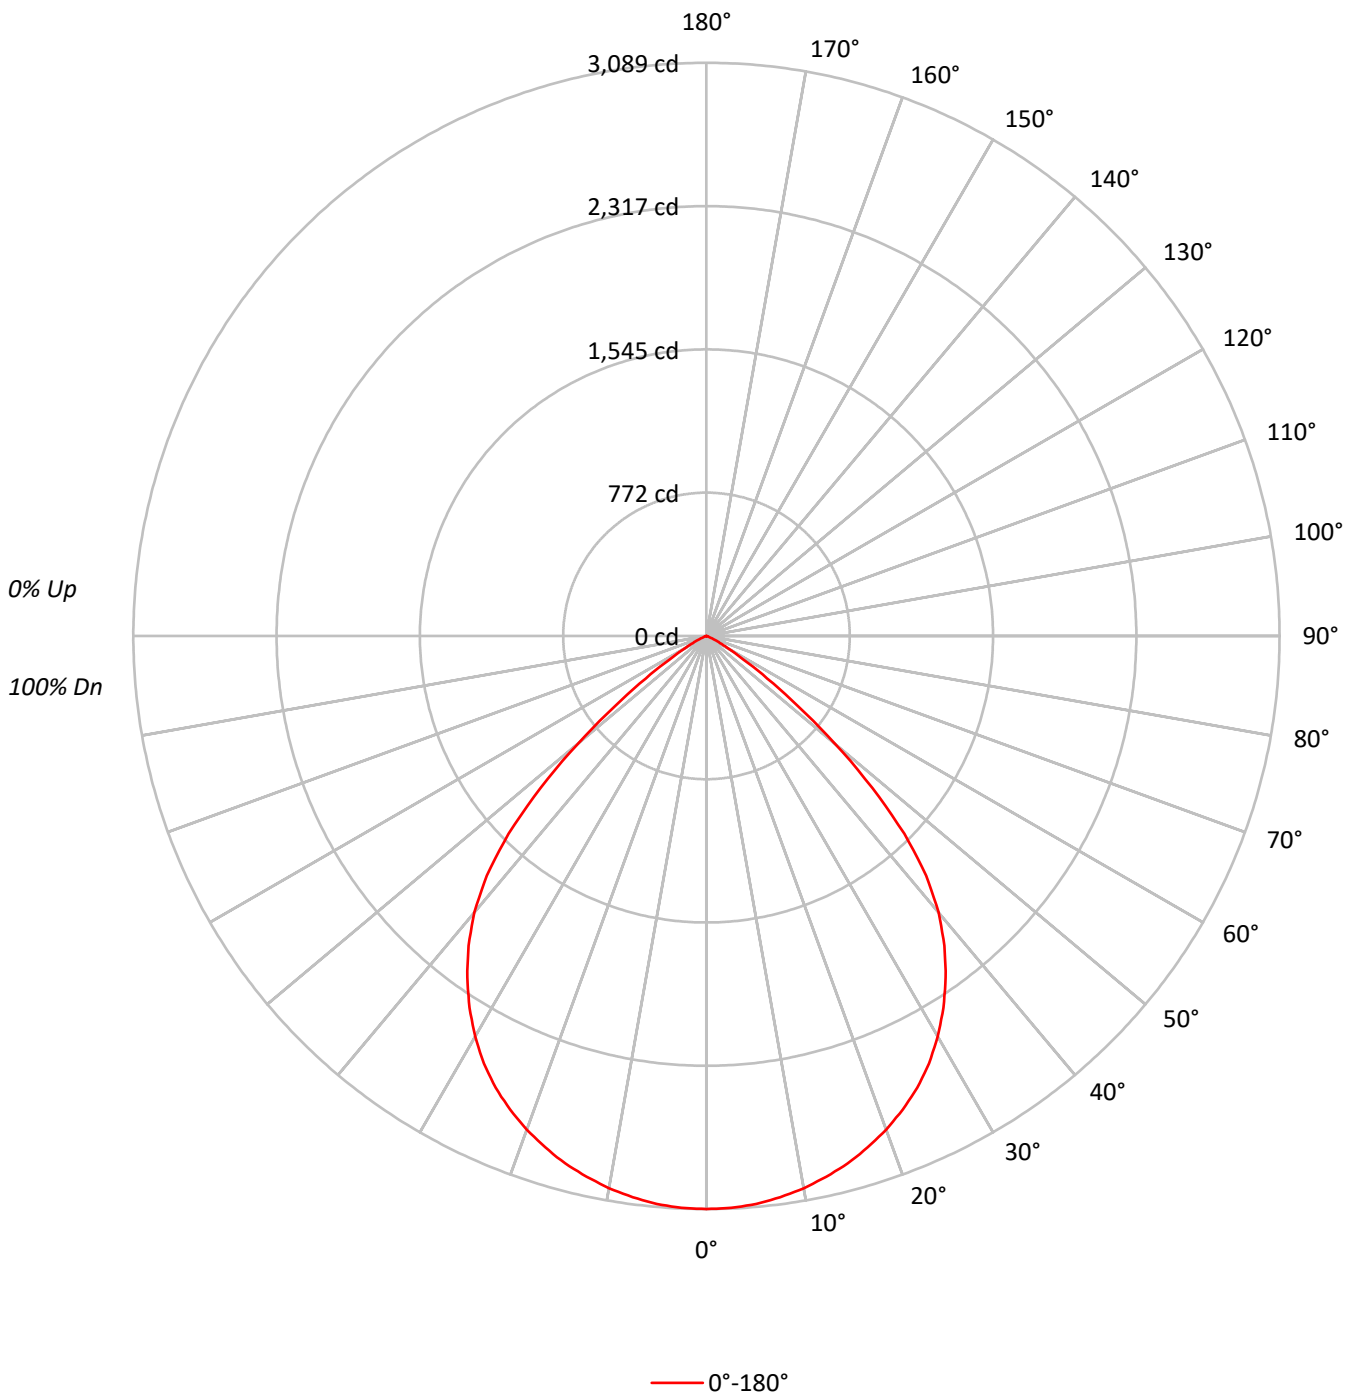



TEST NUMBER: P251394

CATALOG NUMBER: LSR8B60D010 EC8B60827 8LBS0B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	96	94	93	91
2	105	99	94	90	103	98	93	89	94	90	87	91	88	85	88	86	84	82
3	98	90	84	79	96	89	83	79	86	81	77	84	80	76	81	78	75	73
4	92	82	76	70	90	81	75	70	79	73	69	77	72	68	75	71	67	66
5	86	75	68	63	84	74	68	63	72	66	62	71	65	61	69	64	61	59
6	80	69	62	56	78	68	61	56	67	60	56	65	60	55	64	59	55	53
7	75	63	56	51	73	63	56	51	61	55	51	60	54	50	59	54	50	48
8	70	59	51	46	69	58	51	46	57	50	46	56	50	46	54	49	46	44
9	66	54	47	42	65	54	47	42	53	46	42	52	46	42	51	45	42	40
10	62	50	43	39	61	50	43	39	49	43	39	48	42	38	47	42	38	37

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	95247
5°	95144
10°	94644
15°	93959
20°	92920
25°	91450
30°	88768
35°	84590
40°	78350
45°	65741
50°	43463
55°	21456
60°	8517
65°	3313
70°	514
75°	0
80°	0
85°	0



TEST NUMBER: P251394

CATALOG NUMBER: LSR8B60D010 EC8B60827 8LBS0B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	291.7	5.5
10°-20°	829.6	15.6
20°-30°	1234.8	23.2
30°-40°	1398.6	26.2
40°-50°	1130.7	21.2
50°-60°	392.2	7.4
60°-70°	53.6	1.0
70°-80°	0.7	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2356.1	44.2
0°-40°	3754.7	70.4
0°-60°	5277.6	99.0
0°-90°	5332.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5332.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3089	
5°	3074	292
15°	2943	830
25°	2688	1235
35°	2247	1399
45°	1508	1131
55°	399	392
65°	45	54
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P251394

CATALOG NUMBER: LSR8B60D010 EC8B60827 8LBS0B

CANDELA DISTRIBUTION (FULL):

	0°
0°	3088.8
2.5°	3085.0
5°	3073.7
7.5°	3051.0
10°	3022.6
12.5°	2984.8
15°	2943.2
17.5°	2890.2
20°	2831.6
22.5°	2763.5
25°	2687.8
27.5°	2597.0
30°	2493.0
32.5°	2375.7
35°	2247.1
37.5°	2105.2
40°	1946.4
42.5°	1751.5
45°	1507.5
47.5°	1212.4
50°	906.0
52.5°	620.4
55°	399.1
57.5°	236.4
60°	138.1
62.5°	81.3
65°	45.4
67.5°	20.8
70°	5.7
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)