

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P251006

Luminaire Tested: **LSR8B60D010 EC8B60930 8LBS0H**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P251006
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-13)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B60D010 EC8B60930 8LBS0H
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
97 CRI 3000 CCT WITH SEMI-SPECULAR CLEAR TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5646.5 lumens
Efficiency: N/A
Efficacy: 94.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.23
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 59.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P251006

CATALOG NUMBER: LSR8B60D010 EC8B60930 8LBS0H

Luminous Intensity Polar Plot

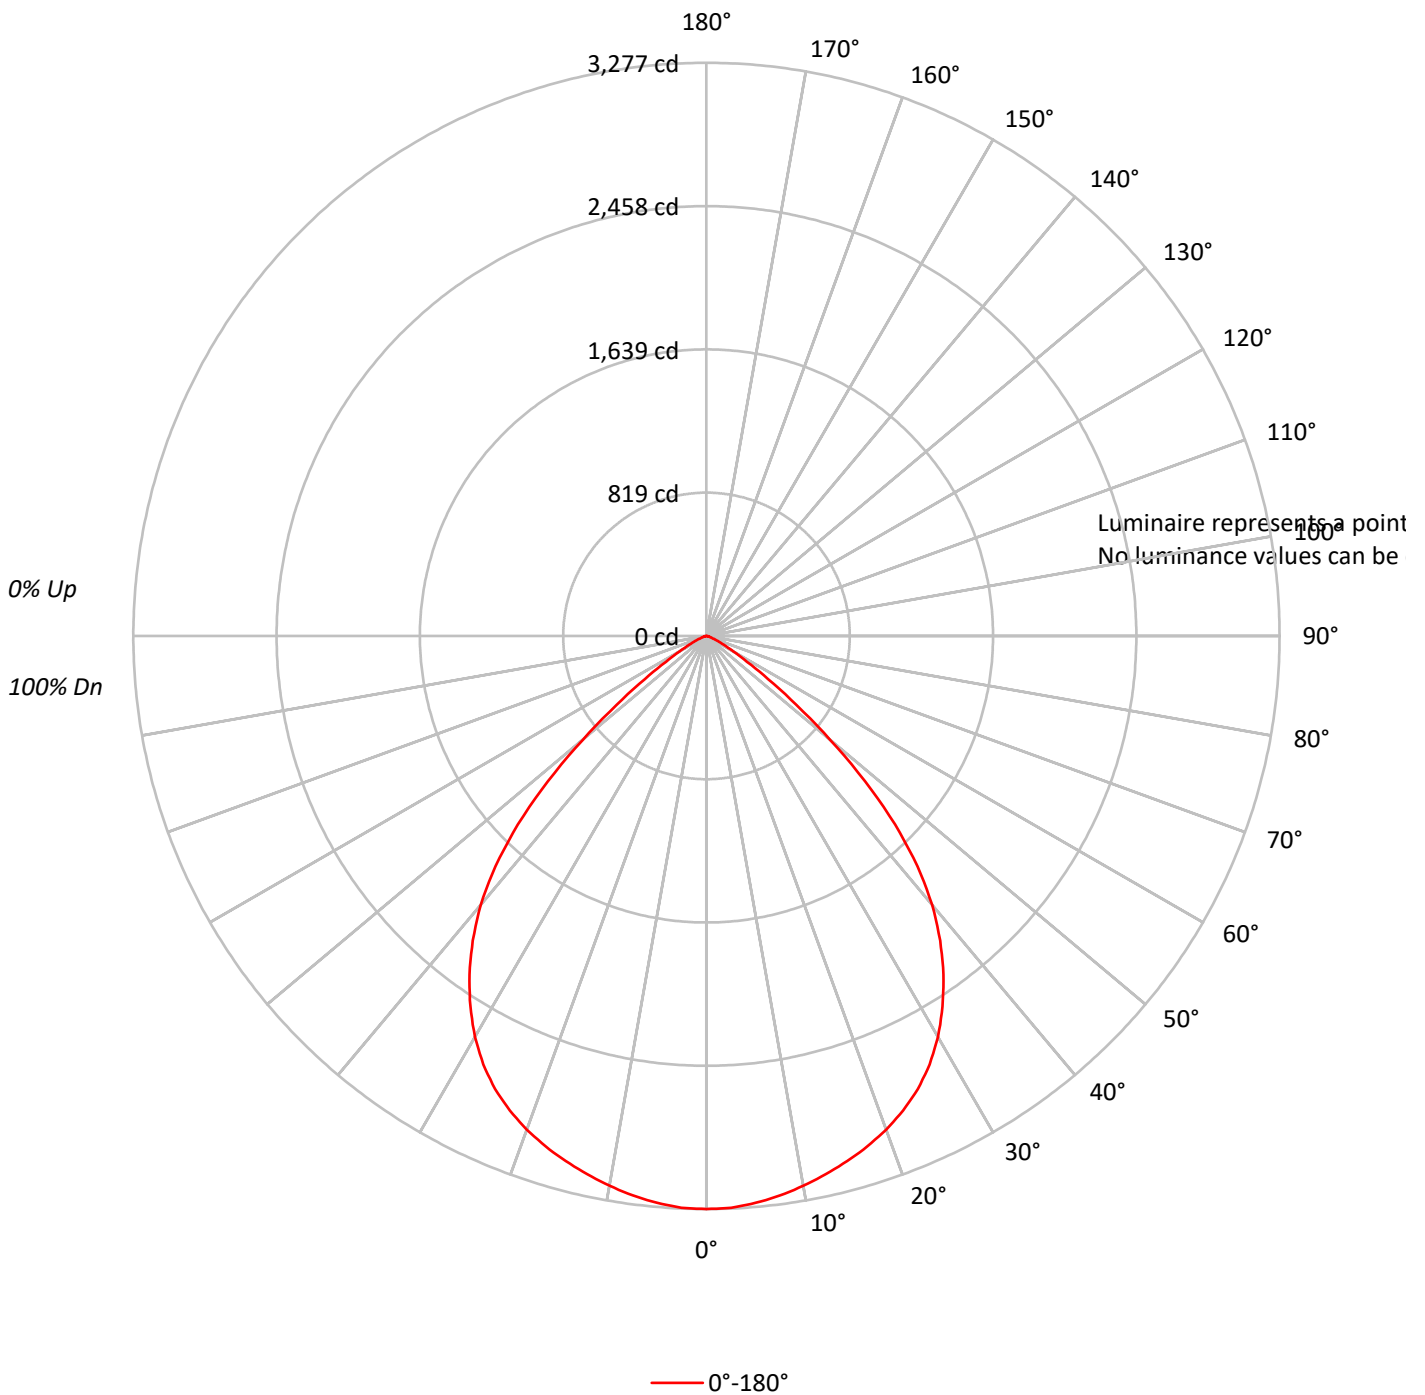



TEST NUMBER: P251006

CATALOG NUMBER: LSR8B60D010 EC8B60930 8LBS0H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	107	104	102	103	100	98	99	97	95	95	94	93	91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81
3	98	90	84	79	96	89	83	78	86	81	77	83	79	76	81	78	75	73
4	91	82	75	70	89	81	75	70	79	73	69	76	72	68	74	70	67	65
5	85	75	68	63	83	74	67	62	72	66	62	70	65	61	69	64	60	59
6	80	69	61	56	78	68	61	56	66	60	56	65	59	55	63	58	55	53
7	75	63	56	51	73	63	56	51	61	55	50	60	54	50	59	54	50	48
8	70	58	51	46	68	58	51	46	57	50	46	55	50	46	54	49	45	44
9	66	54	47	42	64	53	47	42	52	46	42	51	46	42	51	45	42	40
10	62	50	43	39	61	50	43	39	49	43	38	48	42	38	47	42	38	37

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P251006

CATALOG NUMBER: LSR8B60D010 EC8B60930 8LBS0H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	308.6	5.5
10°-20°	877.4	15.5
20°-30°	1312.5	23.2
30°-40°	1468.1	26.0
40°-50°	1151.7	20.4
50°-60°	420.3	7.4
60°-70°	85.7	1.5
70°-80°	18.4	0.3
80°-90°	3.9	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2498.5	44.2
0°-40°	3966.6	70.2
0°-60°	5538.6	98.1
0°-90°	5646.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5646.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3277	
5°	3254	309
15°	3109	877
25°	2859	1313
35°	2363	1468
45°	1525	1152
55°	430	420
65°	78	86
75°	17	18
85°	3	4
90°	0	



TEST NUMBER: P251006

CATALOG NUMBER: LSR8B60D010 EC8B60930 8LBS0H

CANDELA DISTRIBUTION (FULL):

	0°
0°	3276.8
2.5°	3271.9
5°	3253.5
7.5°	3226.8
10°	3191.9
12.5°	3151.9
15°	3108.6
17.5°	3060.3
20°	3003.7
22.5°	2937.1
25°	2858.9
27.5°	2762.3
30°	2647.5
32.5°	2512.5
35°	2362.7
37.5°	2194.5
40°	2008.0
42.5°	1786.5
45°	1525.2
47.5°	1230.5
50°	924.2
52.5°	647.7
55°	429.6
57.5°	274.8
60°	176.4
62.5°	116.6
65°	78.2
67.5°	50.0
70°	31.6
72.5°	21.6
75°	16.7
77.5°	11.7
80°	8.3
82.5°	5.0
85°	3.4
87.5°	1.7
90°	0.0

(END OF REPORT)