

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P251070

Luminaire Tested: **LSR8B60D010 EC8B60935 8LBM0WMH**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P251070
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P201704)
Test Lab: INNOVATION CENTER-P1
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B60D010 EC8B60935 8LBM0WMH
Description: PORTFOLIO 8 INCH MEDIUM DISTRIBUTION 55 DEG CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
90 CRI 3500 CCT WITH WARM HAZE TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5087.0 lumens
Efficiency: N/A
Efficacy: 85.5 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.83
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 59.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P251070

CATALOG NUMBER: LSR8B60D010 EC8B60935 8LBM0WMH

Luminous Intensity Polar Plot

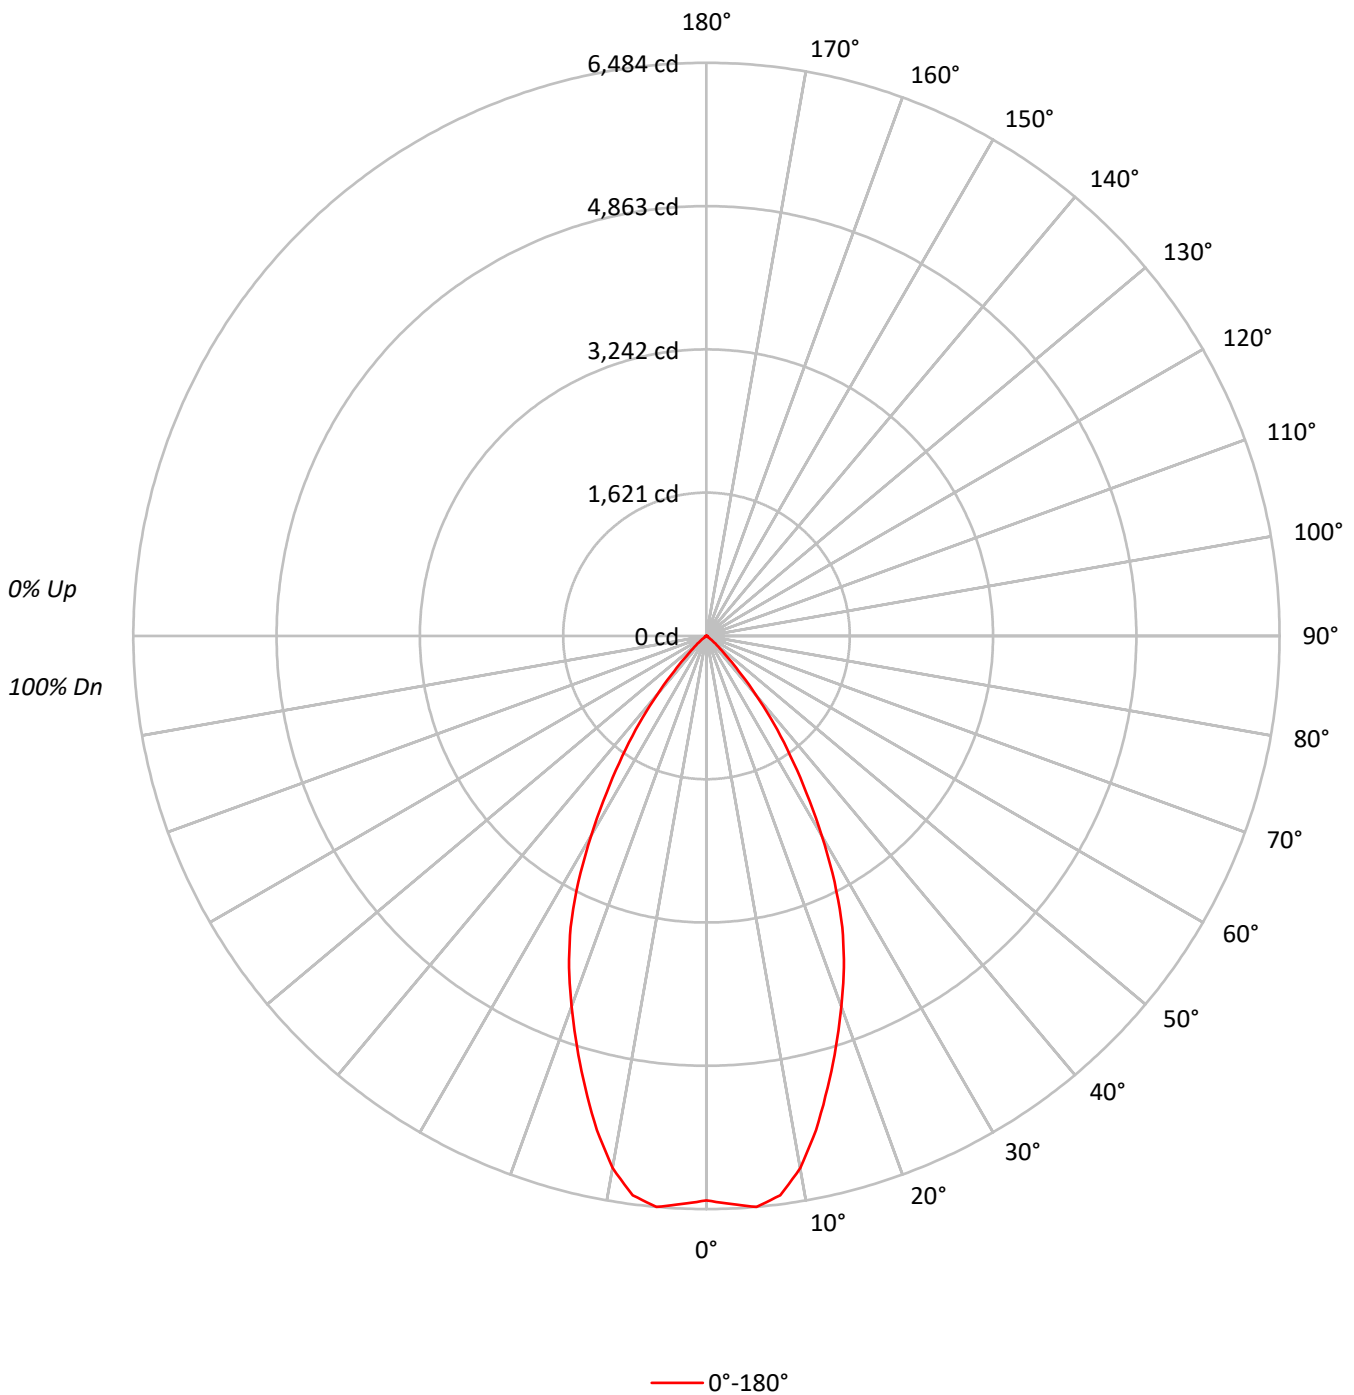



TEST NUMBER: P251070

CATALOG NUMBER: LSR8B60D010 EC8B60935 8LBM0WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | 0 | | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | | 50 | 30 | 10 | | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | | 106 | 106 | 106 | | 102 | 102 | 102 | 100 |
| 1 | 114 | 111 | 109 | 106 | 111 | 109 | 107 | 105 | 105 | 103 | 101 | | 101 | 100 | 98 | | 98 | 97 | 96 | 94 |
| 2 | 108 | 104 | 100 | 96 | 106 | 102 | 98 | 95 | 99 | 96 | 93 | | 96 | 93 | 91 | | 93 | 91 | 89 | 88 |
| 3 | 103 | 97 | 92 | 88 | 101 | 95 | 91 | 87 | 93 | 89 | 86 | | 90 | 87 | 85 | | 88 | 86 | 83 | 82 |
| 4 | 98 | 91 | 85 | 81 | 96 | 89 | 84 | 81 | 87 | 83 | 80 | | 85 | 82 | 79 | | 83 | 80 | 78 | 76 |
| 5 | 93 | 85 | 79 | 75 | 92 | 84 | 79 | 75 | 82 | 78 | 74 | | 81 | 77 | 73 | | 79 | 76 | 73 | 71 |
| 6 | 89 | 80 | 74 | 70 | 87 | 79 | 74 | 70 | 78 | 73 | 69 | | 76 | 72 | 69 | | 75 | 71 | 68 | 67 |
| 7 | 84 | 75 | 69 | 65 | 83 | 75 | 69 | 65 | 73 | 68 | 65 | | 72 | 68 | 64 | | 71 | 67 | 64 | 63 |
| 8 | 80 | 71 | 65 | 61 | 79 | 71 | 65 | 61 | 69 | 64 | 61 | | 68 | 64 | 61 | | 67 | 63 | 60 | 59 |
| 9 | 77 | 67 | 61 | 58 | 76 | 67 | 61 | 57 | 66 | 61 | 57 | | 65 | 60 | 57 | | 64 | 60 | 57 | 56 |
| 10 | 73 | 64 | 58 | 54 | 72 | 63 | 58 | 54 | 62 | 58 | 54 | | 62 | 57 | 54 | | 61 | 57 | 54 | 53 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|--------|
| | 0° |
| 0° | 196918 |
| 5° | 200700 |
| 10° | 191354 |
| 15° | 168965 |
| 20° | 146422 |
| 25° | 123722 |
| 30° | 92976 |
| 35° | 62256 |
| 40° | 34864 |
| 45° | 14003 |
| 50° | 4850 |
| 55° | 1344 |
| 60° | 759 |
| 65° | 664 |
| 70° | 0 |
| 75° | 0 |
| 80° | 0 |
| 85° | 0 |



TEST NUMBER: P251070

CATALOG NUMBER: LSR8B60D010 EC8B60935 8LBM0WMH

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 606.6 | 11.9 |
| 10°-20° | 1476.3 | 29.0 |
| 20°-30° | 1638.2 | 32.2 |
| 30°-40° | 1037.8 | 20.4 |
| 40°-50° | 288.0 | 5.7 |
| 50°-60° | 33.0 | 0.6 |
| 60°-70° | 6.5 | 0.1 |
| 70°-80° | 0.7 | 0.0 |
| 80°-90° | 0.0 | 0.0 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 3721.1 | 73.1 |
| 0°-40° | 4758.9 | 93.6 |
| 0°-60° | 5079.8 | 99.9 |
| 0°-90° | 5087.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 5087.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|------|------|------|
| 0° | 6386 | |
| 5° | 6484 | 607 |
| 15° | 5293 | 1476 |
| 25° | 3636 | 1638 |
| 35° | 1654 | 1038 |
| 45° | 321 | 288 |
| 55° | 25 | 33 |
| 65° | 9 | 6 |
| 75° | 0 | 1 |
| 85° | 0 | 0 |
| 90° | 0 | 0 |
| 95° | 0 | 0 |
| 105° | 0 | 0 |
| 115° | 0 | 0 |
| 125° | 0 | 0 |
| 135° | 0 | 0 |
| 145° | 0 | 0 |
| 155° | 0 | 0 |
| 165° | 0 | 0 |
| 175° | 0 | 0 |
| 180° | 0 | 0 |



TEST NUMBER: P251070

CATALOG NUMBER: LSR8B60D010 EC8B60935 8LBM0WMH

CANDELA DISTRIBUTION (FULL):

| 0° | |
|--------|--------|
| 0° | 6385.9 |
| 2.5° | 6433.1 |
| 5° | 6483.8 |
| 7.5° | 6382.7 |
| 10° | 6111.2 |
| 12.5° | 5724.0 |
| 15° | 5292.7 |
| 17.5° | 4869.1 |
| 20° | 4462.0 |
| 22.5° | 4062.4 |
| 25° | 3636.3 |
| 27.5° | 3137.9 |
| 30° | 2611.2 |
| 32.5° | 2101.0 |
| 35° | 1653.8 |
| 37.5° | 1249.7 |
| 40° | 866.1 |
| 42.5° | 538.6 |
| 45° | 321.1 |
| 47.5° | 184.7 |
| 50° | 101.1 |
| 52.5° | 49.5 |
| 55° | 25.0 |
| 57.5° | 18.8 |
| 60° | 12.3 |
| 62.5° | 6.5 |
| 65° | 9.1 |
| 67.5° | 4.5 |
| 70° | 0.0 |
| 72.5° | 1.3 |
| 75° | 0.0 |
| 77.5° | 1.3 |
| 80° | 0.0 |
| 82.5° | 0.0 |
| 85° | 0.0 |
| 87.5° | 0.0 |
| 90° | 0.0 |
| 92.5° | 0.0 |
| 95° | 0.0 |
| 97.5° | 0.0 |
| 100° | 0.0 |
| 102.5° | 0.0 |
| 105° | 0.0 |
| 107.5° | 0.0 |
| 110° | 0.0 |



TEST NUMBER: P251070

CATALOG NUMBER: LSR8B60D010 EC8B60935 8LBM0WMH

CANDELA DISTRIBUTION (continued):

| | 0° |
|--------|-----|
| 112.5° | 0.0 |
| 115° | 0.0 |
| 117.5° | 0.0 |
| 120° | 0.0 |
| 122.5° | 0.0 |
| 125° | 0.0 |
| 127.5° | 0.0 |
| 130° | 0.0 |
| 132.5° | 0.0 |
| 135° | 0.0 |
| 137.5° | 0.0 |
| 140° | 0.0 |
| 142.5° | 0.0 |
| 145° | 0.0 |
| 147.5° | 0.0 |
| 150° | 0.0 |
| 152.5° | 0.0 |
| 155° | 0.0 |
| 157.5° | 0.0 |
| 160° | 0.0 |
| 162.5° | 0.0 |
| 165° | 0.0 |
| 167.5° | 0.0 |
| 170° | 0.0 |
| 172.5° | 0.0 |
| 175° | 0.0 |
| 177.5° | 0.0 |
| 180° | 0.0 |

(END OF REPORT)