

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P243876

Luminaire Tested: **LSR8B10D010 EC8B10830 8LBN0LI**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P243876
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-10)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B10D010 EC8B10830 8LBNOLI
Description: PORTFOLIO 8 INCH NARROW DISTRIBUTION 50 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
80 CRI 3000 CCT WITH SPECULAR CLEAR TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1065.0 lumens
Efficiency: N/A
Efficacy: 104.4 lumens/watt
Spacing Criteria (0/90/45): 0.25 / 0.25 / 0.32
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 10.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P243876

CATALOG NUMBER: LSR8B10D010 EC8B10830 8LBNOLI

Luminous Intensity Polar Plot

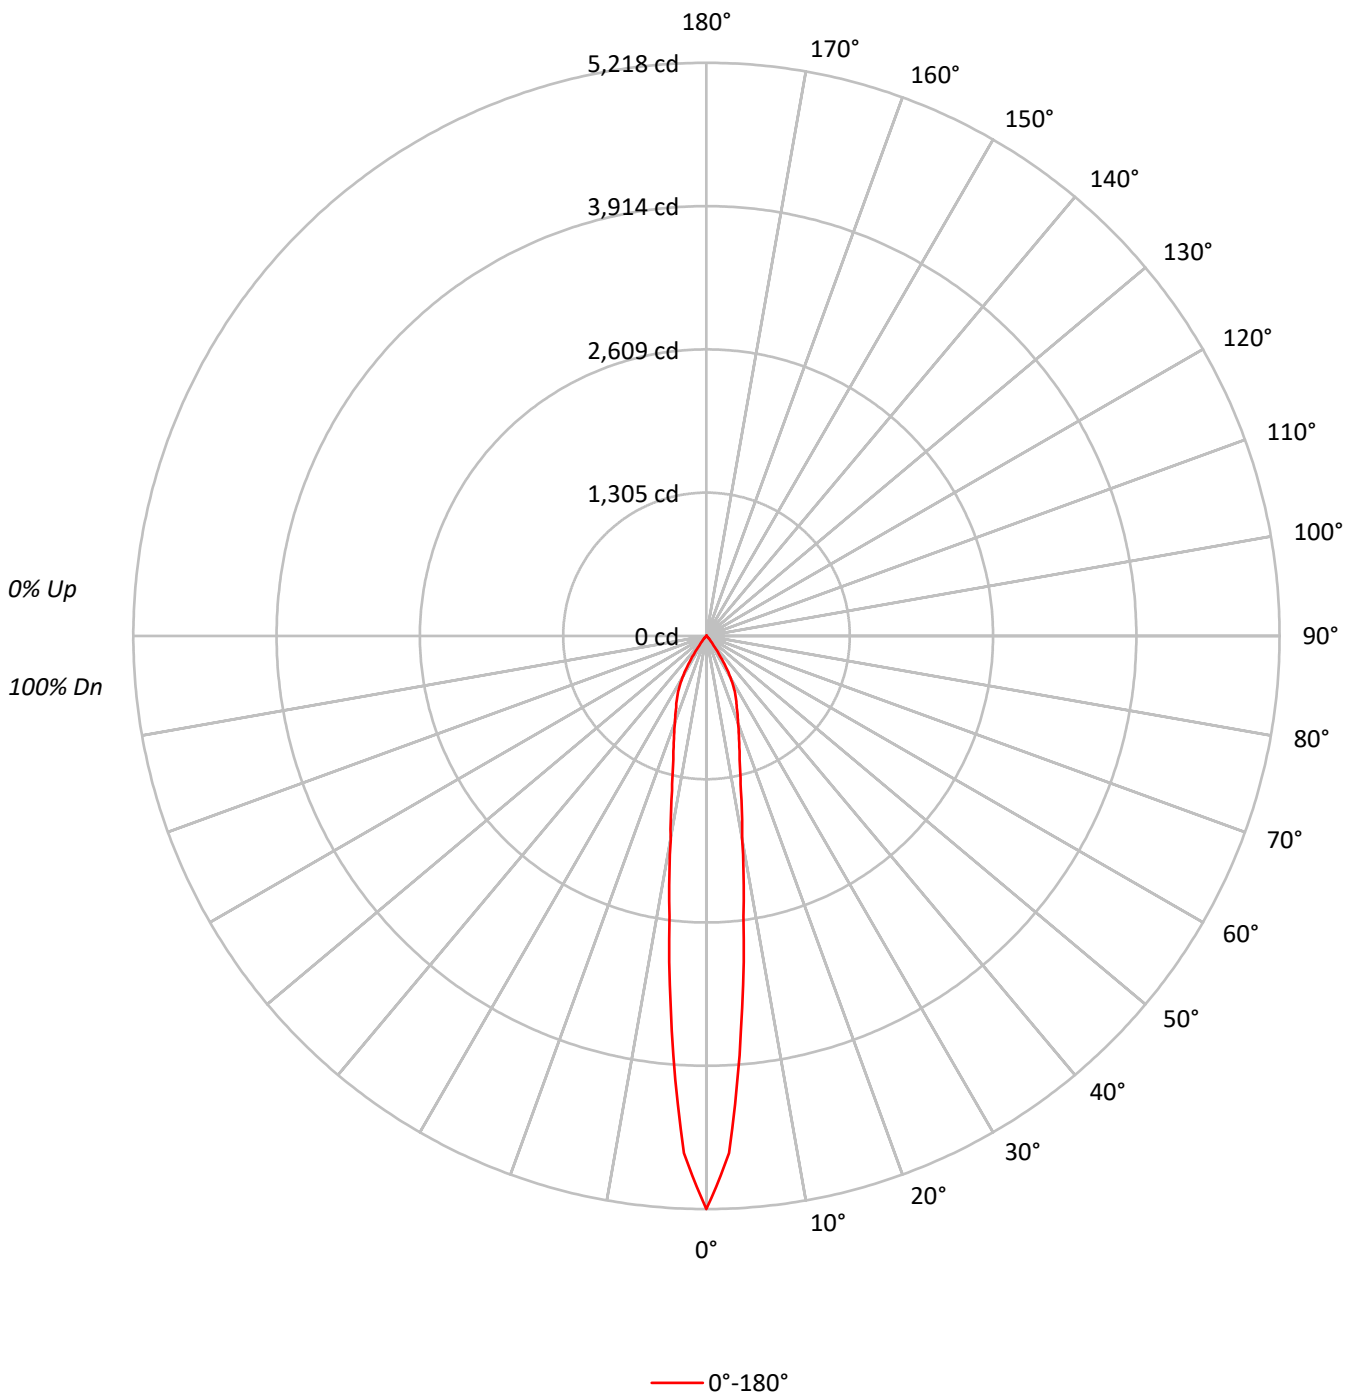



TEST NUMBER: P243876

CATALOG NUMBER: LSR8B10D010 EC8B10830 8LBNOLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95
2	110	106	102	100	108	104	101	99	101	99	96	98	96	94	95	94	92	91
3	106	100	96	93	104	99	95	92	96	93	91	94	92	89	92	90	88	87
4	102	95	91	87	100	94	90	87	92	89	86	90	87	85	89	86	84	83
5	98	91	86	83	96	90	86	82	88	85	82	87	84	81	85	83	80	79
6	94	87	82	79	93	86	82	78	85	81	78	83	80	77	82	79	77	76
7	91	83	78	75	90	83	78	75	81	77	74	80	77	74	79	76	74	72
8	88	80	75	72	86	79	75	71	78	74	71	77	74	71	76	73	71	70
9	85	77	72	69	84	76	72	69	75	71	68	75	71	68	74	70	68	67
10	82	74	69	66	81	73	69	66	73	69	66	72	68	66	71	68	65	64

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	160898
5°	111751
10°	58807
15°	37208
20°	27650
25°	21738
30°	15649
35°	6716
40°	2339
45°	898
50°	206
55°	75
60°	0
65°	102
70°	36
75°	83
80°	124
85°	0



TEST NUMBER: P243876

CATALOG NUMBER: LSR8B10D010 EC8B10830 8LBNOLI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	289.4	27.2
10°-20°	336.3	31.6
20°-30°	290.2	27.3
30°-40°	125.9	11.8
40°-50°	19.7	1.9
50°-60°	1.4	0.1
60°-70°	0.8	0.1
70°-80°	0.8	0.1
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
<hr/>		
0°-30°	916.0	86.0
0°-40°	1041.9	97.8
0°-60°	1063.0	99.8
0°-90°	1065.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1065.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5218	
5°	3610	289
15°	1166	336
25°	639	290
35°	178	126
45°	21	20
55°	1	1
65°	1	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P243876

CATALOG NUMBER: LSR8B10D010 EC8B10830 8LBNOLI

CANDELA DISTRIBUTION (FULL):

	0°
0°	5217.8
2.5°	4711.8
5°	3610.2
7.5°	2574.8
10°	1878.1
12.5°	1441.1
15°	1165.5
17.5°	980.2
20°	842.6
22.5°	725.2
25°	638.9
27.5°	547.9
30°	439.5
32.5°	305.5
35°	178.4
37.5°	99.7
40°	58.1
42.5°	36.1
45°	20.6
47.5°	16.6
50°	4.3
52.5°	2.2
55°	1.4
57.5°	0.7
60°	0.0
62.5°	0.4
65°	1.4
67.5°	1.1
70°	0.4
72.5°	1.8
75°	0.7
77.5°	0.0
80°	0.7
82.5°	0.4
85°	0.0
87.5°	0.7
90°	0.0

(END OF REPORT)