

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P244686

Luminaire Tested: **LSR8B10D010 EC8B10850 8LBW0WMH**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P244686  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-44)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LSR8B10D010 EC8B10850 8LBW0WMH  
Description: PORTFOLIO 8 INCH WIDE DISTRIBUTION 60 DEGREE CUTOFF RECESSED  
DOWNLIGHT- CYLINDEC  
80 CRI 5000 CCT WITH WARM HAZE TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1116.0 lumens  
Efficiency: N/A  
Efficacy: 109.4 lumens/watt  
Spacing Criteria (0/90/45): 1.14 / 1.14 / 1.06  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 10.2  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P244686

CATALOG NUMBER: LSR8B10D010 EC8B10850 8LBW0WMH

### Luminous Intensity Polar Plot

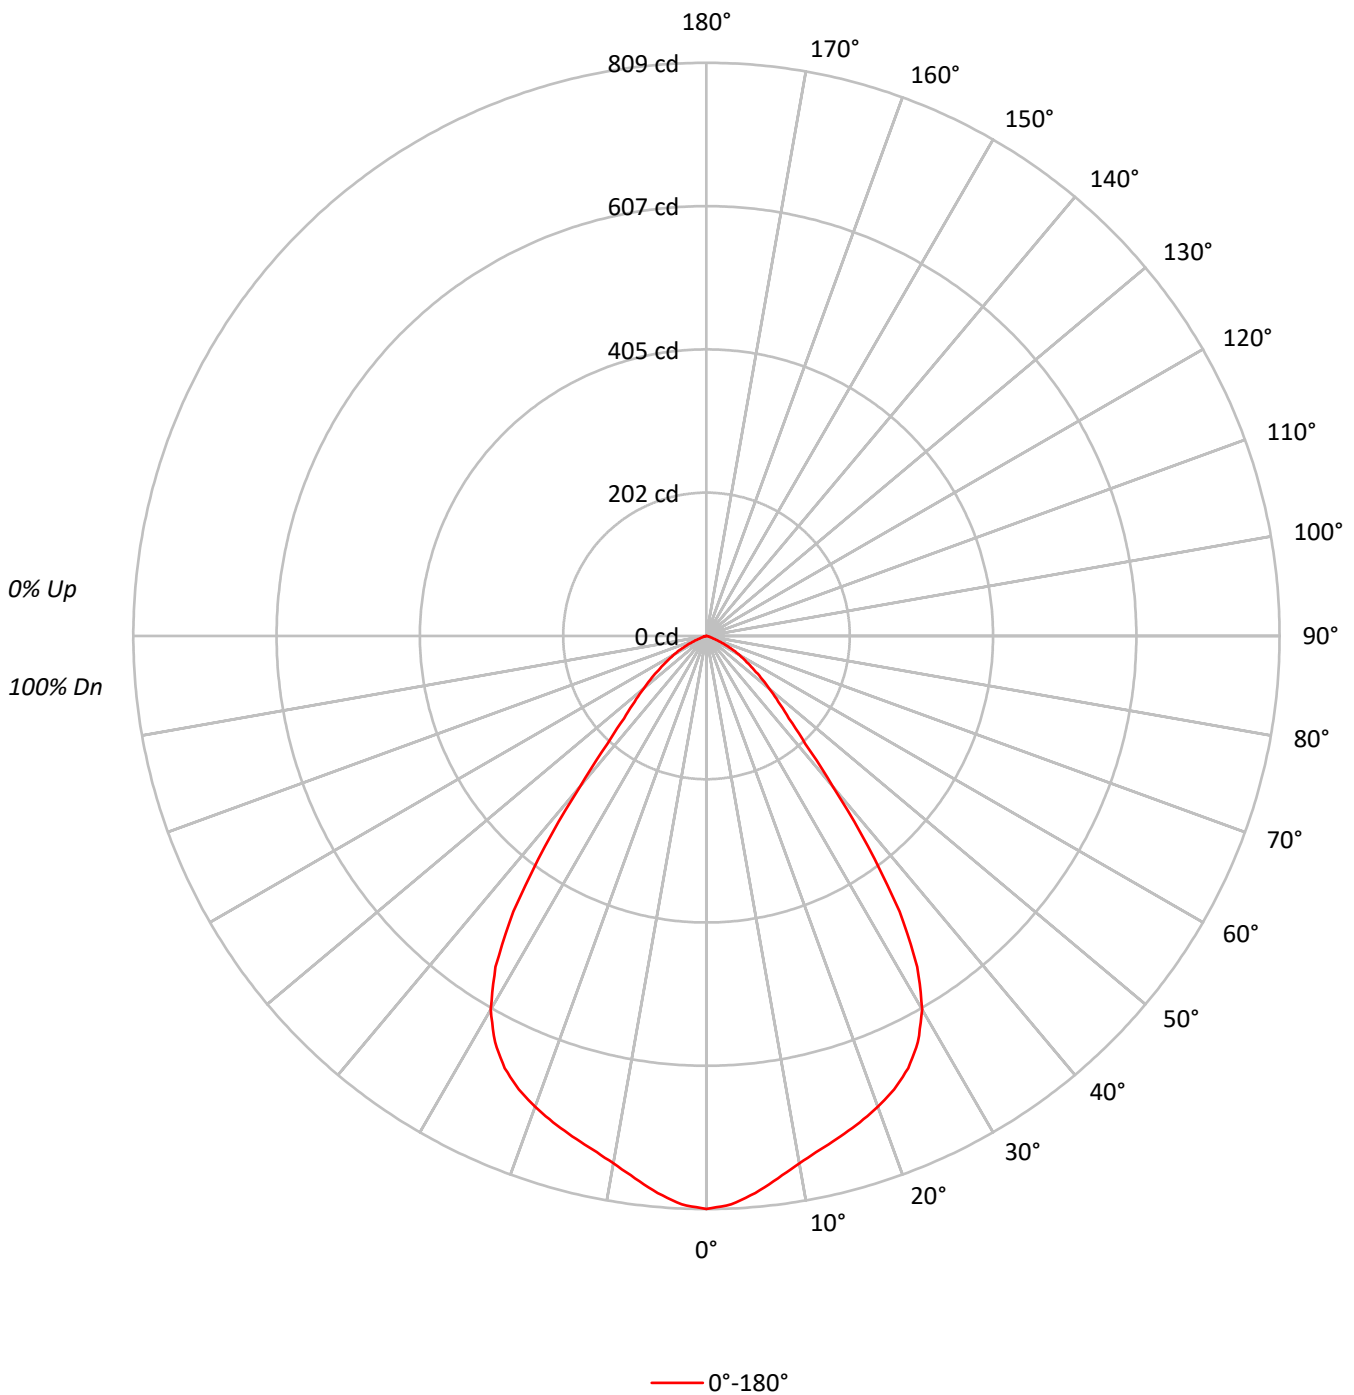



TEST NUMBER: P244686

CATALOG NUMBER: LSR8B10D010 EC8B10850 8LBW0WMH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	84	83
3	99	91	86	81	97	90	85	80	87	83	79	85	81	78	82	79	76	75
4	93	84	77	72	91	83	77	72	80	75	71	78	74	70	76	73	69	68
5	87	77	70	65	85	76	70	65	74	69	64	73	68	64	71	67	63	62
6	82	71	64	59	80	70	64	59	69	63	59	67	62	58	66	61	58	56
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	61	57	53	51
8	72	61	54	50	71	61	54	50	60	54	49	58	53	49	57	53	49	47
9	68	57	50	46	67	57	50	46	56	50	46	55	49	45	54	49	45	44
10	65	54	47	42	63	53	47	42	52	46	42	51	46	42	51	46	42	41

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	24940
5°	24438
10°	23662
15°	23346
20°	23207
25°	22912
30°	21681
35°	17881
40°	11166
45°	7178
50°	5570
55°	4285
60°	3250
65°	2109
70°	902
75°	441
80°	195
85°	142



TEST NUMBER: P244686

CATALOG NUMBER: LSR8B10D010 EC8B10850 8LBW0WMH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	74.3	6.7
10°-20°	206.6	18.5
20°-30°	307.7	27.6
30°-40°	285.8	25.6
40°-50°	135.0	12.1
50°-60°	72.5	6.5
60°-70°	29.1	2.6
70°-80°	4.6	0.4
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	588.6	52.7
0°-40°	874.4	78.3
0°-60°	1081.9	96.9
0°-90°	1116.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1116.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	809	
5°	790	74
15°	731	207
25°	673	308
35°	475	286
45°	165	135
55°	80	73
65°	29	29
75°	4	5
85°	0	0
90°	0	



TEST NUMBER: P244686

CATALOG NUMBER: LSR8B10D010 EC8B10850 8LBW0WMH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	808.8
2.5°	803.2
5°	789.5
7.5°	772.1
10°	755.7
12.5°	742.4
15°	731.3
17.5°	719.8
20°	707.2
22.5°	692.7
25°	673.4
27.5°	646.4
30°	608.9
32.5°	554.0
35°	475.0
37.5°	374.2
40°	277.4
42.5°	206.6
45°	164.6
47.5°	137.6
50°	116.1
52.5°	96.8
55°	79.7
57.5°	64.9
60°	52.7
62.5°	41.2
65°	28.9
67.5°	17.1
70°	10.0
72.5°	5.9
75°	3.7
77.5°	2.2
80°	1.1
82.5°	0.7
85°	0.4
87.5°	0.0
90°	0.0

(END OF REPORT)