

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P244920

Luminaire Tested: **LSR8B10D010 EC8B10935 8LBS0WMH**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P244920
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-14)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B10D010 EC8B10935 8LBS0WMH
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
90 CRI 3500 CCT WITH WARM HAZE TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1034.0 lumens
Efficiency: N/A
Efficacy: 101.4 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.25
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 10.2
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P244920

CATALOG NUMBER: LSR8B10D010 EC8B10935 8LBS0WMH

Luminous Intensity Polar Plot

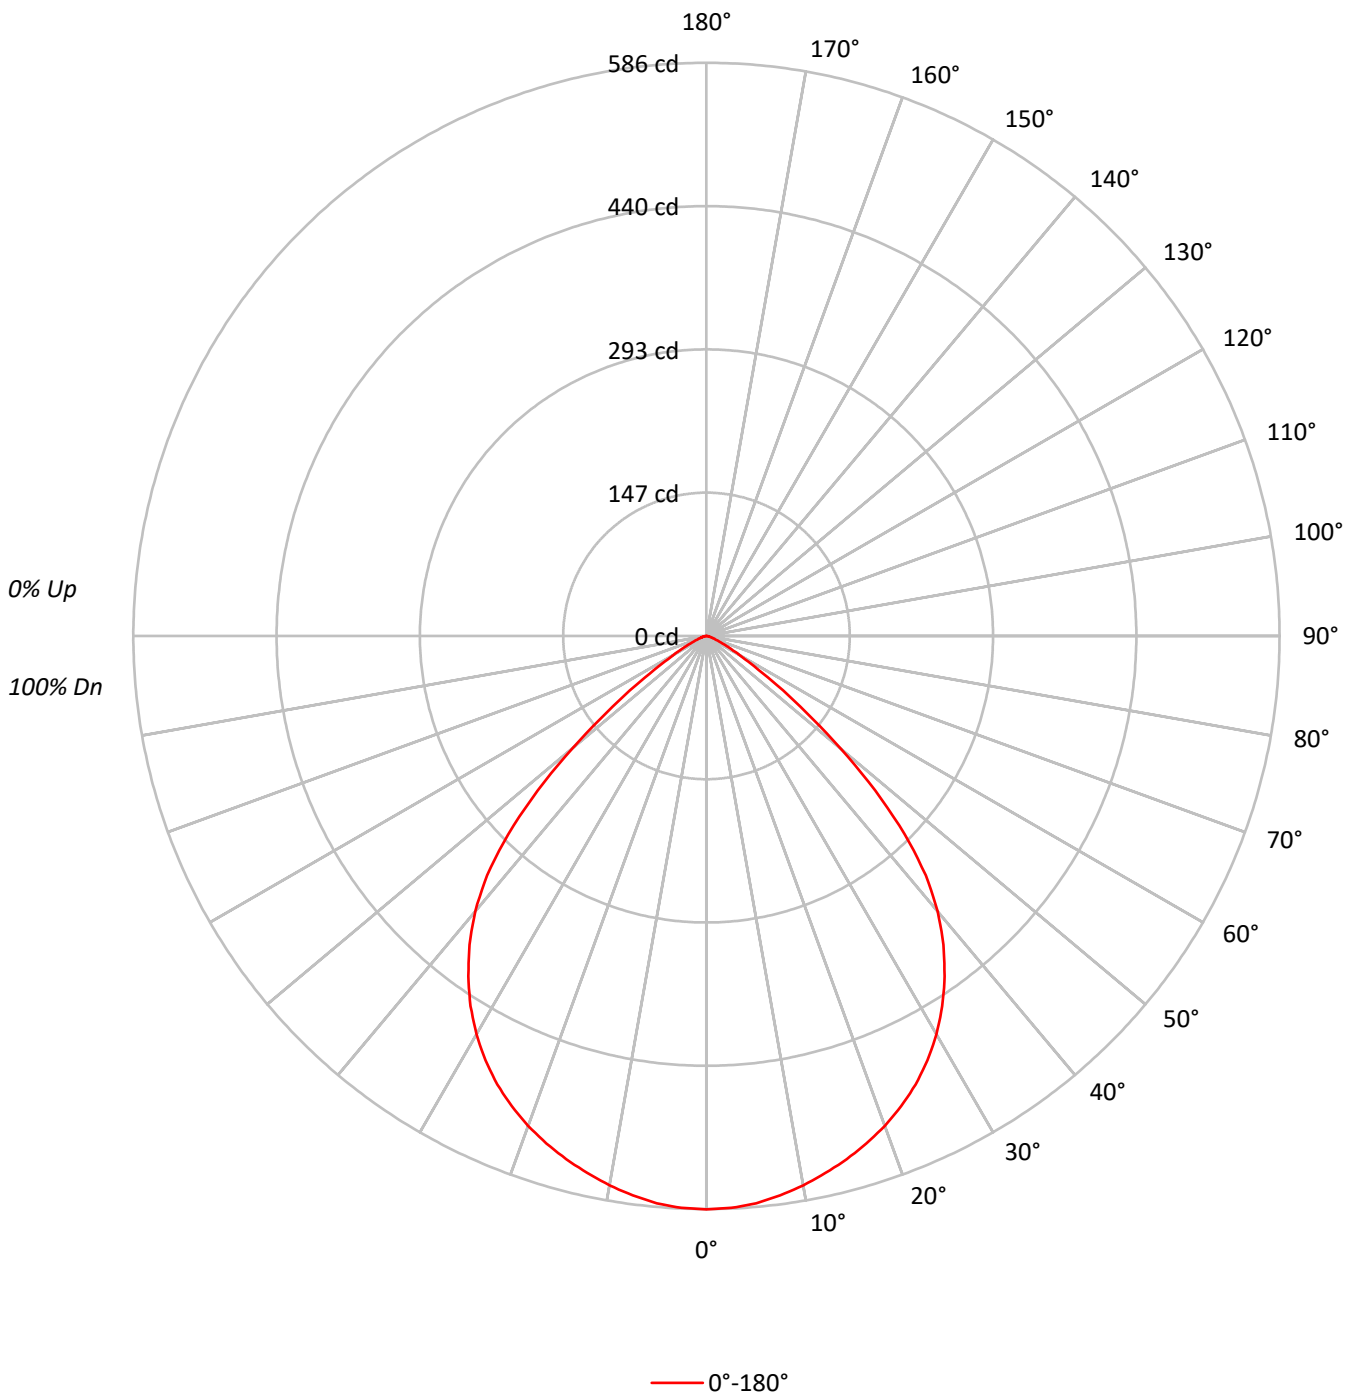



TEST NUMBER: P244920

CATALOG NUMBER: LSR8B10D010 EC8B10935 8LBS0W/MH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	107	104	101	102	100	98	99	97	95	95	94	92	91
2	105	99	94	89	102	97	92	88	94	90	86	90	87	85	88	85	83	81
3	98	90	83	78	95	88	82	78	85	80	76	83	79	75	80	77	74	72
4	91	82	75	69	89	80	74	69	78	72	68	76	71	67	74	70	66	65
5	85	74	67	62	83	73	67	61	71	65	61	70	64	60	68	63	60	58
6	79	68	61	55	77	67	60	55	66	59	55	64	58	54	63	58	54	52
7	74	63	55	50	72	62	55	50	60	54	49	59	53	49	58	53	49	47
8	69	58	50	45	68	57	50	45	56	49	45	55	49	45	54	48	45	43
9	65	53	46	41	64	53	46	41	52	45	41	51	45	41	50	45	41	39
10	61	50	43	38	60	49	42	38	48	42	38	47	42	38	46	41	37	36

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	18079
5°	18021
10°	17860
15°	17683
20°	17494
25°	17216
30°	16746
35°	15980
40°	14809
45°	12507
50°	8578
55°	4731
60°	2381
65°	1335
70°	730
75°	524
80°	337
85°	212



TEST NUMBER: P244920

CATALOG NUMBER: LSR8B10D010 EC8B10935 8LBS0WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	55.2	5.3
10°-20°	156.2	15.1
20°-30°	232.6	22.5
30°-40°	264.2	25.6
40°-50°	216.0	20.9
50°-60°	84.6	8.2
60°-70°	19.7	1.9
70°-80°	4.8	0.5
80°-90°	0.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	444.0	42.9
0°-40°	708.2	68.5
0°-60°	1008.8	97.6
0°-90°	1034.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1034.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	586	
5°	582	55
15°	554	156
25°	506	233
35°	424	264
45°	287	216
55°	88	85
65°	18	20
75°	4	5
85°	1	1
90°	0	



TEST NUMBER: P244920

CATALOG NUMBER: LSR8B10D010 EC8B10935 8LBS0WMH

CANDELA DISTRIBUTION (FULL):

	0°
0°	586.3
2.5°	585.3
5°	582.2
7.5°	576.9
10°	570.4
12.5°	562.3
15°	553.9
17.5°	544.0
20°	533.1
22.5°	520.3
25°	506.0
27.5°	489.2
30°	470.3
32.5°	448.8
35°	424.5
37.5°	397.8
40°	367.9
42.5°	331.9
45°	286.8
47.5°	233.9
50°	178.8
52.5°	128.4
55°	88.0
57.5°	57.5
60°	38.6
62.5°	26.4
65°	18.3
67.5°	12.1
70°	8.1
72.5°	5.6
75°	4.4
77.5°	3.1
80°	1.9
82.5°	0.9
85°	0.6
87.5°	0.3
90°	0.0

(END OF REPORT)