

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P245364

Luminaire Tested: **LSR8B10D010 EC8B10950 8LBS0WH**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P245364
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-15)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B10D010 EC8B10950 8LBS0WH
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
90 CRI 5000 CCT WITH WHEAT TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1118.0 lumens
Efficiency: N/A
Efficacy: 109.6 lumens/watt
Spacing Criteria (0/90/45): 1.27 / 1.27 / 1.23
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 10.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P245364

CATALOG NUMBER: LSR8B10D010 EC8B10950 8LBS0WH

Luminous Intensity Polar Plot

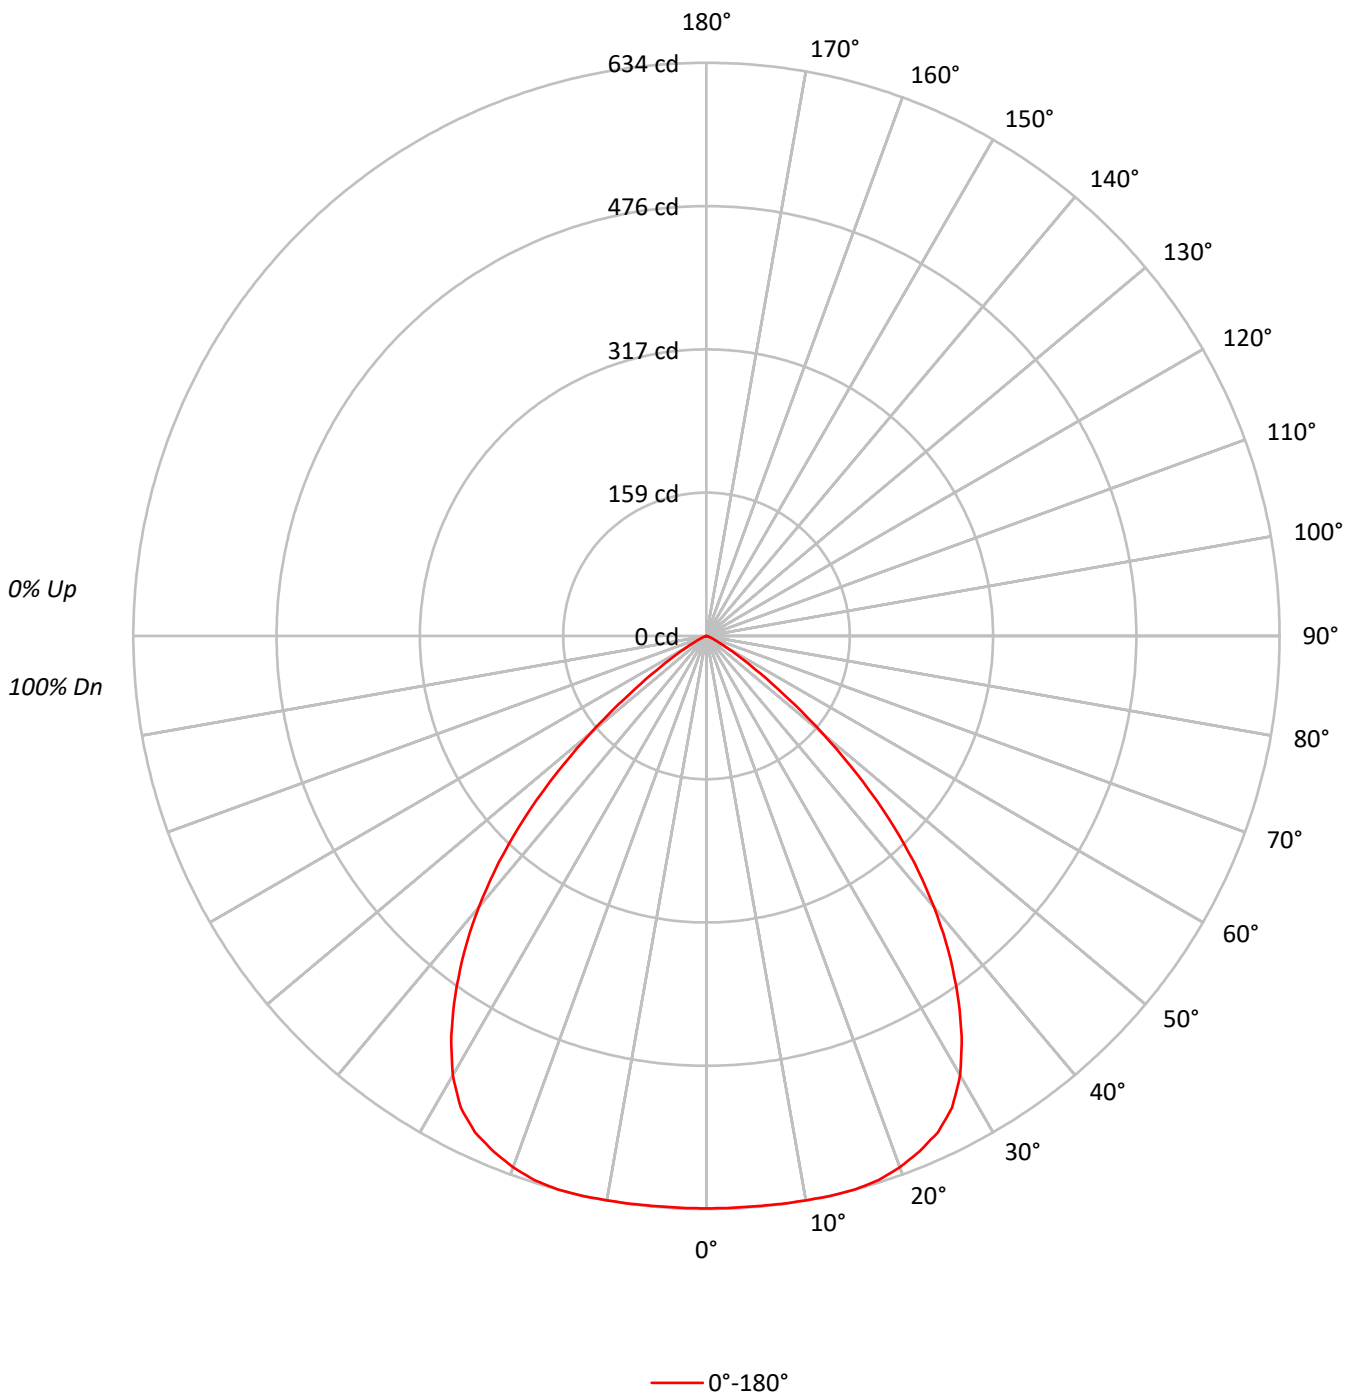



TEST NUMBER: P245364

CATALOG NUMBER: LSR8B10D010 EC8B10950 8LBS0WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	104	110	107	104	102	103	101	99		99	97	96		96	94	93	91
2	105	100	95	91	103	98	93	90	94	91	88		91	88	86		89	86	84	82
3	99	91	85	80	96	89	84	79	87	82	78		84	80	77		82	78	76	74
4	92	83	76	71	90	82	76	71	79	74	70		77	73	69		75	71	68	66
5	86	76	69	64	84	75	68	63	73	67	63		71	66	62		70	65	62	60
6	80	70	63	57	79	69	62	57	67	61	57		66	60	56		64	60	56	54
7	75	64	57	52	74	63	57	52	62	56	51		61	55	51		60	55	51	49
8	71	59	52	47	69	59	52	47	57	51	47		56	51	47		55	50	46	45
9	66	55	48	43	65	54	48	43	53	47	43		52	47	43		51	46	43	41
10	63	51	44	40	61	51	44	40	50	44	39		49	43	39		48	43	39	38

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	19526
5°	19600
10°	19849
15°	20237
20°	20526
25°	20608
30°	19979
35°	18235
40°	15776
45°	12420
50°	8011
55°	3930
60°	1616
65°	708
70°	207
75°	71
80°	53
85°	0



TEST NUMBER: P245364

CATALOG NUMBER: LSR8B10D010 EC8B10950 8LBS0WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	60.5	5.4
10°-20°	179.1	16.0
20°-30°	277.4	24.8
30°-40°	300.5	26.9
40°-50°	216.2	19.3
50°-60°	72.3	6.5
60°-70°	11.0	1.0
70°-80°	0.9	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	517.0	46.2
0°-40°	817.4	73.1
0°-60°	1106.0	98.9
0°-90°	1118.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1118.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	633	
5°	633	60
15°	634	179
25°	606	277
35°	484	300
45°	285	216
55°	73	72
65°	10	11
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P245364

CATALOG NUMBER: LSR8B10D010 EC8B10950 8LBS0WH

CANDELA DISTRIBUTION (FULL):

	0°
0°	633.2
2.5°	633.2
5°	633.2
7.5°	633.6
10°	633.9
12.5°	634.5
15°	633.9
17.5°	631.3
20°	625.5
22.5°	616.7
25°	605.7
27.5°	588.3
30°	561.1
32.5°	525.5
35°	484.4
37.5°	440.1
40°	391.9
42.5°	340.1
45°	284.8
47.5°	224.9
50°	167.0
52.5°	114.5
55°	73.1
57.5°	43.7
60°	26.2
62.5°	15.9
65°	9.7
67.5°	4.9
70°	2.3
72.5°	1.0
75°	0.6
77.5°	0.6
80°	0.3
82.5°	0.3
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)