

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P250304

Luminaire Tested: **LSR8B100D010 EC8B100835 8LBN0GPH**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P250304
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P13948)
Test Lab: INNOVATION CENTER-P1
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B100D010 EC8B100835 8LBN0GPH
Description: PORTFOLIO 8 INCH NARROW DISTRIBUTION 50 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
80 CRI 3500 CCT WITH GRAPHITE TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8817.0 lumens
Efficiency: N/A
Efficacy: 82.9 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.77
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 106.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P250304

CATALOG NUMBER: LSR8B100D010 EC8B100835 8LBN0GPH

Luminous Intensity Polar Plot

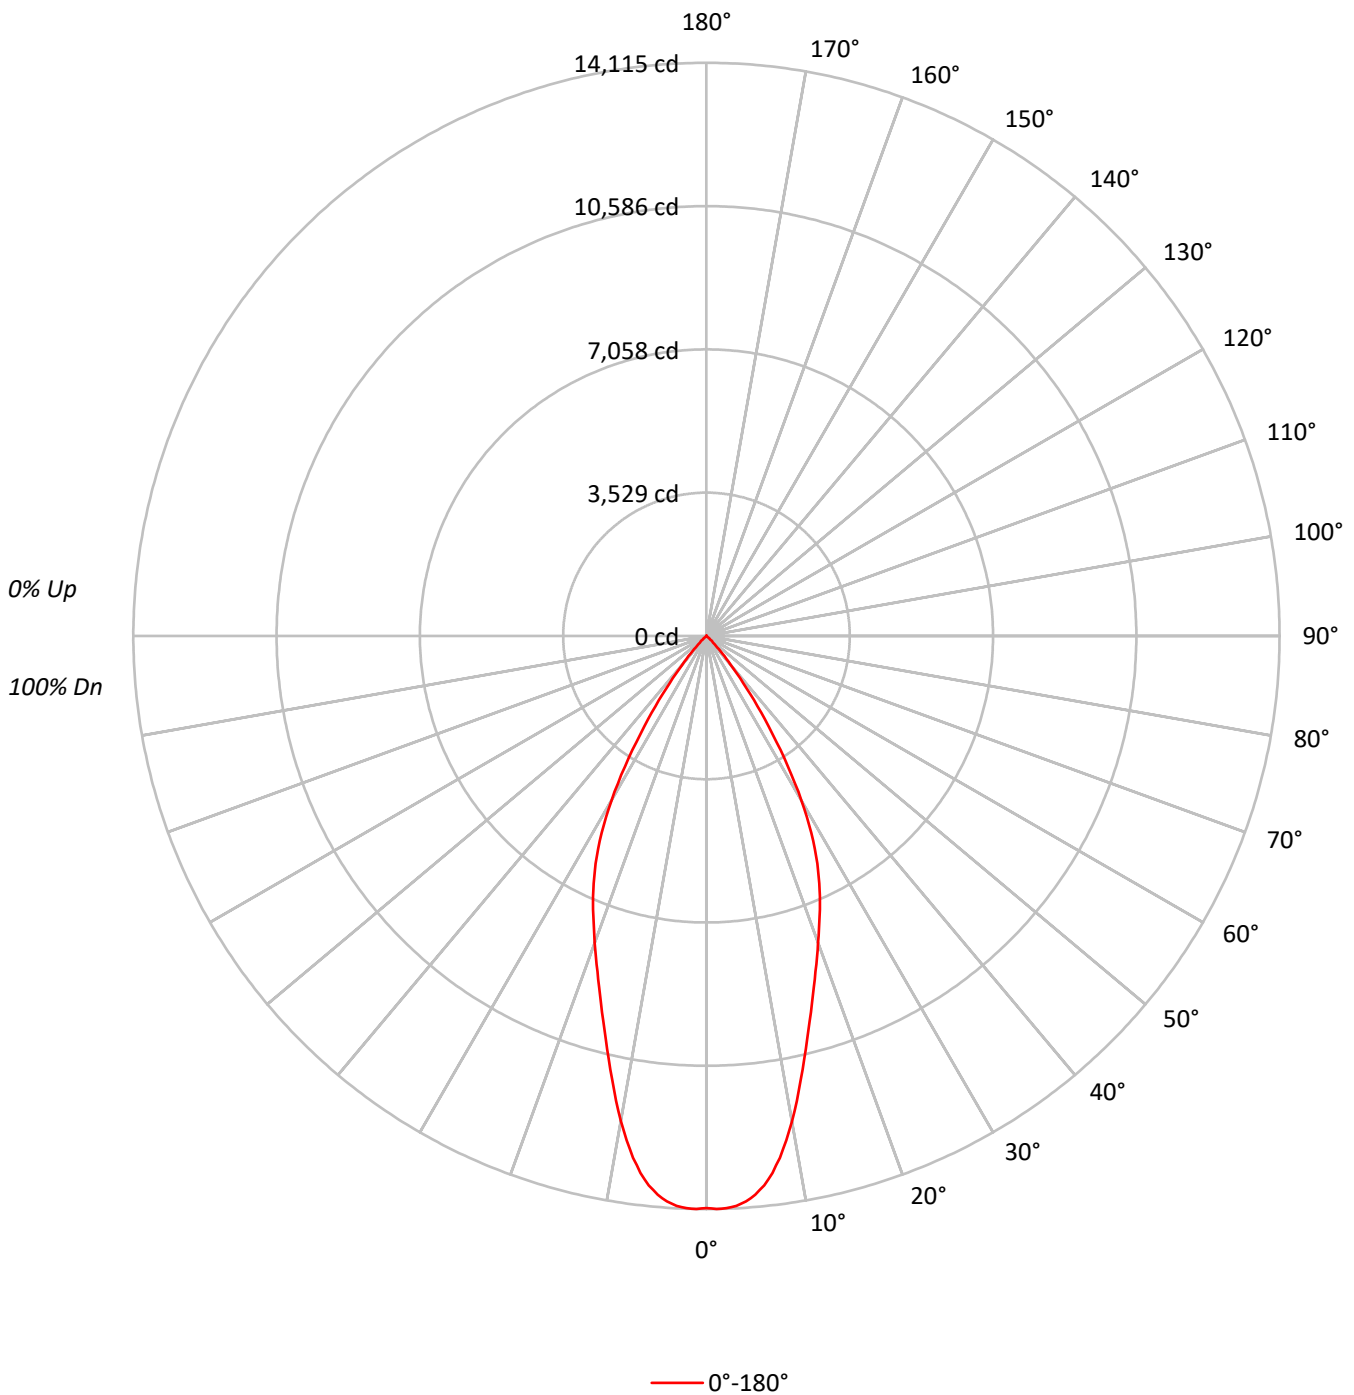



TEST NUMBER: P250304

CATALOG NUMBER: LSR8B100D010 EC8B100835 8LBN0GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	112	109	107	105	105	104	102	101	100	99	98	97	96	94
2	109	104	101	97	107	103	99	96	99	97	94	96	94	92	94	92	90	89
3	104	98	93	90	102	97	92	89	94	90	88	92	89	86	89	87	85	83
4	99	92	87	83	97	91	86	83	89	85	82	87	84	81	85	82	80	78
5	95	87	82	78	93	86	81	77	84	80	77	83	79	76	81	78	75	74
6	90	82	77	73	89	81	76	72	80	75	72	79	75	71	77	74	71	70
7	86	78	72	68	85	77	72	68	76	71	68	75	71	67	74	70	67	66
8	83	74	68	64	81	73	68	64	72	67	64	71	67	64	70	66	63	62
9	79	70	65	61	78	70	64	61	69	64	61	68	63	60	67	63	60	59
10	76	67	61	58	75	66	61	58	65	61	57	65	60	57	64	60	57	56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	434444
5°	427501
10°	379827
15°	313322
20°	263881
25°	222569
30°	166647
35°	94310
40°	37291
45°	10013
50°	1919
55°	0
60°	278
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P250304

CATALOG NUMBER: LSR8B100D010 EC8B100835 8LBN0GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1264.7	14.3
10°-20°	2748.9	31.2
20°-30°	2951.1	33.5
30°-40°	1595.0	18.1
40°-50°	248.9	2.8
50°-60°	6.8	0.1
60°-70°	1.7	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6964.7	79.0
0°-40°	8559.7	97.1
0°-60°	8815.4	100.0
0°-90°	8817.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	8817.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	14089	
5°	13811	###
15°	9815	2749
25°	6542	2951
35°	2505	1595
45°	230	249
55°	0	7
65°	0	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P250304

CATALOG NUMBER: LSR8B100D010 EC8B100835 8LBN0GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	14088.7
1°	14115.4
2°	14102.2
3°	14053.9
4°	13961.1
5°	13810.8
6°	13603.9
7°	13325.6
8°	12977.2
9°	12576.2
10°	12130.4
11°	11662.7
12°	11177.5
13°	10692.7
14°	10242.3
15°	9814.6
16°	9422.0
17°	9042.6
18°	8689.7
19°	8359.2
20°	8041.4
21°	7732.5
22°	7441.2
23°	7150.5
24°	6846.1
25°	6541.5
26°	6232.6
27°	5880.0
28°	5491.6
29°	5095.1
30°	4680.2
31°	4234.8
32°	3788.9
33°	3347.9
34°	2902.5
35°	2505.3
37.5°	1601.2
40°	926.4
42.5°	494.2
45°	229.6
47.5°	123.8
50°	40.0
52.5°	4.5
55°	0.0
57.5°	4.5



TEST NUMBER: P250304

CATALOG NUMBER: LSR8B100D010 EC8B100835 8LBN0GPH

CANDELA DISTRIBUTION (continued):

	0°
60°	4.5
62.5°	0.0
65°	0.0
67.5°	4.5
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)