

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P249947

Luminaire Tested: **LSR8B100D010 EC8B100930 8LBM0H**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P249947  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P13954)  
Test Lab: INNOVATION CENTER-P1  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LSR8B100D010 EC8B100930 8LBM0H  
Description: PORTFOLIO 8 INCH MEDIUM DISTRIBUTION 55 DEG CUTOFF RECESSED  
DOWNLIGHT- CYLINDEC  
97 CRI 3000 CCT WITH SEMI-SPECULAR CLEAR TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 8732.5 lumens  
Efficiency: N/A  
Efficacy: 82.1 lumens/watt  
Spacing Criteria (0/90/45): 0.92 / 0.92 / 0.93  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 106.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P249947

CATALOG NUMBER: LSR8B100D010 EC8B100930 8LBM0H

### Luminous Intensity Polar Plot

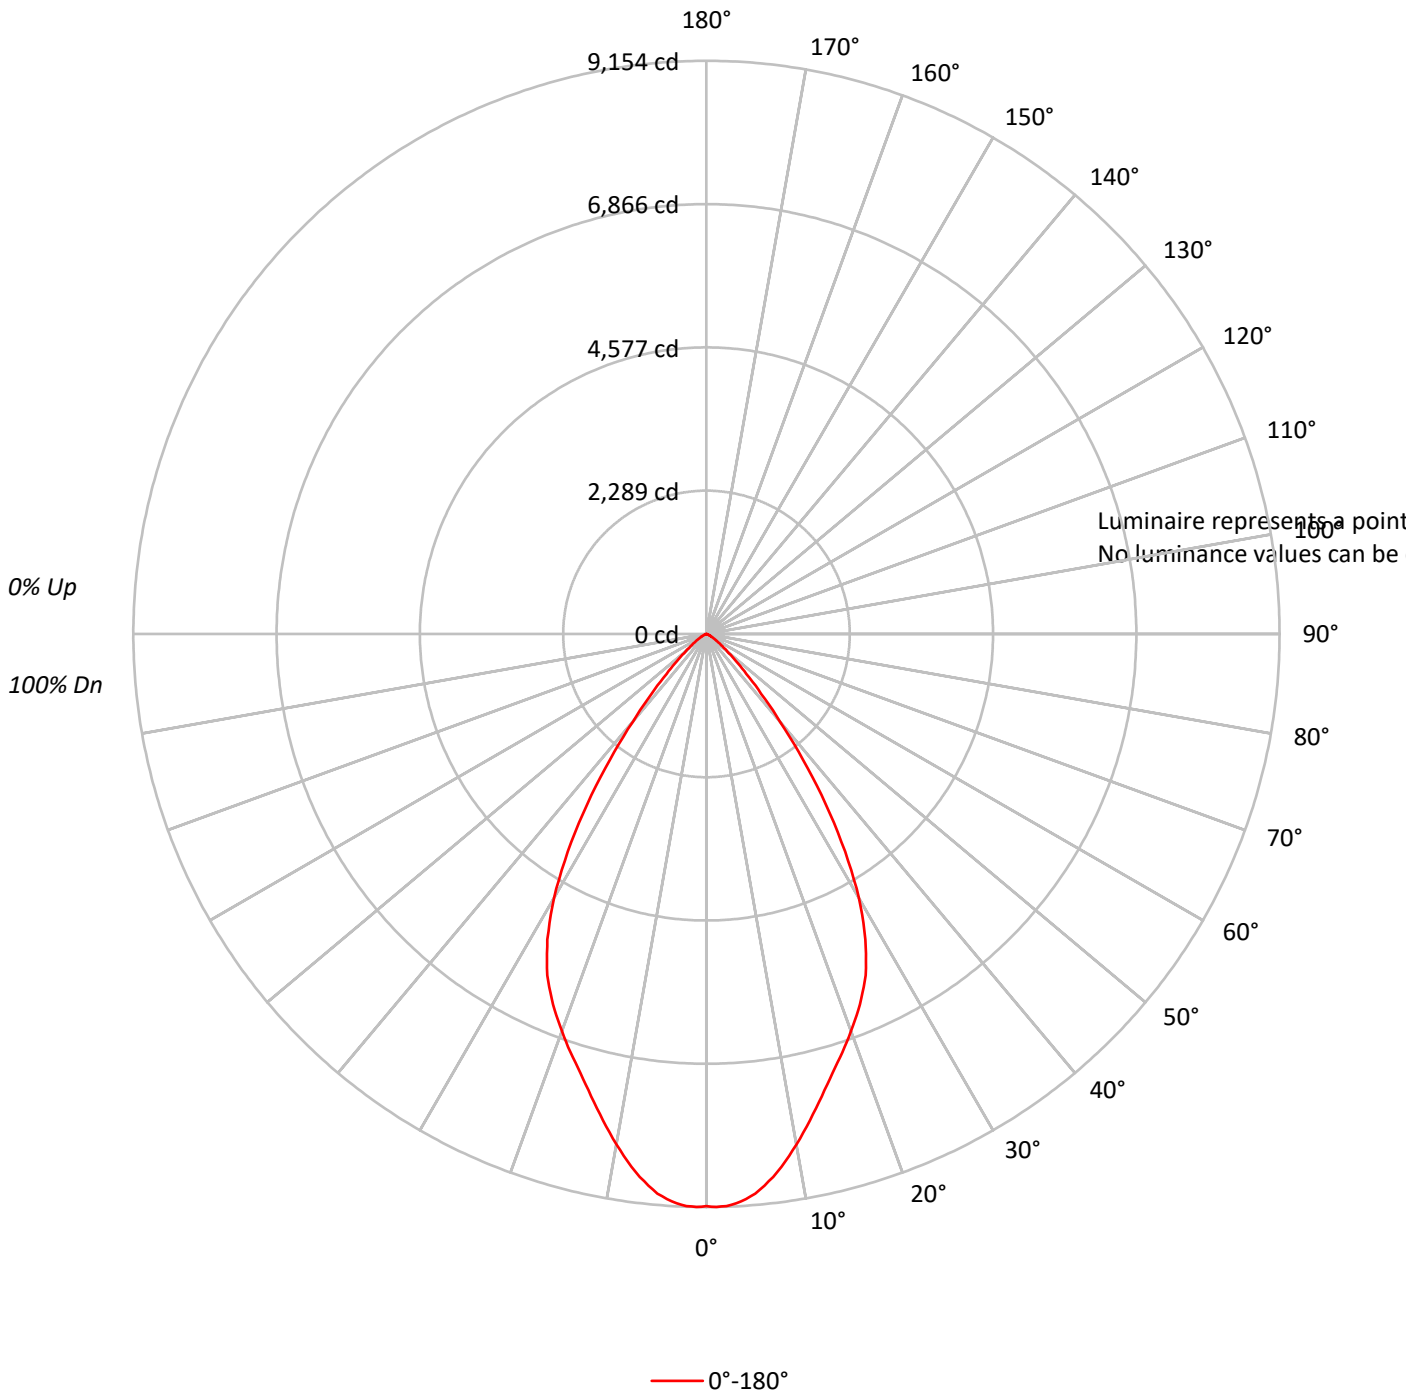



TEST NUMBER: P249947

CATALOG NUMBER: LSR8B100D010 EC8B100930 8LBM0H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	108	105	111	108	106	104	104	102	101	100	99	98	97	96	95	93
2	107	102	98	94	105	100	97	93	97	94	91	94	92	89	91	89	87	86
3	101	95	90	85	99	93	89	85	91	87	83	88	85	82	86	83	81	79
4	96	88	82	78	94	87	82	77	85	80	76	83	79	76	81	77	75	73
5	91	82	76	71	89	81	75	71	79	74	70	78	73	70	76	72	69	68
6	86	77	70	66	84	76	70	66	74	69	65	73	68	65	71	67	64	63
7	81	72	65	61	80	71	65	61	70	64	60	68	64	60	67	63	60	58
8	77	67	61	57	76	67	61	56	65	60	56	64	60	56	63	59	56	54
9	73	63	57	53	72	63	57	53	62	56	53	61	56	52	60	55	52	51
10	70	60	53	49	69	59	53	49	58	53	49	57	53	49	57	52	49	48

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P249947

CATALOG NUMBER: LSR8B100D010 EC8B100930 8LBM0H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	833.3	9.5
10°-20°	2096.5	24.0
20°-30°	2721.7	31.2
30°-40°	2054.3	23.5
40°-50°	751.7	8.6
50°-60°	210.1	2.4
60°-70°	55.2	0.6
70°-80°	9.3	0.1
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5651.6	64.7
0°-40°	7705.9	88.2
0°-60°	8667.7	99.3
0°-90°	8732.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	8732.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	9140	
5°	8971	833
15°	7452	2097
25°	6016	2722
35°	3317	2054
45°	902	752
55°	215	210
65°	52	55
75°	8	9
85°	0	0
90°	0	



TEST NUMBER: P249947

CATALOG NUMBER: LSR8B100D010 EC8B100930 8LBM0H

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	9140.2
1°	9153.9
2°	9143.0
3°	9107.6
4°	9047.6
5°	8971.4
6°	8859.7
7°	8737.2
8°	8595.5
9°	8440.2
10°	8276.9
11°	8113.5
12°	7944.6
13°	7773.0
14°	7609.6
15°	7451.6
16°	7301.9
17°	7157.5
18°	7026.8
19°	6890.6
20°	6751.7
22.5°	6405.7
25°	6016.3
27.5°	5501.5
30°	4875.1
32.5°	4120.7
35°	3317.3
37.5°	2532.9
40°	1827.5
42.5°	1293.6
45°	901.5
47.5°	634.6
50°	427.5
52.5°	313.2
55°	215.1
57.5°	155.3
60°	103.5
62.5°	76.2
65°	51.8
67.5°	35.4
70°	19.1
72.5°	13.6
75°	8.2
77.5°	2.7
80°	2.7



TEST NUMBER: P249947

CATALOG NUMBER: LSR8B100D010 EC8B100930 8LBM0H

**CANDELA DISTRIBUTION (continued):**

	0°
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)