

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P250437

Luminaire Tested: **LSR8B100D010 EC8B100950 8LBN0B**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P250437
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P13948)
Test Lab: INNOVATION CENTER-P1
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B100D010 EC8B100950 8LBN0B
Description: PORTFOLIO 8 INCH NARROW DISTRIBUTION 50 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
90 CRI 5000 CCT WITH SPECULAR BLACK TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5923.0 lumens
Efficiency: N/A
Efficacy: 55.7 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.77
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 106.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P250437

CATALOG NUMBER: LSR8B100D010 EC8B100950 8LBN0B

Luminous Intensity Polar Plot

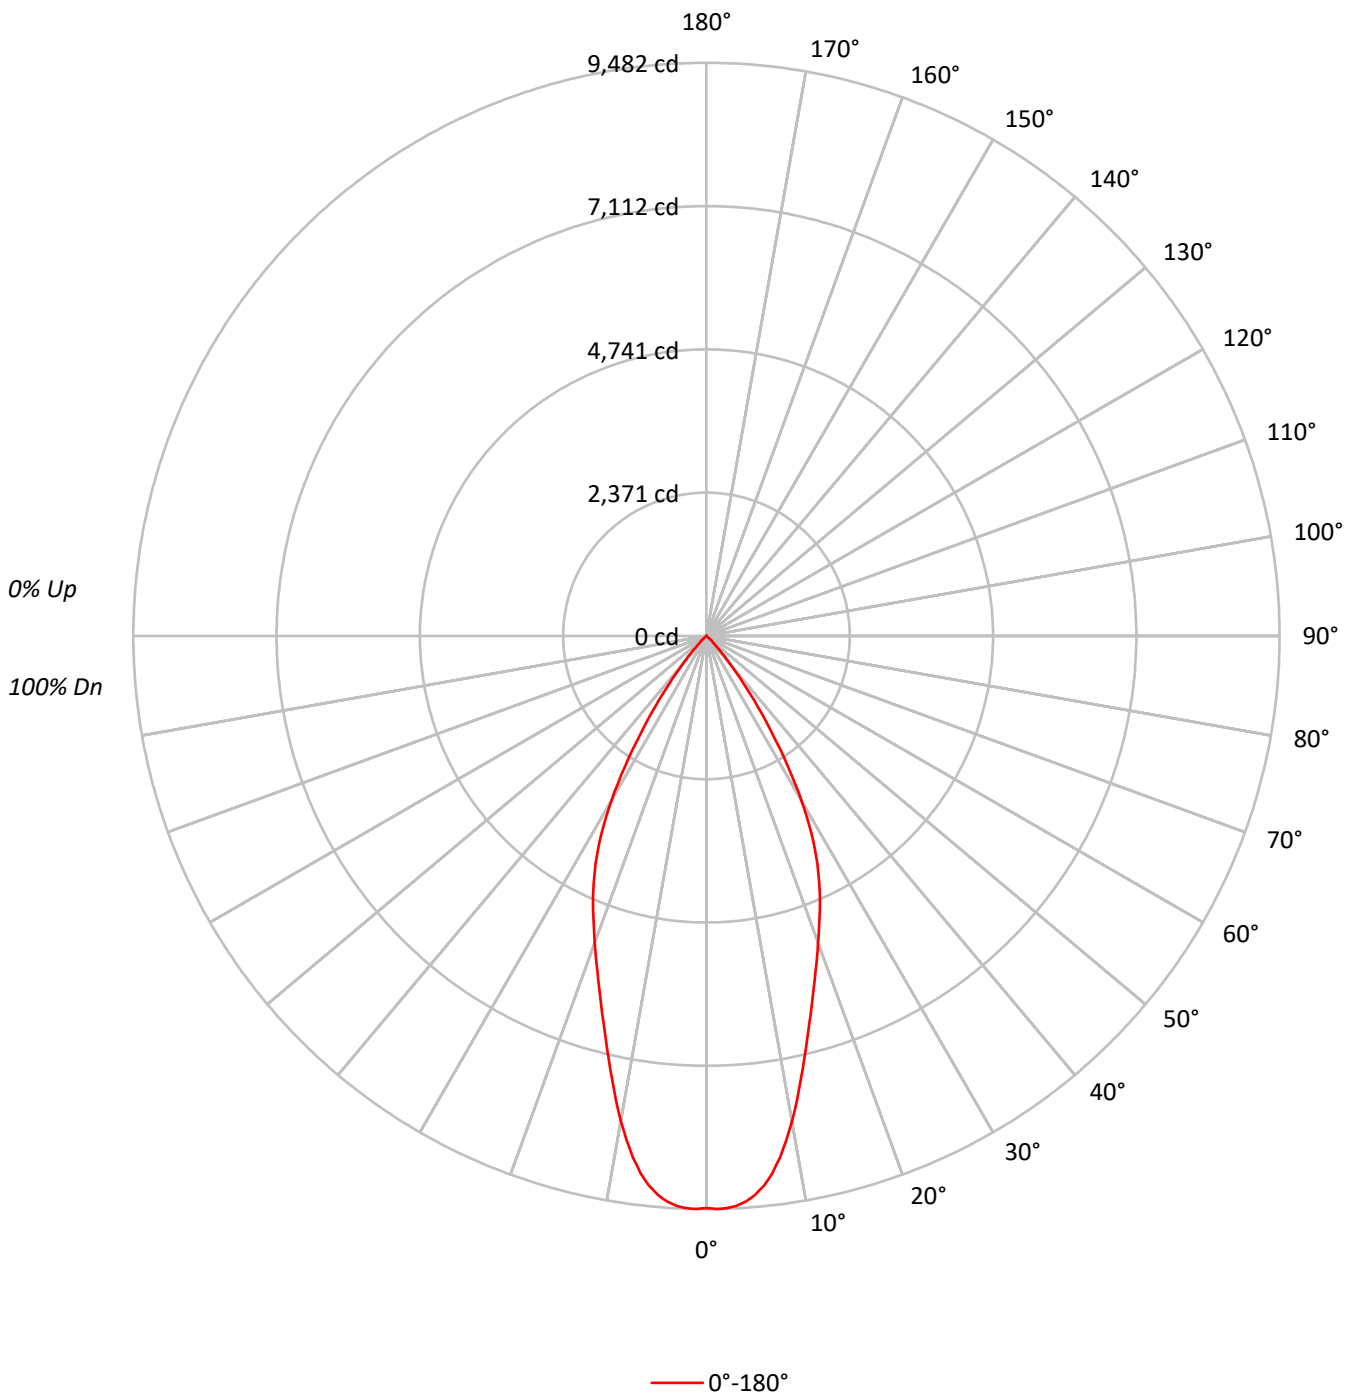



TEST NUMBER: P250437

CATALOG NUMBER: LSR8B100D010 EC8B100950 8LBN0B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	112	109	107	105	105	104	102	101	100	99	98	97	96	94
2	109	104	101	97	107	103	99	96	99	97	94	96	94	92	94	92	90	89
3	104	98	93	90	102	97	92	89	94	90	88	92	89	86	89	87	85	83
4	99	92	87	83	97	91	86	83	89	85	82	87	84	81	85	82	80	78
5	95	87	82	78	93	86	81	77	84	80	77	83	79	76	81	78	75	74
6	90	82	77	73	89	81	76	72	80	75	72	79	75	71	77	74	71	70
7	86	78	72	68	85	77	72	68	76	71	68	75	71	67	74	70	67	66
8	83	74	68	64	81	73	68	64	72	67	64	71	67	64	70	66	63	62
9	79	70	65	61	78	70	64	61	69	64	61	68	63	60	67	63	60	59
10	76	67	61	58	75	66	61	58	65	61	57	65	60	57	64	60	57	56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	291847
5°	287183
10°	255155
15°	210482
20°	177268
25°	149516
30°	111947
35°	63355
40°	25050
45°	6725
50°	1290
55°	0
60°	185
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P250437

CATALOG NUMBER: LSR8B100D010 EC8B100950 8LBN0B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	849.6	14.3
10°-20°	1846.6	31.2
20°-30°	1982.5	33.5
30°-40°	1071.5	18.1
40°-50°	167.2	2.8
50°-60°	4.6	0.1
60°-70°	1.1	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4678.7	79.0
0°-40°	5750.1	97.1
0°-60°	5921.9	100.0
0°-90°	5923.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5923.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	9464	
5°	9278	850
15°	6593	1847
25°	4394	1982
35°	1683	1071
45°	154	167
55°	0	5
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P250437

CATALOG NUMBER: LSR8B100D010 EC8B100950 8LBN0B

CANDELA DISTRIBUTION (FULL):

0°	
0°	9464.4
1°	9482.3
2°	9473.4
3°	9441.0
4°	9378.7
5°	9277.7
6°	9138.7
7°	8951.8
8°	8717.7
9°	8448.4
10°	8148.8
11°	7834.6
12°	7508.7
13°	7183.0
14°	6880.5
15°	6593.2
16°	6329.4
17°	6074.5
18°	5837.5
19°	5615.5
20°	5402.0
21°	5194.5
22°	4998.8
23°	4803.5
24°	4599.0
25°	4394.4
26°	4186.9
27°	3950.0
28°	3689.1
29°	3422.7
30°	3144.0
31°	2844.8
32°	2545.2
33°	2249.0
34°	1949.8
35°	1683.0
37.5°	1075.6
40°	622.3
42.5°	332.0
45°	154.2
47.5°	83.1
50°	26.9
52.5°	3.0
55°	0.0
57.5°	3.0



TEST NUMBER: P250437

CATALOG NUMBER: LSR8B100D010 EC8B100950 8LBN0B

CANDELA DISTRIBUTION (continued):

	0°
60°	3.0
62.5°	0.0
65°	0.0
67.5°	3.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)