

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P249940

Luminaire Tested: **LSR8B100D010 EC8B1009727 8LBM0H**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P249940  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P13954)  
Test Lab: INNOVATION CENTER-P1  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LSR8B100D010 EC8B1009727 8LBM0H  
Description: PORTFOLIO 8 INCH MEDIUM DISTRIBUTION 55 DEG CUTOFF RECESSED  
DOWNLIGHT- CYLINDEC  
97 CRI 2700 CCT WITH SEMI-SPECULAR CLEAR TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7363.0 lumens  
Efficiency: N/A  
Efficacy: 69.3 lumens/watt  
Spacing Criteria (0/90/45): 0.92 / 0.92 / 0.93  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 106.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P249940

CATALOG NUMBER: LSR8B100D010 EC8B1009727 8LBM0H

### Luminous Intensity Polar Plot

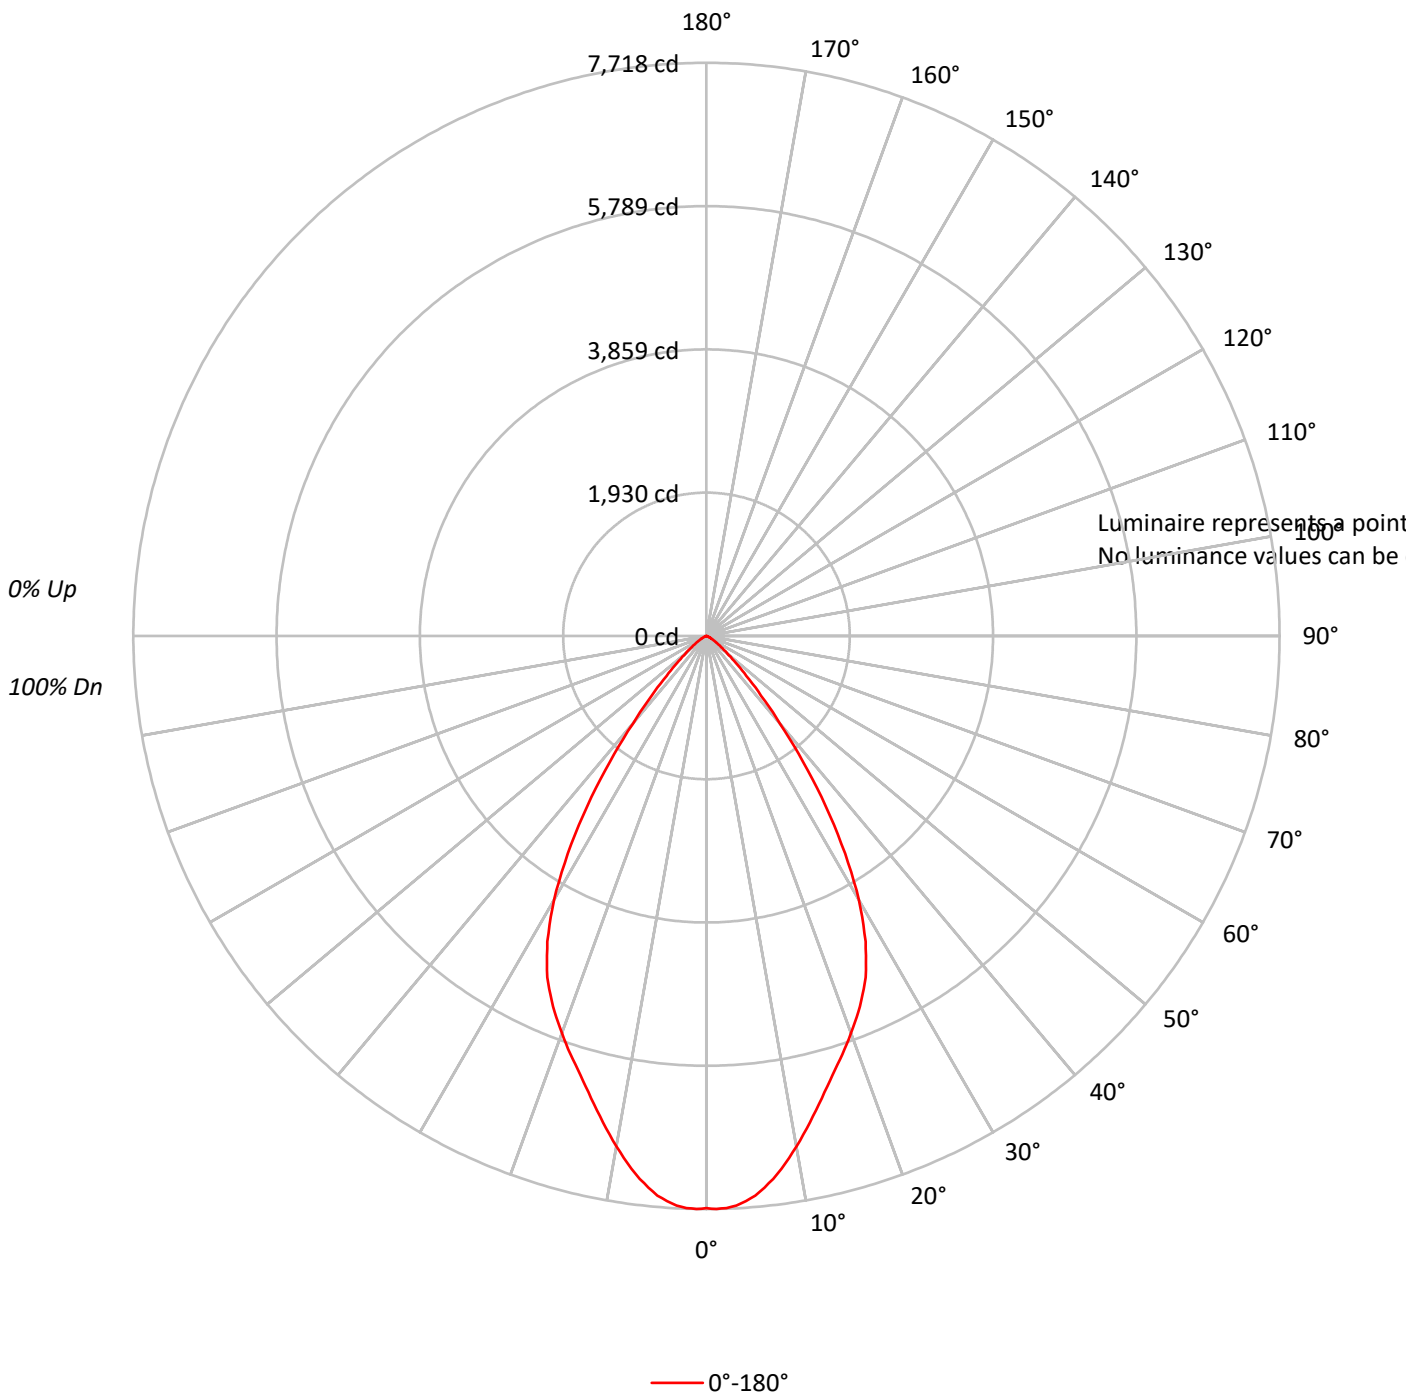



TEST NUMBER: P249940

CATALOG NUMBER: LSR8B100D010 EC8B1009727 8LBM0H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	110	108	105	111	108	106	104	104	102	101		100	99	98		97	96	95	93
2	107	102	98	94	105	100	97	93	97	94	91		94	92	89		91	89	87	86
3	101	95	90	85	99	93	89	85	91	87	83		88	85	82		86	83	81	79
4	96	88	82	78	94	87	82	77	85	80	76		83	79	76		81	77	75	73
5	91	82	76	71	89	81	75	71	79	74	70		78	73	70		76	72	69	68
6	86	77	70	66	84	76	70	66	74	69	65		73	68	65		71	67	64	63
7	81	72	65	61	80	71	65	61	70	64	60		68	64	60		67	63	60	58
8	77	67	61	57	76	67	61	56	65	60	56		64	60	56		63	59	56	54
9	73	63	57	53	72	63	57	53	62	56	53		61	56	52		60	55	52	51
10	70	60	53	49	69	59	53	49	58	53	49		57	53	49		57	52	49	48

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P249940

CATALOG NUMBER: LSR8B100D010 EC8B1009727 8LBM0H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	702.6	9.5
10°-20°	1767.7	24.0
20°-30°	2294.9	31.2
30°-40°	1732.1	23.5
40°-50°	633.8	8.6
50°-60°	177.2	2.4
60°-70°	46.6	0.6
70°-80°	7.8	0.1
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4765.2	64.7
0°-40°	6497.3	88.2
0°-60°	7308.3	99.3
0°-90°	7363.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7363.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	7707	
5°	7564	703
15°	6283	1768
25°	5073	2295
35°	2797	1732
45°	760	634
55°	181	177
65°	44	47
75°	7	8
85°	0	0
90°	0	



TEST NUMBER: P249940

CATALOG NUMBER: LSR8B100D010 EC8B1009727 8LBM0H

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	7706.7
1°	7718.2
2°	7709.0
3°	7679.1
4°	7628.6
5°	7564.3
6°	7470.2
7°	7366.8
8°	7247.4
9°	7116.5
10°	6978.7
11°	6841.0
12°	6698.6
13°	6553.9
14°	6416.1
15°	6282.9
16°	6156.6
17°	6034.9
18°	5924.7
19°	5809.9
20°	5692.8
22.5°	5401.1
25°	5072.7
27.5°	4638.7
30°	4110.5
32.5°	3474.4
35°	2797.0
37.5°	2135.6
40°	1540.9
42.5°	1090.8
45°	760.1
47.5°	535.1
50°	360.5
52.5°	264.1
55°	181.4
57.5°	130.9
60°	87.3
62.5°	64.3
65°	43.6
67.5°	29.9
70°	16.1
72.5°	11.5
75°	6.9
77.5°	2.3
80°	2.3



TEST NUMBER: P249940

CATALOG NUMBER: LSR8B100D010 EC8B1009727 8LBM0H

**CANDELA DISTRIBUTION (continued):**

	0°
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)