

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P247005

Luminaire Tested: **LSR8B120D010 EC8B120830 8LBN0LI**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P247005  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-80)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LSR8B120D010 EC8B120830 8LBN0LI  
Description: PORTFOLIO 8 INCH NARROW DISTRIBUTION 50 DEGREE CUTOFF RECESSED  
DOWNLIGHT- CYLINDEC  
80 CRI 3000 CCT WITH SPECULAR CLEAR TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 11288.0 lumens  
Efficiency: N/A  
Efficacy: 95.4 lumens/watt  
Spacing Criteria (0/90/45): 0.47 / 0.47 / 0.56  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 118.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P247005

CATALOG NUMBER: LSR8B120D010 EC8B120830 8LBN0LI

### Luminous Intensity Polar Plot

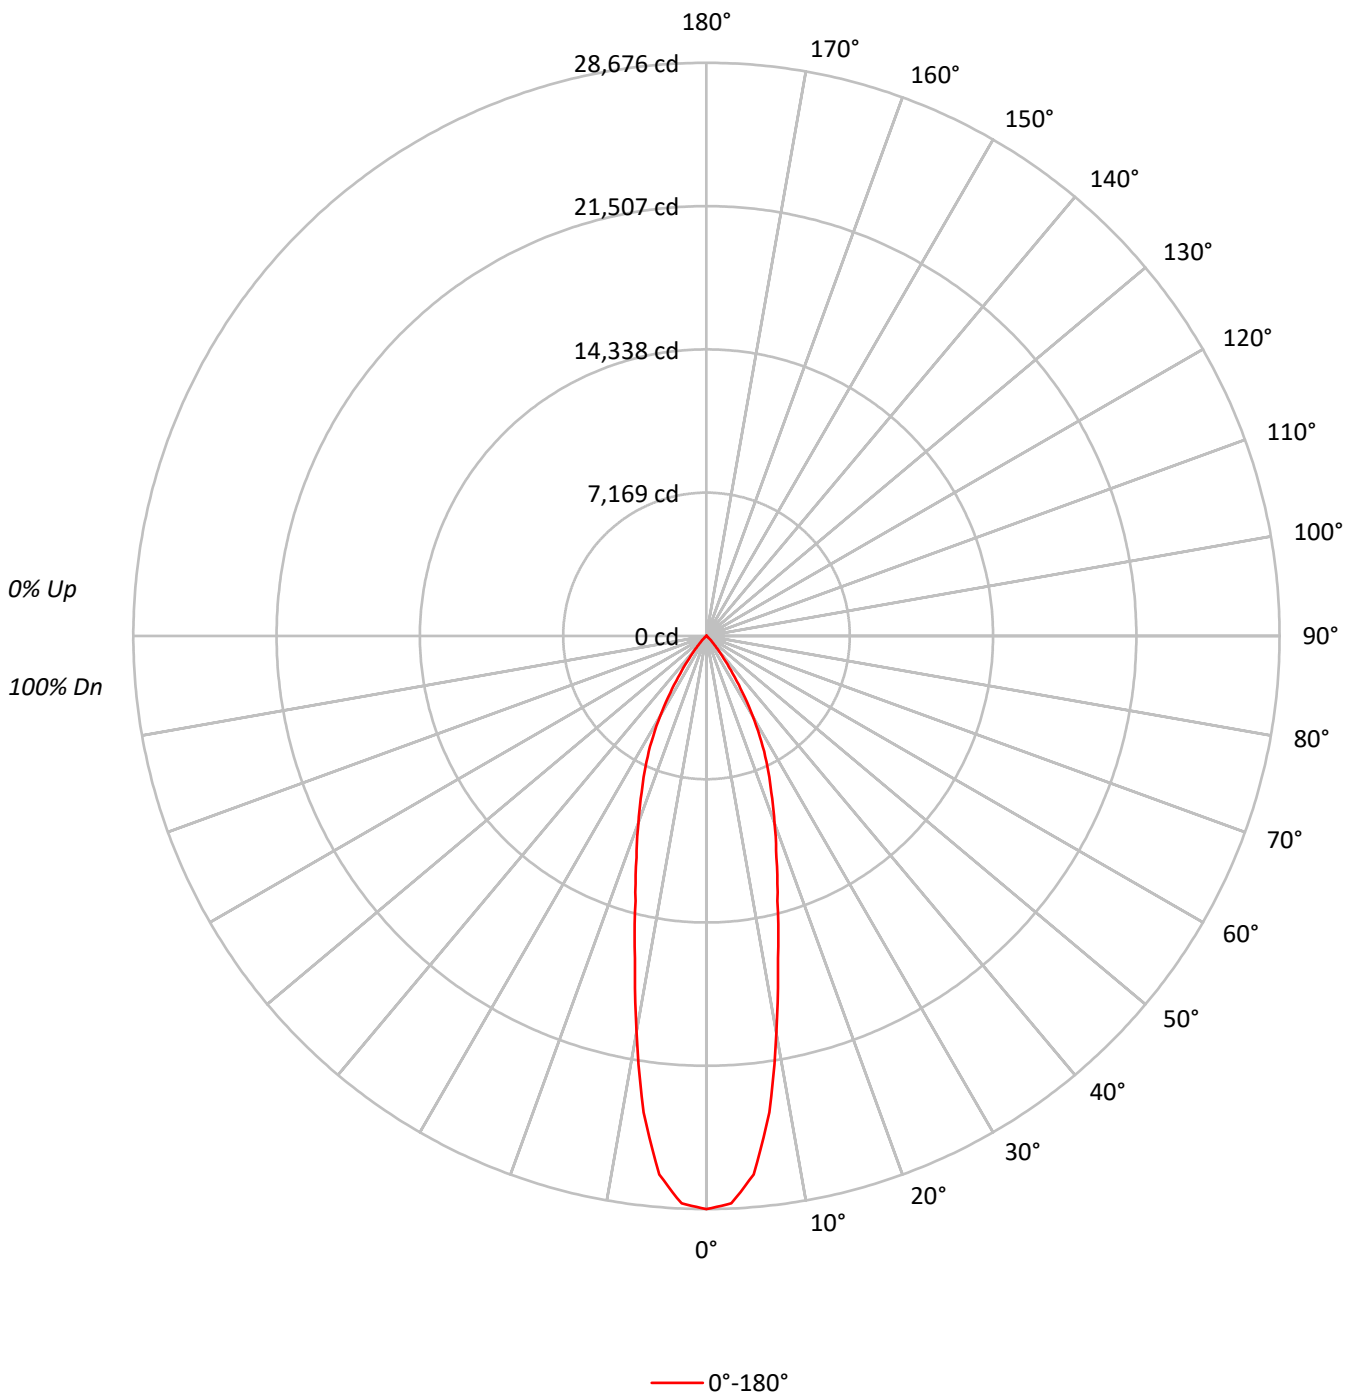



TEST NUMBER: P247005

CATALOG NUMBER: LSR8B120D010 EC8B120830 8LBN0LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95
2	110	105	102	99	107	104	100	98	100	98	96	98	95	94	95	93	92	90	90	90
3	105	100	95	92	103	98	94	91	96	92	90	93	91	88	91	89	87	85	85	85
4	101	94	90	86	99	93	89	85	91	87	84	89	86	83	87	85	83	81	81	81
5	97	90	85	81	95	89	84	80	87	83	80	85	82	79	84	81	78	77	77	77
6	93	85	80	76	91	84	80	76	83	79	76	82	78	75	80	77	75	73	73	73
7	89	81	76	72	88	81	76	72	79	75	72	78	74	72	77	74	71	70	70	70
8	86	78	72	69	85	77	72	69	76	72	69	75	71	68	74	71	68	67	67	67
9	82	74	69	66	81	74	69	66	73	69	65	72	68	65	71	68	65	64	64	64
10	79	71	66	63	79	71	66	63	70	66	63	69	65	62	69	65	62	61	61	61

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	884259
5°	837209
10°	630521
15°	438257
20°	326703
25°	245906
30°	164435
35°	86070
40°	33246
45°	12293
50°	3128
55°	608
60°	86
65°	306
70°	379
75°	0
80°	0
85°	495



TEST NUMBER: P247005

CATALOG NUMBER: LSR8B120D010 EC8B120830 8LBN0LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	2351.8	20.8
10°-20°	3889.4	34.5
20°-30°	3279.0	29.0
30°-40°	1487.9	13.2
40°-50°	259.8	2.3
50°-60°	14.1	0.1
60°-70°	2.1	0.0
70°-80°	2.4	0.0
80°-90°	1.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	9520.2	84.3
0°-40°	11008.1	97.5
0°-60°	11282.0	99.9
0°-90°	11288.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	11288.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	28676	
5°	27047	###
15°	13728	3889
25°	7227	3279
35°	2286	1488
45°	282	260
55°	11	14
65°	4	2
75°	0	2
85°	1	2
90°	0	



TEST NUMBER: P247005

CATALOG NUMBER: LSR8B120D010 EC8B120830 8LBN0LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	28675.9
2.5°	28422.3
5°	27046.8
7.5°	24050.8
10°	20136.7
12.5°	16518.8
15°	13728.1
17.5°	11631.6
20°	9955.8
22.5°	8481.1
25°	7227.4
27.5°	5952.5
30°	4618.1
32.5°	3361.6
35°	2286.4
37.5°	1403.8
40°	825.9
42.5°	484.5
45°	281.9
47.5°	168.6
50°	65.2
52.5°	9.9
55°	11.3
57.5°	9.9
60°	1.4
62.5°	1.4
65°	4.2
67.5°	0.0
70°	4.2
72.5°	7.1
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	1.4
87.5°	4.2
90°	0.0

(END OF REPORT)