

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P247037

Luminaire Tested: **LSR8B120D010 EC8B120950 8LBNOLI**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P247037
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-80)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B120D010 EC8B120950 8LBN0LI
Description: PORTFOLIO 8 INCH NARROW DISTRIBUTION 50 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
90 CRI 5000 CCT WITH SPECULAR CLEAR TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 10824.0 lumens
Efficiency: N/A
Efficacy: 91.5 lumens/watt
Spacing Criteria (0/90/45): 0.47 / 0.47 / 0.56
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 118.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P247037

CATALOG NUMBER: LSR8B120D010 EC8B120950 8LBN0LI

Luminous Intensity Polar Plot

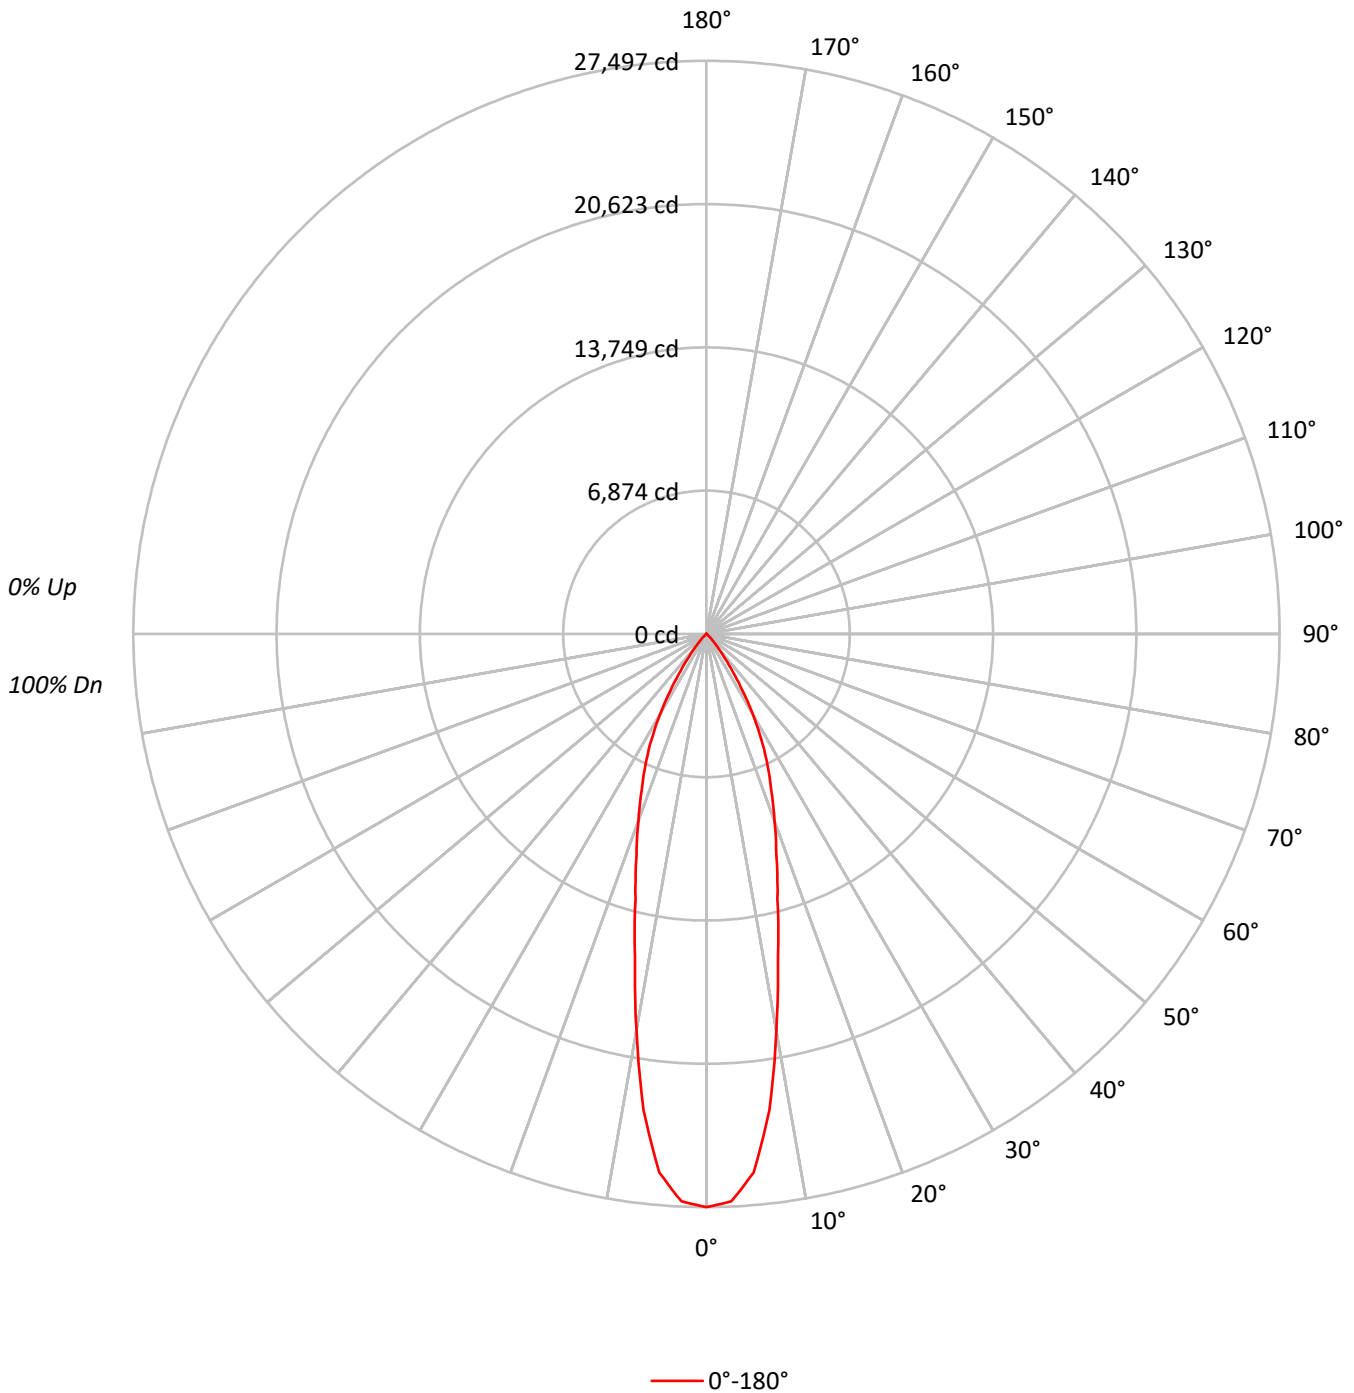



TEST NUMBER: P247037

CATALOG NUMBER: LSR8B120D010 EC8B120950 8LBN0LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95
2	110	105	102	99	107	104	100	98	100	98	96	98	95	94	95	93	92	90
3	105	100	95	92	103	98	94	91	96	92	90	93	91	88	91	89	87	85
4	101	94	90	86	99	93	89	85	91	87	84	89	86	83	87	85	83	81
5	97	90	85	81	95	89	84	80	87	83	80	85	82	79	84	81	78	77
6	93	85	80	76	91	84	80	76	83	79	76	82	78	75	80	77	75	73
7	89	81	76	72	88	81	76	72	79	75	72	78	74	72	77	74	71	70
8	86	78	72	69	85	77	72	69	76	72	69	75	71	68	74	71	68	67
9	82	74	69	66	81	74	69	66	73	69	65	72	68	65	71	68	65	64
10	79	71	66	63	79	71	66	63	70	66	63	69	65	62	69	65	62	61

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	847912
5°	802798
10°	604604
15°	420242
20°	313271
25°	235797
30°	157674
35°	82531
40°	31877
45°	11788
50°	2998
55°	586
60°	86
65°	299
70°	370
75°	0
80°	0
85°	495



TEST NUMBER: P247037

CATALOG NUMBER: LSR8B120D010 EC8B120950 8LBN0LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	2255.2	20.8
10°-20°	3729.5	34.5
20°-30°	3144.2	29.0
30°-40°	1426.7	13.2
40°-50°	249.1	2.3
50°-60°	13.6	0.1
60°-70°	2.1	0.0
70°-80°	2.3	0.0
80°-90°	1.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	9128.8	84.3
0°-40°	10555.6	97.5
0°-60°	10818.2	99.9
0°-90°	10824.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	10824.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	27497	
5°	25935	###
15°	13164	3730
25°	6930	3144
35°	2192	1427
45°	270	249
55°	11	14
65°	4	2
75°	0	2
85°	1	2
90°	0	



TEST NUMBER: P247037

CATALOG NUMBER: LSR8B120D010 EC8B120950 8LBN0LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	27497.2
2.5°	27254.0
5°	25935.1
7.5°	23062.1
10°	19309.0
12.5°	15839.8
15°	13163.8
17.5°	11153.4
20°	9546.5
22.5°	8132.5
25°	6930.3
27.5°	5707.8
30°	4428.2
32.5°	3223.4
35°	2192.4
37.5°	1346.1
40°	791.9
42.5°	464.6
45°	270.3
47.5°	161.6
50°	62.5
52.5°	9.5
55°	10.9
57.5°	9.5
60°	1.4
62.5°	1.4
65°	4.1
67.5°	0.0
70°	4.1
72.5°	6.8
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	1.4
87.5°	4.1
90°	0.0

(END OF REPORT)