

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P250620

Luminaire Tested: **LSR8B120D010 EC8B1209730 8LBM0B**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P250620  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P13928)  
Test Lab: INNOVATION CENTER-P1  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LSR8B120D010 EC8B1209730 8LBM0B  
Description: PORTFOLIO 8 INCH MEDIUM DISTRIBUTION 55 DEG CUTOFF RECESSED  
DOWNLIGHT- CYLINDEC  
97 CRI 3000 CCT WITH SPECULAR BLACK TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5790.0 lumens  
Efficiency: N/A  
Efficacy: 48.9 lumens/watt  
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.87  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 118.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P250620

CATALOG NUMBER: LSR8B120D010 EC8B1209730 8LBM0B

### Luminous Intensity Polar Plot

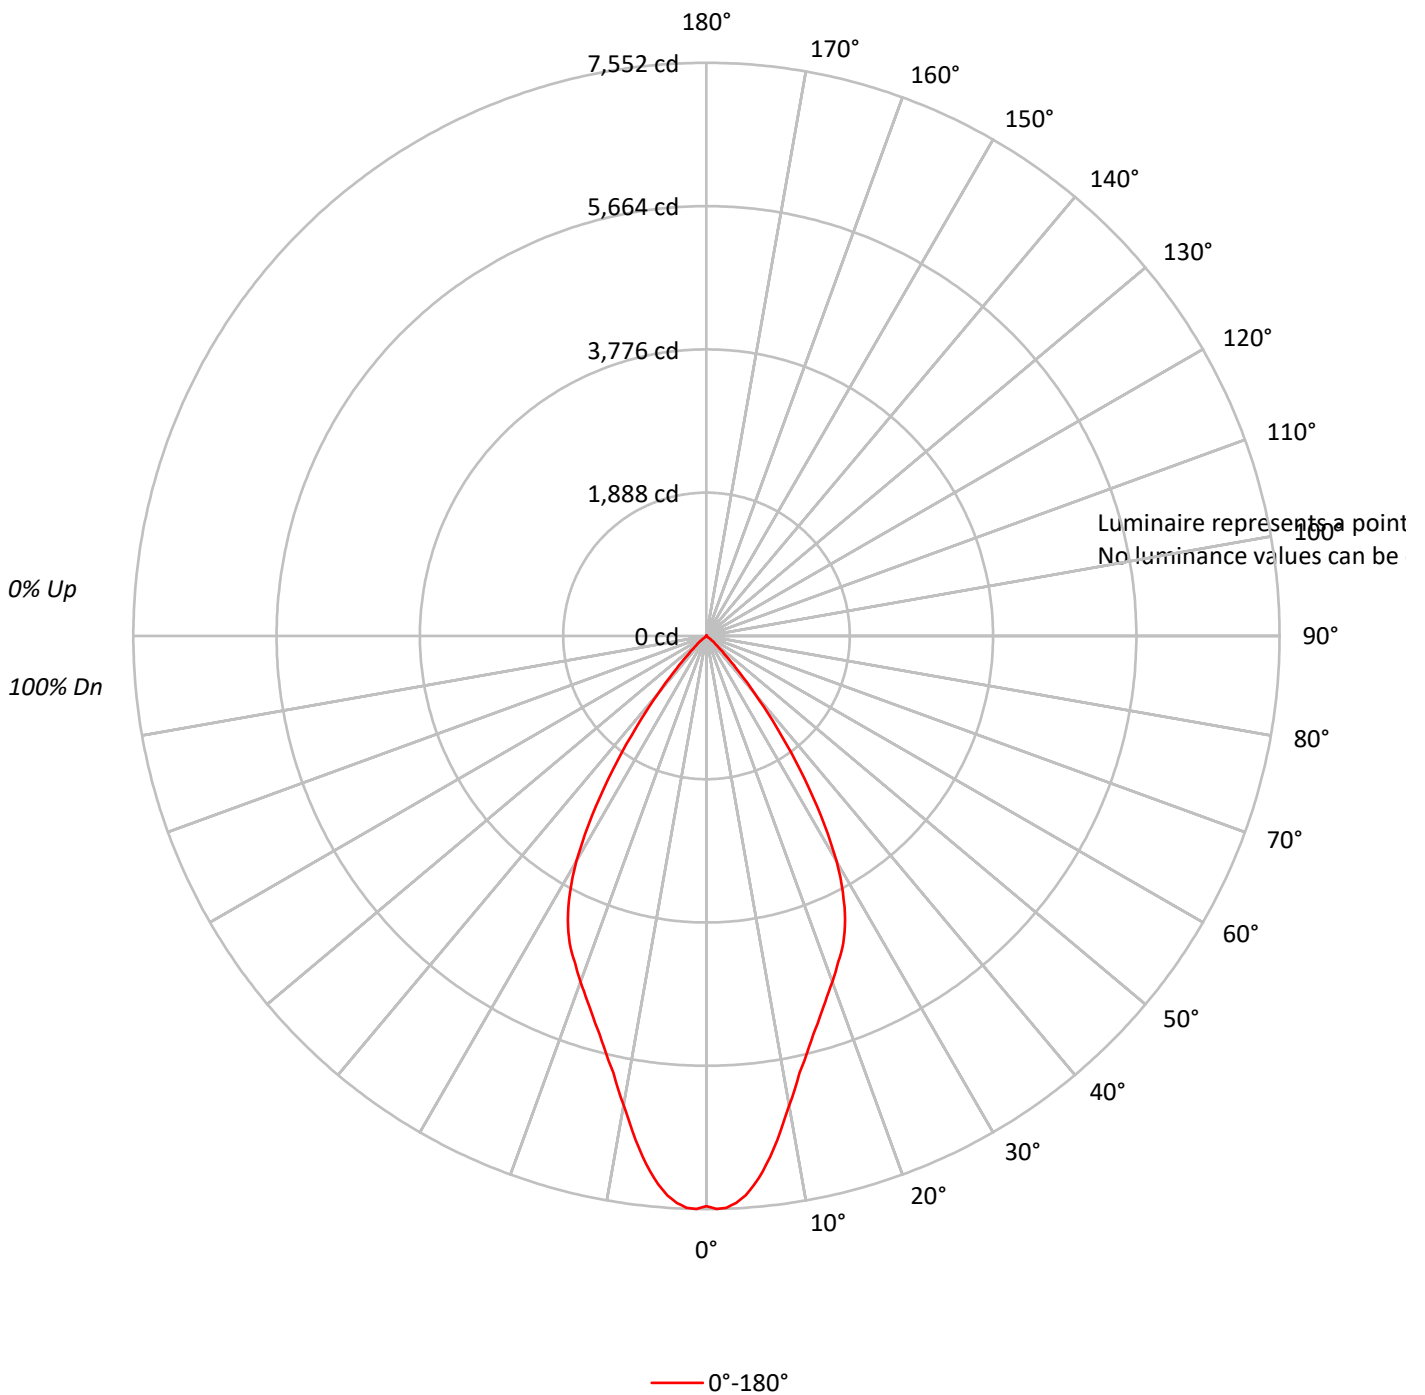



TEST NUMBER: P250620

CATALOG NUMBER: LSR8B120D010 EC8B1209730 8LBM0B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	108	106	111	109	107	105	105	103	101	101	100	98	98	97	96	94
2	108	103	99	96	106	102	98	95	98	95	93	95	93	91	93	91	89	87
3	103	96	92	88	101	95	91	87	92	89	86	90	87	84	88	85	83	81
4	98	90	85	81	96	89	84	80	87	83	79	85	81	78	83	80	77	76
5	93	85	79	75	91	84	78	74	82	77	74	80	76	73	79	75	72	71
6	88	79	74	69	87	79	73	69	77	72	69	76	71	68	74	71	68	66
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	70	66	63	62
8	80	70	64	60	79	70	64	60	69	64	60	68	63	60	67	63	60	58
9	76	66	61	57	75	66	60	57	65	60	56	64	60	56	63	59	56	55
10	72	63	57	53	71	62	57	53	62	57	53	61	56	53	60	56	53	51

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P250620

CATALOG NUMBER: LSR8B120D010 EC8B1209730 8LBM0B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	659.9	11.4
10°-20°	1532.5	26.5
20°-30°	1944.2	33.6
30°-40°	1331.9	23.0
40°-50°	303.5	5.2
50°-60°	15.1	0.3
60°-70°	0.7	0.0
70°-80°	1.1	0.0
80°-90°	1.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4136.5	71.4
0°-40°	5468.4	94.4
0°-60°	5787.0	99.9
0°-90°	5790.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5790.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	7513	
5°	7255	660
15°	5439	1532
25°	4306	1944
35°	2152	1332
45°	327	304
55°	6	15
65°	3	1
75°	0	1
85°	0	1
90°	0	



TEST NUMBER: P250620

CATALOG NUMBER: LSR8B120D010 EC8B1209730 8LBM0B

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	7512.7
1°	7551.9
2°	7537.9
3°	7481.9
4°	7386.8
5°	7255.3
6°	7095.8
7°	6911.1
8°	6706.8
9°	6488.6
10°	6281.6
11°	6091.3
12°	5887.1
13°	5738.8
14°	5582.1
15°	5439.4
16°	5310.7
17°	5184.7
18°	5067.2
19°	4952.5
20°	4849.0
21°	4742.6
22°	4633.5
23°	4538.4
24°	4432.1
25°	4306.2
26°	4166.3
27°	4004.0
28°	3830.5
29°	3637.4
30°	3424.8
31°	3184.1
32°	2935.1
33°	2674.9
34°	2409.1
35°	2151.7
37.5°	1519.3
40°	979.3
42.5°	576.4
45°	327.4
47.5°	176.3
50°	89.5
52.5°	16.8
55°	5.6
57.5°	2.8



TEST NUMBER: P250620

CATALOG NUMBER: LSR8B120D010 EC8B1209730 8LBM0B

**CANDELA DISTRIBUTION (continued):**

	0°
60°	0.0
62.5°	0.0
65°	2.8
67.5°	0.0
70°	0.0
72.5°	2.8
75°	0.0
77.5°	0.0
80°	2.8
82.5°	0.0
85°	0.0
87.5°	2.8
90°	0.0

(END OF REPORT)