

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P244879

Luminaire Tested: **LSR8B15D010 EC8B15827 8LBS0WMH**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P244879  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-14)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LSR8B15D010 EC8B15827 8LBS0WMH  
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED  
DOWNLIGHT- CYLINDEC  
80 CRI 2700 CCT WITH WARM HAZE TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1540.0 lumens  
Efficiency: N/A  
Efficacy: 106.9 lumens/watt  
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.25  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 14.4  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P244879

CATALOG NUMBER: LSR8B15D010 EC8B15827 8LBS0WMH

### Luminous Intensity Polar Plot

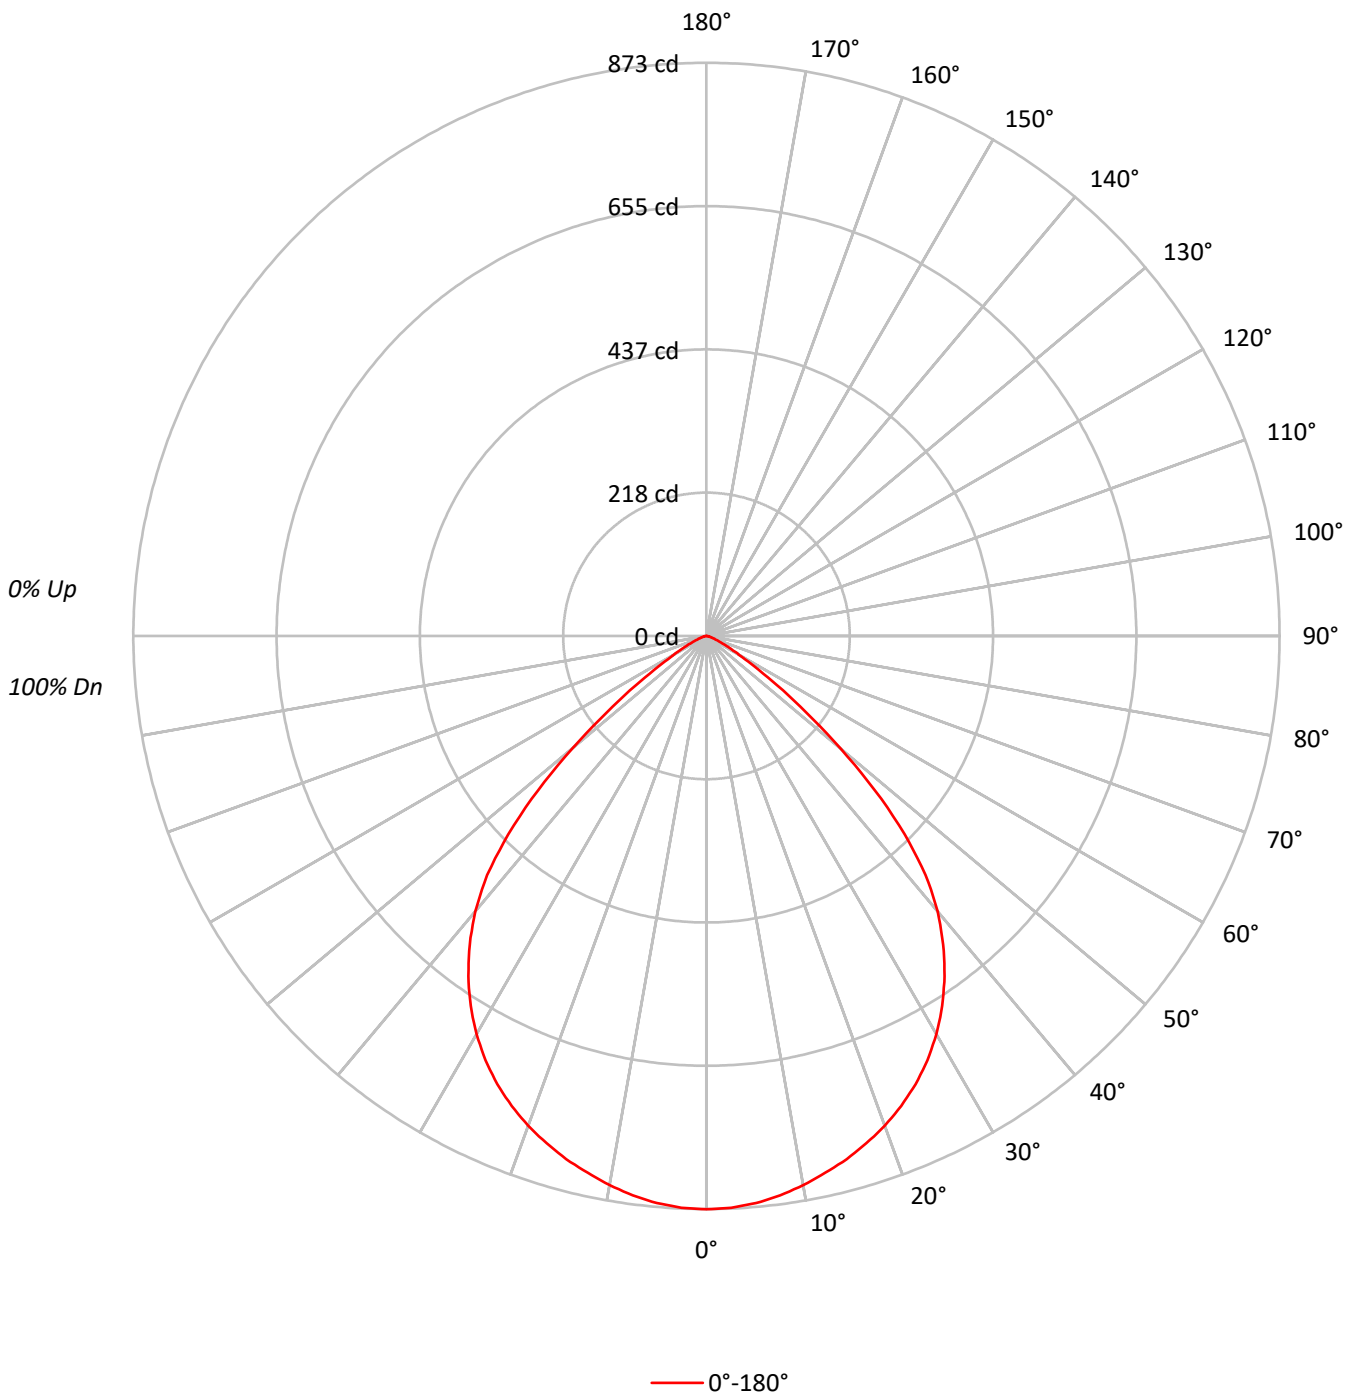



TEST NUMBER: P244879

CATALOG NUMBER: LSR8B15D010 EC8B15827 8LBS0W/MH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	107	104	101	102	100	98	99	97	95	95	94	92	91
2	105	99	94	89	102	97	92	88	94	90	86	90	87	85	88	85	83	81
3	98	90	83	78	95	88	82	78	85	80	76	83	79	75	80	77	74	72
4	91	82	75	69	89	80	74	69	78	72	68	76	71	67	74	70	66	65
5	85	74	67	62	83	73	67	61	71	65	61	70	64	60	68	63	60	58
6	79	68	61	55	77	67	60	55	66	59	55	64	58	54	63	58	54	52
7	74	63	55	50	72	62	55	50	60	54	49	59	53	49	58	53	49	47
8	69	58	50	45	68	57	50	45	56	49	45	55	49	45	54	48	45	43
9	65	53	46	41	64	53	46	41	52	45	41	51	45	41	50	45	41	39
10	61	50	43	38	60	49	42	38	48	42	38	47	42	38	46	41	37	36

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	26926
5°	26840
10°	26600
15°	26337
20°	26052
25°	25641
30°	24939
35°	23802
40°	22059
45°	18625
50°	12775
55°	7048
60°	3540
65°	1992
70°	1082
75°	774
80°	497
85°	318



TEST NUMBER: P244879

CATALOG NUMBER: LSR8B15D010 EC8B15827 8LBS0WMH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	82.2	5.3
10°-20°	232.7	15.1
20°-30°	346.4	22.5
30°-40°	393.5	25.6
40°-50°	321.6	20.9
50°-60°	126.0	8.2
60°-70°	29.4	1.9
70°-80°	7.1	0.5
80°-90°	1.1	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	661.3	42.9
0°-40°	1054.7	68.5
0°-60°	1502.4	97.6
0°-90°	1540.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1540.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	873	
5°	867	82
15°	825	233
25°	754	346
35°	632	393
45°	427	322
55°	131	126
65°	27	29
75°	6	7
85°	1	1
90°	0	



TEST NUMBER: P244879

CATALOG NUMBER: LSR8B15D010 EC8B15827 8LBS0WMH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	873.2
2.5°	871.8
5°	867.1
7.5°	859.3
10°	849.5
12.5°	837.5
15°	825.0
17.5°	810.2
20°	793.9
22.5°	775.0
25°	753.6
27.5°	728.6
30°	700.4
32.5°	668.4
35°	632.3
37.5°	592.4
40°	548.0
42.5°	494.2
45°	427.1
47.5°	348.3
50°	266.3
52.5°	191.3
55°	131.1
57.5°	85.7
60°	57.4
62.5°	39.4
65°	27.3
67.5°	18.1
70°	12.0
72.5°	8.3
75°	6.5
77.5°	4.6
80°	2.8
82.5°	1.4
85°	0.9
87.5°	0.5
90°	0.0

(END OF REPORT)