

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P244669

Luminaire Tested: **LSR8B15D010 EC8B15830 8LBW0WMH**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P244669
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-44)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B15D010 EC8B15830 8LBW0WMH
Description: PORTFOLIO 8 INCH WIDE DISTRIBUTION 60 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
80 CRI 3000 CCT WITH WARM HAZE TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1436.0 lumens
Efficiency: N/A
Efficacy: 99.7 lumens/watt
Spacing Criteria (0/90/45): 1.14 / 1.14 / 1.06
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 14.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P244669

CATALOG NUMBER: LSR8B15D010 EC8B15830 8LBW0WMH

Luminous Intensity Polar Plot

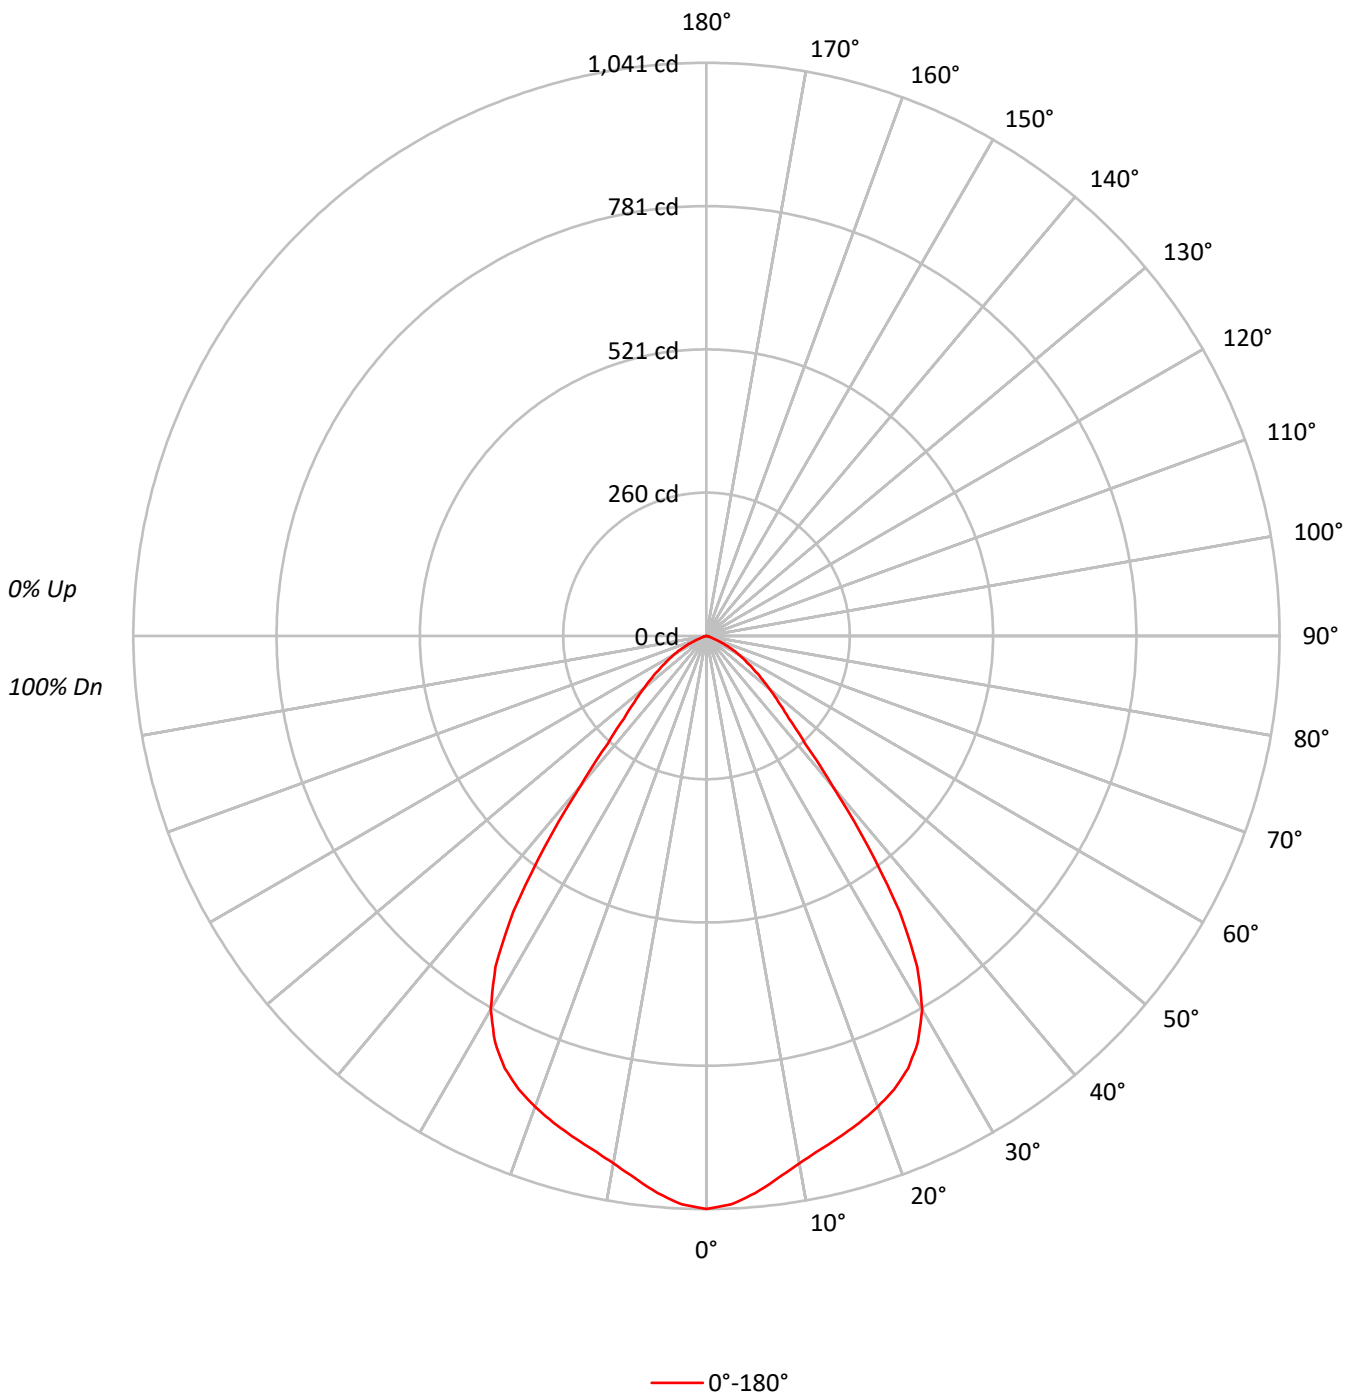



TEST NUMBER: P244669

CATALOG NUMBER: LSR8B15D010 EC8B15830 8LBW0WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | 0 |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |
| 1 | 112 | 109 | 106 | 104 | 110 | 107 | 104 | 102 | 103 | 101 | 99 | 99 | 98 | 96 | 96 | 94 | 93 | 91 |
| 2 | 106 | 100 | 95 | 91 | 103 | 98 | 94 | 90 | 95 | 91 | 88 | 92 | 89 | 86 | 89 | 86 | 84 | 83 |
| 3 | 99 | 91 | 86 | 81 | 97 | 90 | 85 | 80 | 87 | 83 | 79 | 85 | 81 | 78 | 82 | 79 | 76 | 75 |
| 4 | 93 | 84 | 77 | 72 | 91 | 83 | 77 | 72 | 80 | 75 | 71 | 78 | 74 | 70 | 76 | 73 | 69 | 68 |
| 5 | 87 | 77 | 70 | 65 | 85 | 76 | 70 | 65 | 74 | 69 | 64 | 73 | 68 | 64 | 71 | 67 | 63 | 62 |
| 6 | 82 | 71 | 64 | 59 | 80 | 70 | 64 | 59 | 69 | 63 | 59 | 67 | 62 | 58 | 66 | 61 | 58 | 56 |
| 7 | 77 | 66 | 59 | 54 | 75 | 65 | 59 | 54 | 64 | 58 | 54 | 63 | 57 | 53 | 61 | 57 | 53 | 51 |
| 8 | 72 | 61 | 54 | 50 | 71 | 61 | 54 | 50 | 60 | 54 | 49 | 58 | 53 | 49 | 57 | 53 | 49 | 47 |
| 9 | 68 | 57 | 50 | 46 | 67 | 57 | 50 | 46 | 56 | 50 | 46 | 55 | 49 | 45 | 54 | 49 | 45 | 44 |
| 10 | 65 | 54 | 47 | 42 | 63 | 53 | 47 | 42 | 52 | 46 | 42 | 51 | 46 | 42 | 51 | 46 | 42 | 41 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|-------|
| | 0° |
| 0° | 32091 |
| 5° | 31446 |
| 10° | 30448 |
| 15° | 30041 |
| 20° | 29859 |
| 25° | 29482 |
| 30° | 27898 |
| 35° | 23008 |
| 40° | 14367 |
| 45° | 9241 |
| 50° | 7162 |
| 55° | 5516 |
| 60° | 4181 |
| 65° | 2714 |
| 70° | 1163 |
| 75° | 572 |
| 80° | 249 |
| 85° | 177 |



TEST NUMBER: P244669

CATALOG NUMBER: LSR8B15D010 EC8B15830 8LBW0WMH

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 95.5 | 6.7 |
| 10°-20° | 265.8 | 18.5 |
| 20°-30° | 396.0 | 27.6 |
| 30°-40° | 367.7 | 25.6 |
| 40°-50° | 173.7 | 12.1 |
| 50°-60° | 93.3 | 6.5 |
| 60°-70° | 37.5 | 2.6 |
| 70°-80° | 5.9 | 0.4 |
| 80°-90° | 0.6 | 0.0 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 757.3 | 52.7 |
| 0°-40° | 1125.1 | 78.3 |
| 0°-60° | 1392.1 | 96.9 |
| 0°-90° | 1436.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 1436.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 1041 | |
| 5° | 1016 | 96 |
| 15° | 941 | 266 |
| 25° | 866 | 396 |
| 35° | 611 | 368 |
| 45° | 212 | 174 |
| 55° | 103 | 93 |
| 65° | 37 | 37 |
| 75° | 5 | 6 |
| 85° | 0 | 1 |
| 90° | 0 | |



TEST NUMBER: P244669

CATALOG NUMBER: LSR8B15D010 EC8B15830 8LBW0WMH

CANDELA DISTRIBUTION (FULL):

| 0° | |
|-------|--------|
| 0° | 1040.7 |
| 2.5° | 1033.5 |
| 5° | 1015.9 |
| 7.5° | 993.4 |
| 10° | 972.4 |
| 12.5° | 955.3 |
| 15° | 941.0 |
| 17.5° | 926.2 |
| 20° | 909.9 |
| 22.5° | 891.3 |
| 25° | 866.5 |
| 27.5° | 831.7 |
| 30° | 783.5 |
| 32.5° | 712.9 |
| 35° | 611.2 |
| 37.5° | 481.5 |
| 40° | 356.9 |
| 42.5° | 265.8 |
| 45° | 211.9 |
| 47.5° | 177.0 |
| 50° | 149.3 |
| 52.5° | 124.5 |
| 55° | 102.6 |
| 57.5° | 83.5 |
| 60° | 67.8 |
| 62.5° | 53.0 |
| 65° | 37.2 |
| 67.5° | 21.9 |
| 70° | 12.9 |
| 72.5° | 7.6 |
| 75° | 4.8 |
| 77.5° | 2.9 |
| 80° | 1.4 |
| 82.5° | 1.0 |
| 85° | 0.5 |
| 87.5° | 0.0 |
| 90° | 0.0 |

(END OF REPORT)