

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P244675

Luminaire Tested: **LSR8B15D010 EC8B15835 8LBW0WMH**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P244675
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-44)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B15D010 EC8B15835 8LBW0WMH
Description: PORTFOLIO 8 INCH WIDE DISTRIBUTION 60 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
80 CRI 3500 CCT WITH WARM HAZE TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1493.0 lumens
Efficiency: N/A
Efficacy: 103.7 lumens/watt
Spacing Criteria (0/90/45): 1.14 / 1.14 / 1.06
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 14.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P244675

CATALOG NUMBER: LSR8B15D010 EC8B15835 8LBW0WMH

Luminous Intensity Polar Plot

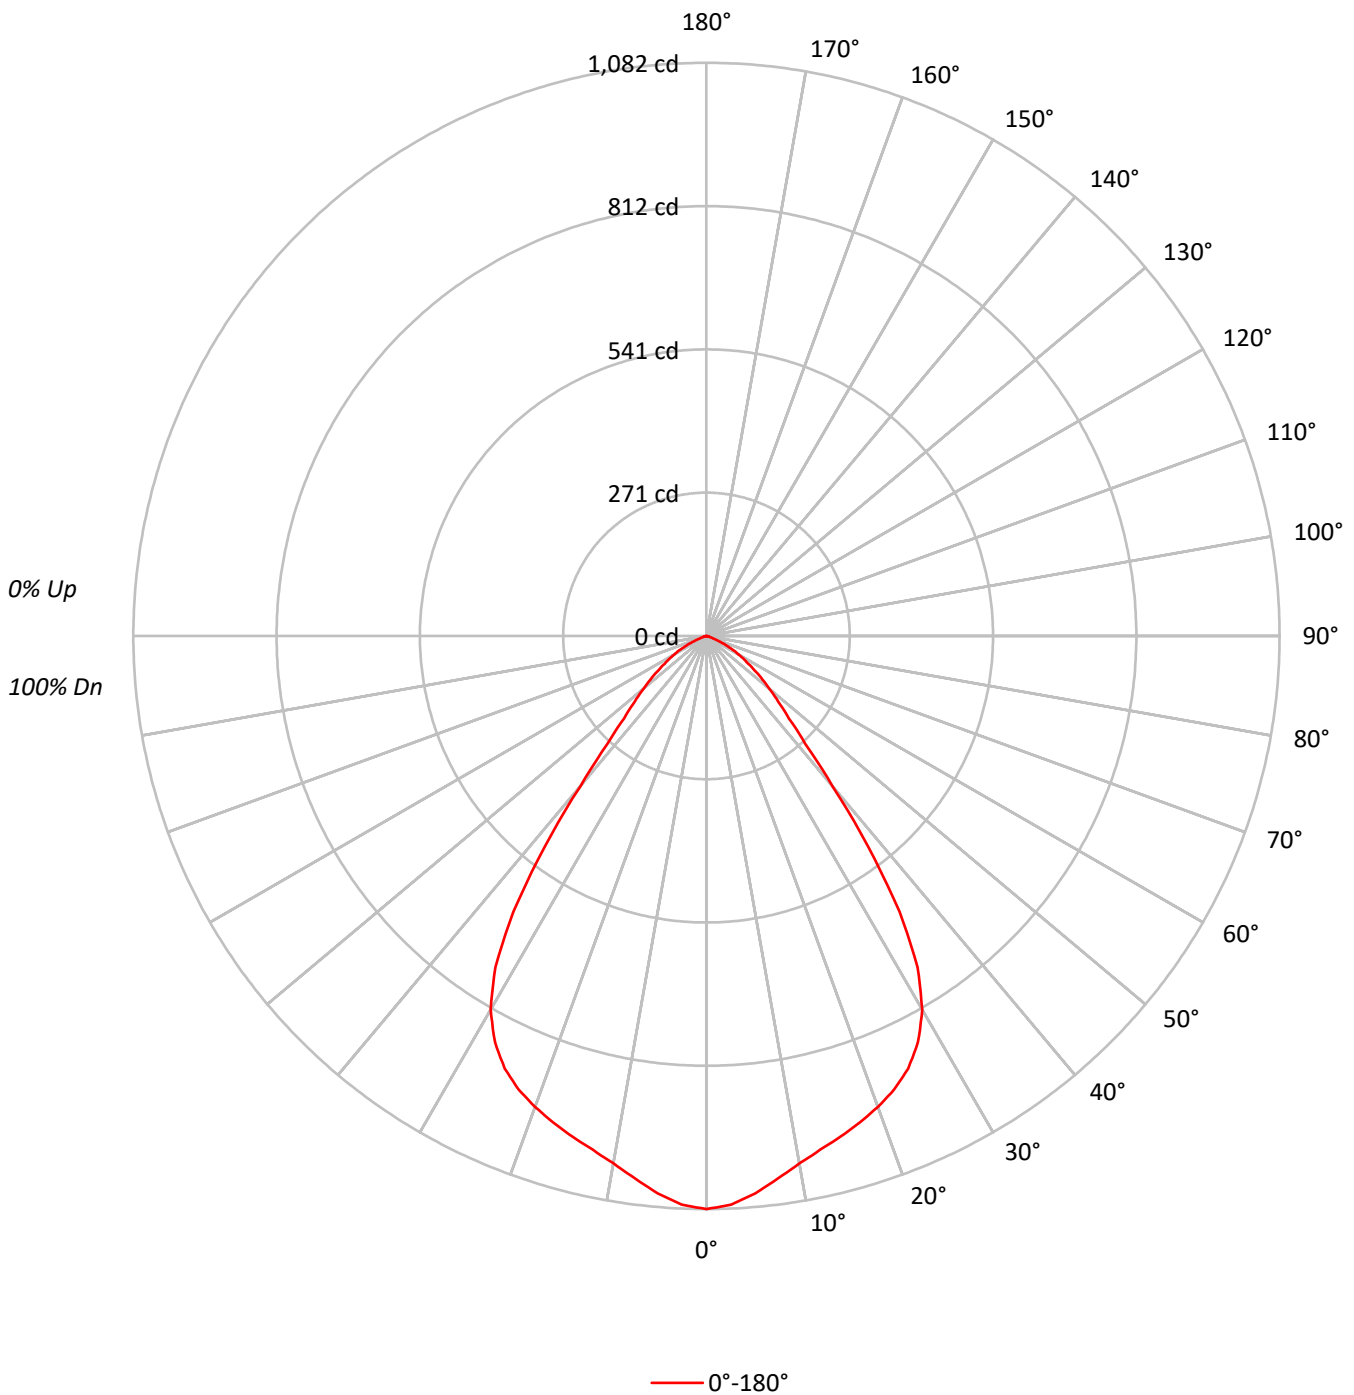



TEST NUMBER: P244675

CATALOG NUMBER: LSR8B15D010 EC8B15835 8LBW0WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	86	84	83
3	99	91	86	81	97	90	85	80	87	83	79	85	81	78	82	79	76	75
4	93	84	77	72	91	83	77	72	80	75	71	78	74	70	76	73	69	68
5	87	77	70	65	85	76	70	65	74	69	64	73	68	64	71	67	63	62
6	82	71	64	59	80	70	64	59	69	63	59	67	62	58	66	61	58	56
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	61	57	53	51
8	72	61	54	50	71	61	54	50	60	54	49	58	53	49	57	53	49	47
9	68	57	50	46	67	57	50	46	56	50	46	55	49	45	54	49	45	44
10	65	54	47	42	63	53	47	42	52	46	42	51	46	42	51	46	42	41

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	33365
5°	32694
10°	31656
15°	31231
20°	31047
25°	30652
30°	29005
35°	23923
40°	14938
45°	9607
50°	7450
55°	5736
60°	4342
65°	2824
70°	1208
75°	596
80°	266
85°	177



TEST NUMBER: P244675

CATALOG NUMBER: LSR8B15D010 EC8B15835 8LBW0WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	99.3	6.7
10°-20°	276.4	18.5
20°-30°	411.7	27.6
30°-40°	382.3	25.6
40°-50°	180.6	12.1
50°-60°	97.0	6.5
60°-70°	39.0	2.6
70°-80°	6.1	0.4
80°-90°	0.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	787.4	52.7
0°-40°	1169.7	78.3
0°-60°	1447.4	96.9
0°-90°	1493.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1493.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1082	
5°	1056	99
15°	978	276
25°	901	412
35°	636	382
45°	220	181
55°	107	97
65°	39	39
75°	5	6
85°	0	1
90°	0	



TEST NUMBER: P244675

CATALOG NUMBER: LSR8B15D010 EC8B15835 8LBW0WMH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1082.0
2.5°	1074.5
5°	1056.2
7.5°	1032.9
10°	1011.0
12.5°	993.2
15°	978.3
17.5°	962.9
20°	946.1
22.5°	926.7
25°	900.9
27.5°	864.7
30°	814.6
32.5°	741.2
35°	635.5
37.5°	500.6
40°	371.1
42.5°	276.3
45°	220.3
47.5°	184.1
50°	155.3
52.5°	129.5
55°	106.7
57.5°	86.8
60°	70.4
62.5°	55.1
65°	38.7
67.5°	22.8
70°	13.4
72.5°	7.9
75°	5.0
77.5°	3.0
80°	1.5
82.5°	1.0
85°	0.5
87.5°	0.0
90°	0.0

(END OF REPORT)