

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P245371

Luminaire Tested: **LSR8B15D010 EC8B159727 8LBS0WH**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P245371  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-15)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LSR8B15D010 EC8B159727 8LBS0WH  
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED  
DOWNLIGHT- CYLINDEC  
97 CRI 2700 CCT WITH WHEAT TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1143.0 lumens  
Efficiency: N/A  
Efficacy: 79.4 lumens/watt  
Spacing Criteria (0/90/45): 1.27 / 1.27 / 1.23  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 14.4  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P245371

CATALOG NUMBER: LSR8B15D010 EC8B159727 8LBS0WH

### Luminous Intensity Polar Plot

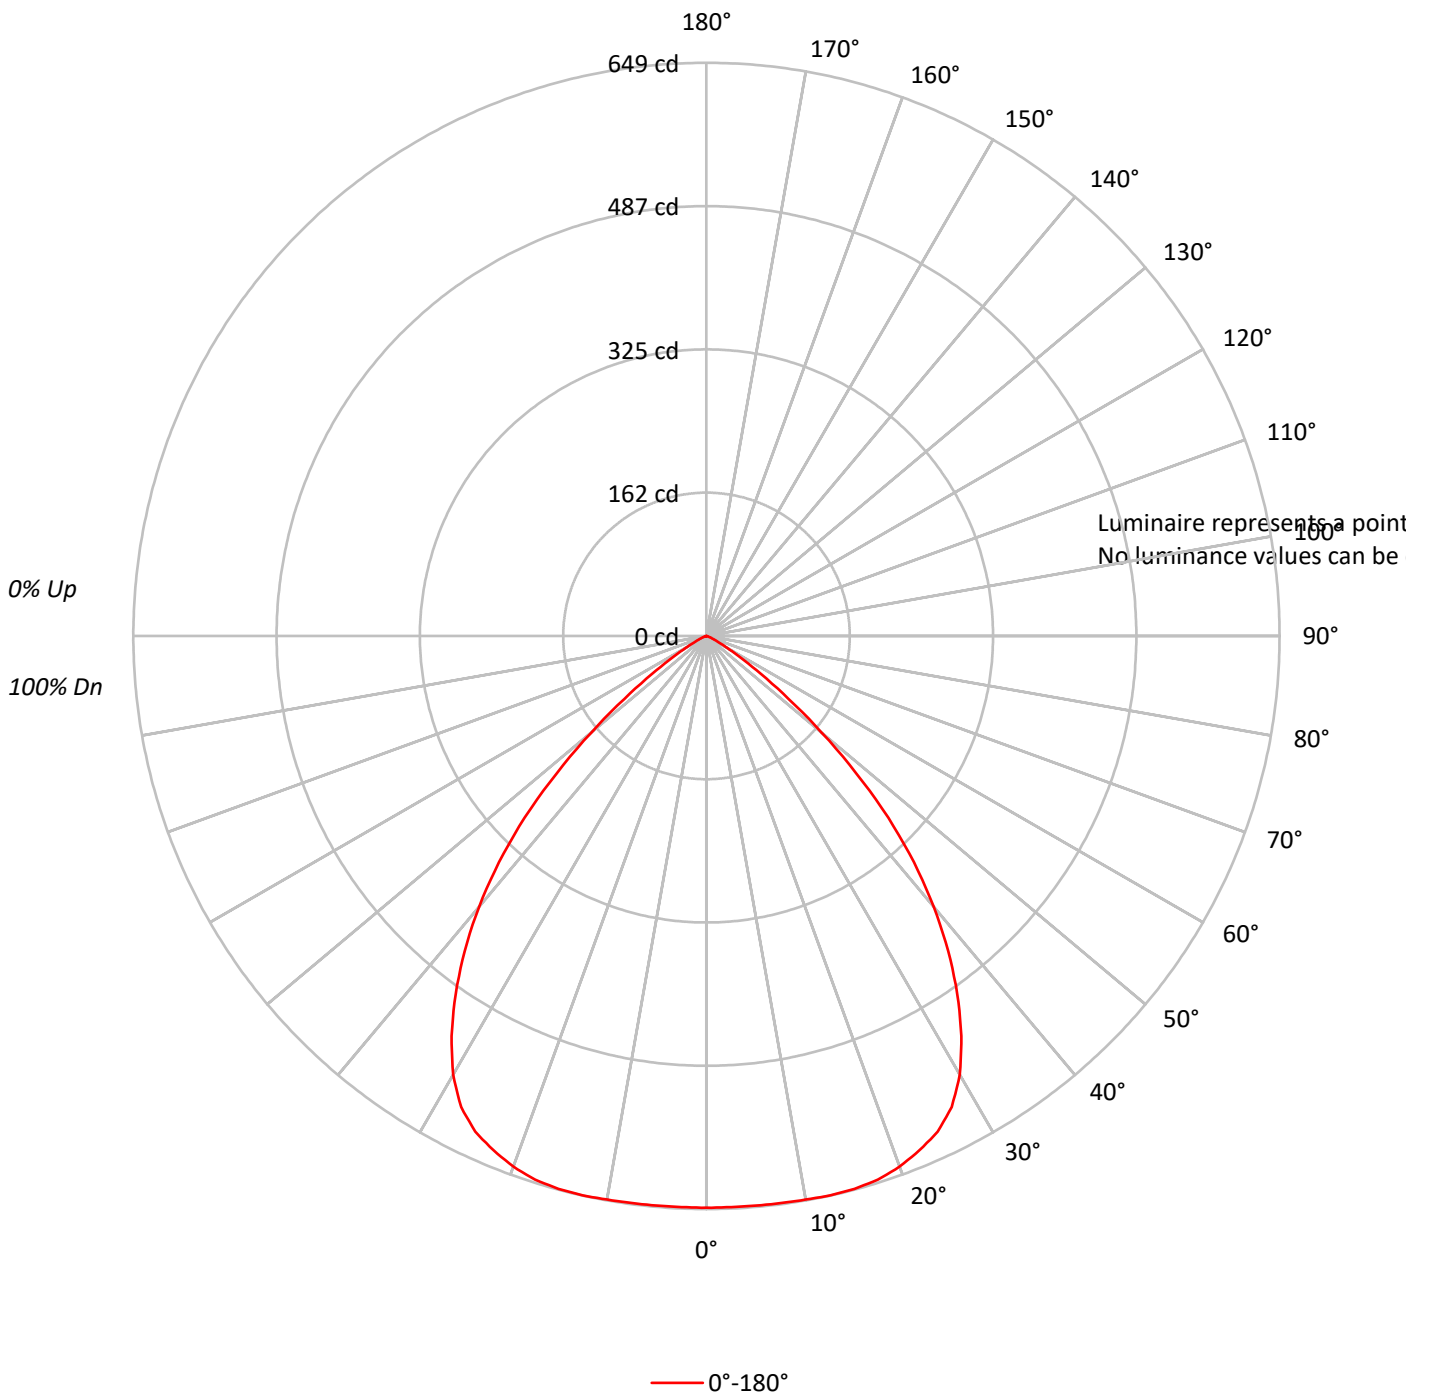



TEST NUMBER: P245371

CATALOG NUMBER: LSR8B15D010 EC8B159727 8LBS0WH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	104	110	107	104	102	103	101	99		99	97	96		96	94	93	91
2	105	100	95	91	103	98	93	90	94	91	88		91	88	86		89	86	84	82
3	99	91	85	80	96	89	84	79	87	82	78		84	80	77		82	78	76	74
4	92	83	76	71	90	82	76	71	79	74	70		77	73	69		75	71	68	66
5	86	76	69	64	84	75	68	63	73	67	63		71	66	62		70	65	62	60
6	80	70	63	57	79	69	62	57	67	61	57		66	60	56		64	60	56	54
7	75	64	57	52	74	63	57	52	62	56	51		61	55	51		60	55	51	49
8	71	59	52	47	69	59	52	47	57	51	47		56	51	47		55	50	46	45
9	66	55	48	43	65	54	48	43	53	47	43		52	47	43		51	46	43	41
10	63	51	44	40	61	51	44	40	50	44	39		49	43	39		48	43	39	38

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P245371

CATALOG NUMBER: LSR8B15D010 EC8B159727 8LBS0WH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	61.8	5.4
10°-20°	183.1	16.0
20°-30°	283.6	24.8
30°-40°	307.2	26.9
40°-50°	221.0	19.3
50°-60°	74.0	6.5
60°-70°	11.2	1.0
70°-80°	1.0	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	528.5	46.2
0°-40°	835.7	73.1
0°-60°	1130.7	98.9
0°-90°	1143.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1143.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	647	
5°	647	62
15°	648	183
25°	619	284
35°	495	307
45°	291	221
55°	75	74
65°	10	11
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P245371

CATALOG NUMBER: LSR8B15D010 EC8B159727 8LBS0WH

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	647.4
2.5°	647.4
5°	647.4
7.5°	647.7
10°	648.1
12.5°	648.7
15°	648.1
17.5°	645.4
20°	639.5
22.5°	630.5
25°	619.3
27.5°	601.4
30°	573.6
32.5°	537.2
35°	495.2
37.5°	449.9
40°	400.6
42.5°	347.7
45°	291.1
47.5°	229.9
50°	170.7
52.5°	117.1
55°	74.8
57.5°	44.7
60°	26.8
62.5°	16.2
65°	9.9
67.5°	5.0
70°	2.3
72.5°	1.0
75°	0.7
77.5°	0.7
80°	0.3
82.5°	0.3
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)