

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P250558

Luminaire Tested: **LSR8B150D010 EC8B150835 8LBM0B**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P250558
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P13928)
Test Lab: INNOVATION CENTER-P1
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B150D010 EC8B150835 8LBM0B
Description: PORTFOLIO 8 INCH MEDIUM DISTRIBUTION 55 DEG CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
80 CRI 3500 CCT WITH SPECULAR BLACK TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 10225.0 lumens
Efficiency: N/A
Efficacy: 64.5 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.87
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 158.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P250558

CATALOG NUMBER: LSR8B150D010 EC8B150835 8LBM0B

Luminous Intensity Polar Plot

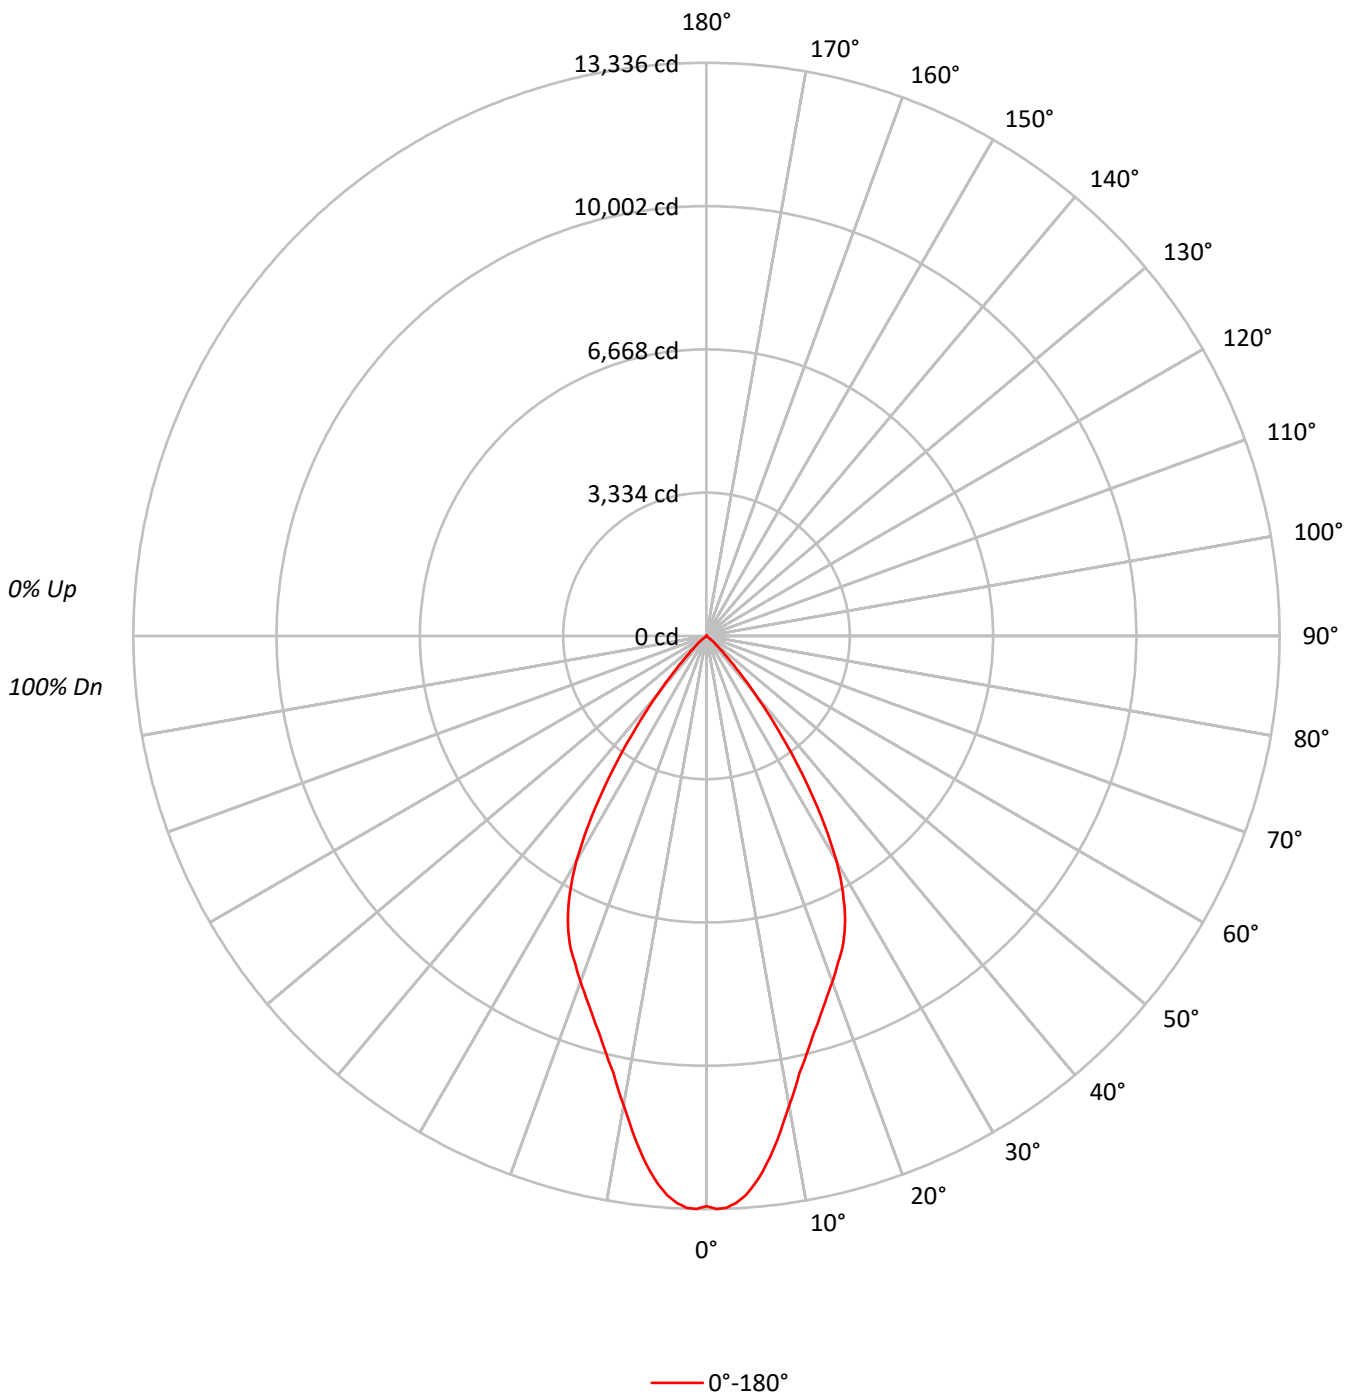



TEST NUMBER: P250558

CATALOG NUMBER: LSR8B150D010 EC8B150835 8LBM0B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	108	106	111	109	107	105	105	103	101		101	100	98		98	97	96	94
2	108	103	99	96	106	102	98	95	98	95	93		95	93	91		93	91	89	87
3	103	96	92	88	101	95	91	87	92	89	86		90	87	84		88	85	83	81
4	98	90	85	81	96	89	84	80	87	83	79		85	81	78		83	80	77	76
5	93	85	79	75	91	84	78	74	82	77	74		80	76	73		79	75	72	71
6	88	79	74	69	87	79	73	69	77	72	69		76	71	68		74	71	68	66
7	84	75	69	65	83	74	68	64	73	68	64		72	67	64		70	66	63	62
8	80	70	64	60	79	70	64	60	69	64	60		68	63	60		67	63	60	58
9	76	66	61	57	75	66	60	57	65	60	56		64	60	56		63	59	56	55
10	72	63	57	53	71	62	57	53	62	57	53		61	56	53		60	56	53	51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	409115
5°	396606
10°	347347
15°	306657
20°	281004
25°	258740
30°	215353
35°	143040
40°	69615
45°	25215
50°	7584
55°	532
60°	0
65°	365
70°	0
75°	0
80°	888
85°	0



TEST NUMBER: P250558

CATALOG NUMBER: LSR8B150D010 EC8B150835 8LBM0B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1165.3	11.4
10°-20°	2706.3	26.5
20°-30°	3433.3	33.6
30°-40°	2352.1	23.0
40°-50°	536.0	5.2
50°-60°	26.7	0.3
60°-70°	1.2	0.0
70°-80°	2.0	0.0
80°-90°	2.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	7305.0	71.4
0°-40°	9657.0	94.4
0°-60°	10219.8	99.9
0°-90°	10225.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	10225.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	13267	
5°	12813	###
15°	9606	2706
25°	7605	3433
35°	3800	2352
45°	578	536
55°	10	27
65°	5	1
75°	0	2
85°	0	2
90°	0	



TEST NUMBER: P250558

CATALOG NUMBER: LSR8B150D010 EC8B150835 8LBM0B

CANDELA DISTRIBUTION (FULL):

0°	
0°	13267.3
1°	13336.4
2°	13311.7
3°	13212.9
4°	13044.8
5°	12812.7
6°	12531.0
7°	12204.9
8°	11844.1
9°	11458.7
10°	11093.1
11°	10757.1
12°	10396.4
13°	10134.5
14°	9857.8
15°	9605.8
16°	9378.5
17°	9156.1
18°	8948.6
19°	8746.0
20°	8563.2
21°	8375.4
22°	8182.7
23°	8014.7
24°	7827.0
25°	7604.6
26°	7357.5
27°	7071.0
28°	6764.6
29°	6423.6
30°	6048.1
31°	5623.1
32°	5183.4
33°	4723.8
34°	4254.4
35°	3799.8
37.5°	2683.1
40°	1729.4
42.5°	1017.9
45°	578.2
47.5°	311.3
50°	158.1
52.5°	29.6
55°	9.9
57.5°	5.0



TEST NUMBER: P250558

CATALOG NUMBER: LSR8B150D010 EC8B150835 8LBM0B

CANDELA DISTRIBUTION (continued):

	0°
60°	0.0
62.5°	0.0
65°	5.0
67.5°	0.0
70°	0.0
72.5°	5.0
75°	0.0
77.5°	0.0
80°	5.0
82.5°	0.0
85°	0.0
87.5°	5.0
90°	0.0

(END OF REPORT)