

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P247871

Luminaire Tested: **LSR8B150D010 EC8B1509730 8LBM0LI**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P247871
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-90)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B150D010 EC8B1509730 8LBM0LI
Description: PORTFOLIO 8 INCH MEDIUM DISTRIBUTION 55 DEG CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
97 CRI 3000 CCT WITH SPECULAR CLEAR TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 12229.0 lumens
Efficiency: N/A
Efficacy: 77.2 lumens/watt
Spacing Criteria (0/90/45): 0.7 / 0.7 / 0.76
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 158.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P247871

CATALOG NUMBER: LSR8B150D010 EC8B1509730 8LBM0LI

Luminous Intensity Polar Plot

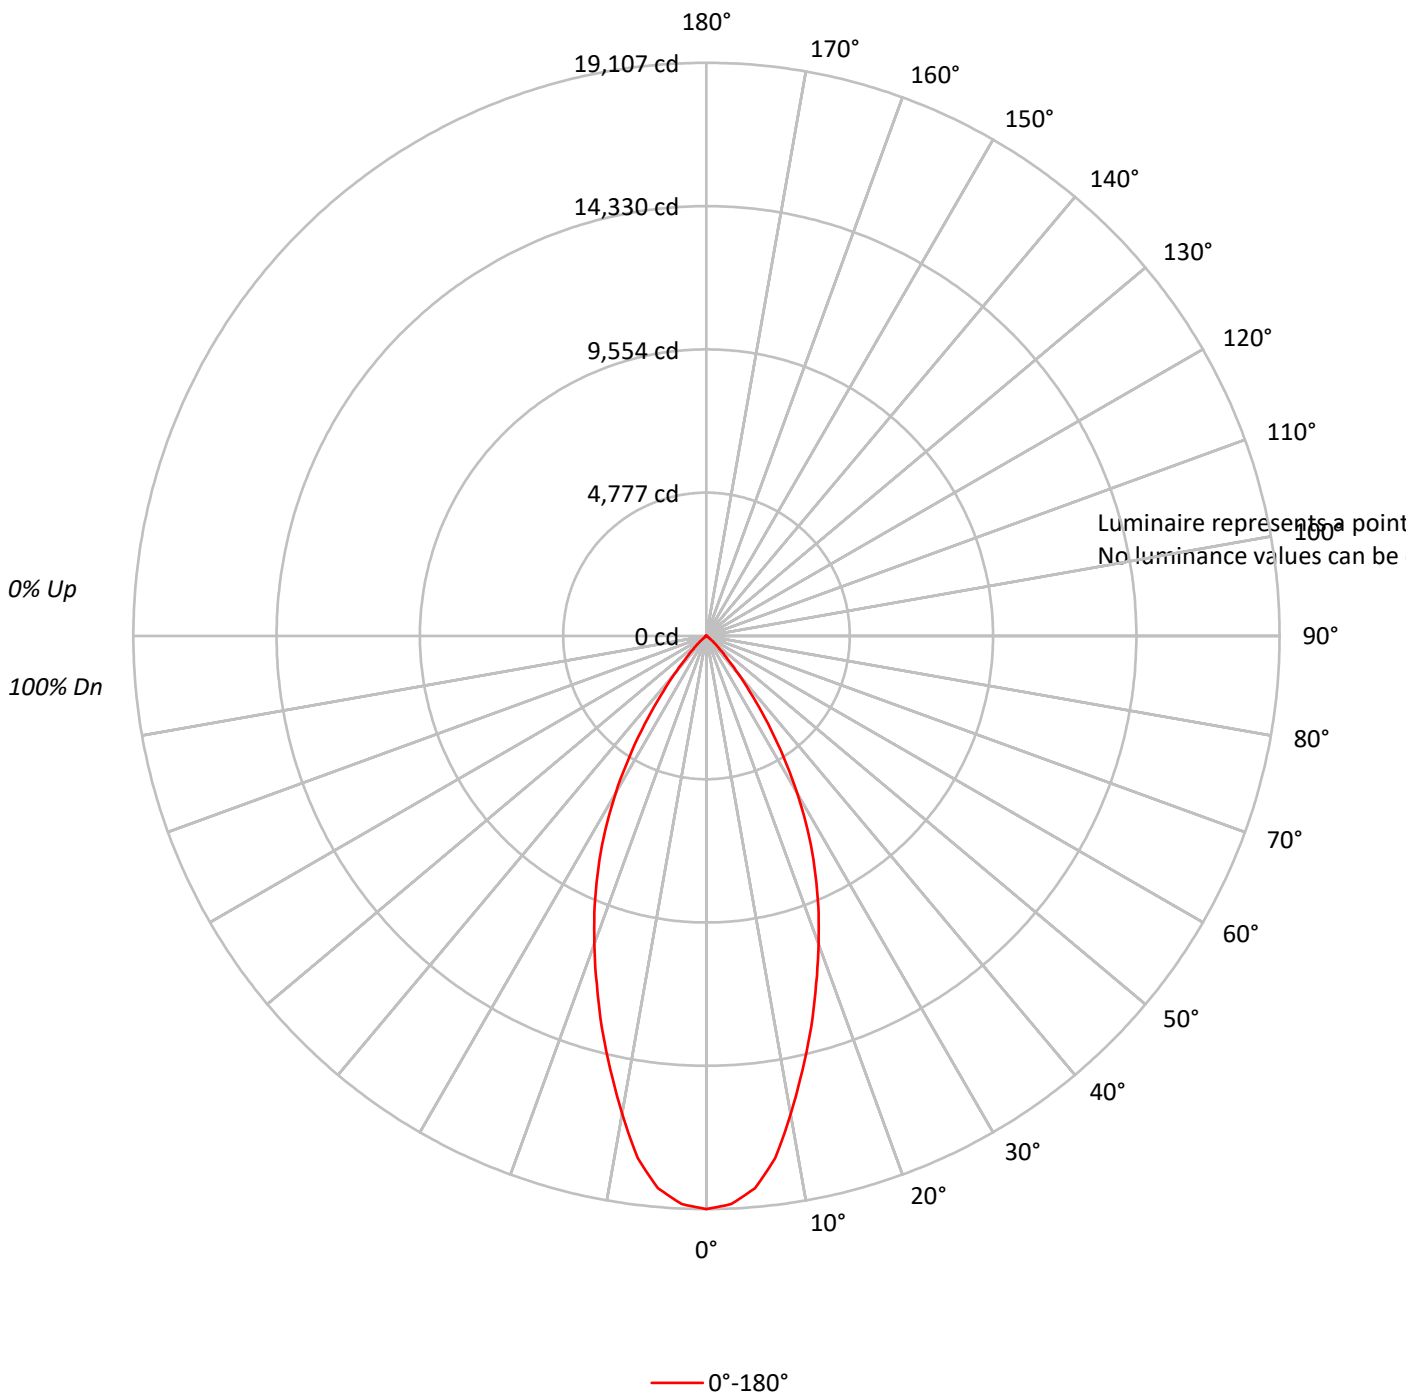



TEST NUMBER: P247871

CATALOG NUMBER: LSR8B150D010 EC8B1509730 8LBM0LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	91	90	88
3	103	97	93	89	102	96	92	88	93	90	87	91	88	85	89	86	84	83
4	99	91	86	82	97	90	86	82	88	84	81	86	83	80	84	81	79	78
5	94	86	81	77	92	85	80	76	83	79	76	82	78	75	80	77	74	73
6	90	81	76	72	88	80	75	71	79	74	71	78	73	70	76	73	70	68
7	86	77	71	67	84	76	71	67	75	70	67	74	69	66	73	69	66	65
8	82	73	67	63	80	72	67	63	71	66	63	70	66	62	69	65	62	61
9	78	69	63	60	77	68	63	59	68	63	59	67	62	59	66	62	59	58
10	75	66	60	56	74	65	60	56	64	59	56	64	59	56	63	59	56	55

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P247871

CATALOG NUMBER: LSR8B150D010 EC8B1509730 8LBM0LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1690.9	13.8
10°-20°	3750.8	30.7
20°-30°	3874.6	31.7
30°-40°	2258.8	18.5
40°-50°	566.1	4.6
50°-60°	68.6	0.6
60°-70°	14.4	0.1
70°-80°	1.8	0.0
80°-90°	3.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	9316.3	76.2
0°-40°	11575.2	94.7
0°-60°	12209.8	99.8
0°-90°	12229.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	12229.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	19107	
5°	18488	###
15°	13485	3751
25°	8520	3875
35°	3572	2259
45°	642	566
55°	58	69
65°	10	14
75°	2	2
85°	0	3
90°	0	



TEST NUMBER: P247871

CATALOG NUMBER: LSR8B150D010 EC8B1509730 8LBM0LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	19107.2
2.5°	18959.1
5°	18488.4
7.5°	17561.6
10°	16175.2
12.5°	14802.0
15°	13484.9
17.5°	12163.3
20°	10922.7
22.5°	9730.8
25°	8519.7
27.5°	7315.2
30°	6050.3
32.5°	4802.4
35°	3572.1
37.5°	2509.9
40°	1645.0
42.5°	1036.5
45°	642.4
47.5°	391.9
50°	211.4
52.5°	103.1
55°	58.2
57.5°	31.7
60°	27.3
62.5°	19.2
65°	9.6
67.5°	11.8
70°	8.1
72.5°	0.0
75°	1.5
77.5°	0.7
80°	1.5
82.5°	2.2
85°	0.0
87.5°	8.1
90°	0.0

(END OF REPORT)