

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P244514

Luminaire Tested: **LSR8B20D010 EC8B20930 8LBS0H**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P244514  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-13)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LSR8B20D010 EC8B20930 8LBS0H  
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED  
DOWNLIGHT- CYLINDEC  
97 CRI 3000 CCT WITH SEMI-SPECULAR CLEAR TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1962.8 lumens  
Efficiency: N/A  
Efficacy: 92.2 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.23  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 21.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P244514

CATALOG NUMBER: LSR8B20D010 EC8B20930 8LBS0H

### Luminous Intensity Polar Plot

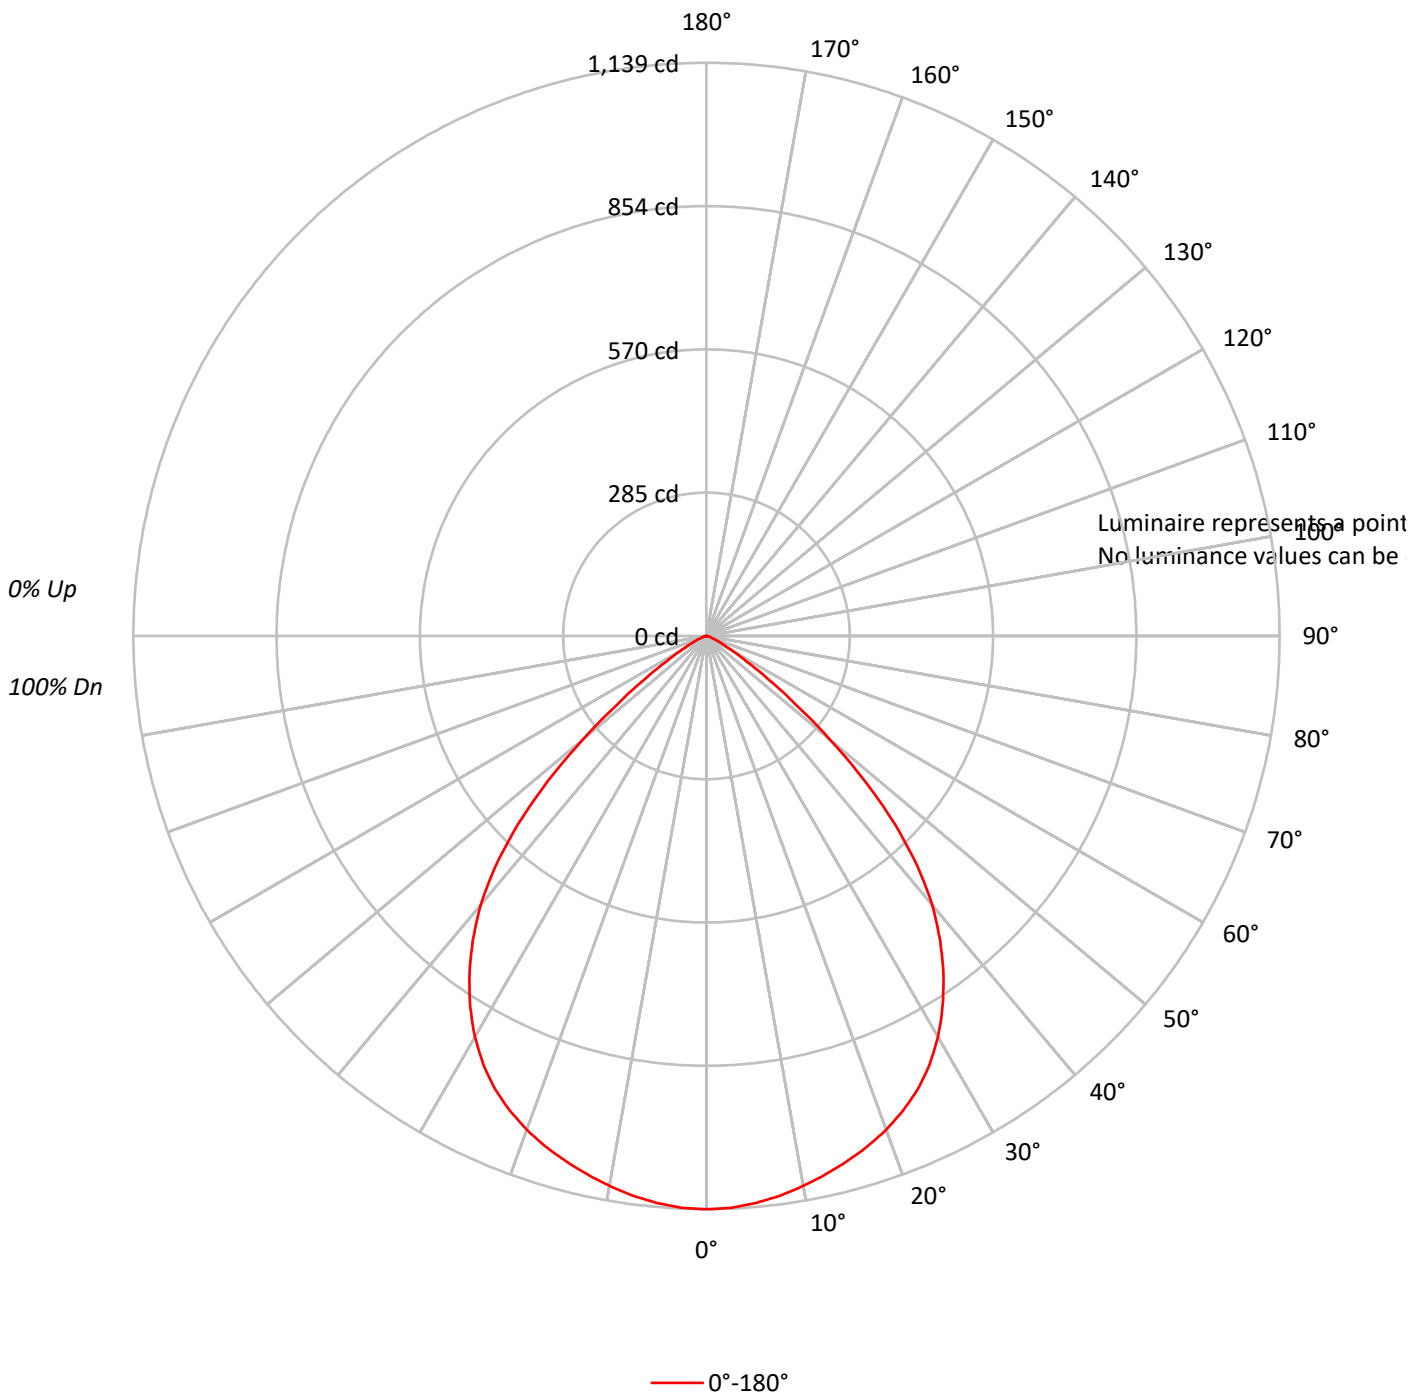



TEST NUMBER: P244514

CATALOG NUMBER: LSR8B20D010 EC8B20930 8LBS0H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	107	104	102	103	100	98	99	97	95	95	94	93	91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81
3	98	90	84	79	96	89	83	78	86	81	77	83	79	76	81	78	75	73
4	91	82	75	70	89	81	75	70	79	73	69	76	72	68	74	70	67	65
5	85	75	68	63	83	74	67	62	72	66	62	70	65	61	69	64	60	59
6	80	69	61	56	78	68	61	56	66	60	56	65	59	55	63	58	55	53
7	75	63	56	51	73	63	56	51	61	55	50	60	54	50	59	54	50	48
8	70	58	51	46	68	58	51	46	57	50	46	55	50	46	54	49	45	44
9	66	54	47	42	64	53	47	42	52	46	42	51	46	42	51	45	42	40
10	62	50	43	39	61	50	43	39	49	43	38	48	42	38	47	42	38	37

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P244514

CATALOG NUMBER: LSR8B20D010 EC8B20930 8LBS0H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	107.3	5.5
10°-20°	305.0	15.5
20°-30°	456.3	23.2
30°-40°	510.3	26.0
40°-50°	400.4	20.4
50°-60°	146.1	7.4
60°-70°	29.8	1.5
70°-80°	6.4	0.3
80°-90°	1.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	868.5	44.2
0°-40°	1378.9	70.3
0°-60°	1925.3	98.1
0°-90°	1962.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1962.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1139	
5°	1131	107
15°	1081	305
25°	994	456
35°	821	510
45°	530	400
55°	149	146
65°	27	30
75°	6	6
85°	1	1
90°	0	



TEST NUMBER: P244514

CATALOG NUMBER: LSR8B20D010 EC8B20930 8LBS0H

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1139.2
2.5°	1137.4
5°	1131.0
7.5°	1121.8
10°	1109.6
12.5°	1095.7
15°	1080.6
17.5°	1063.8
20°	1044.2
22.5°	1021.0
25°	993.9
27.5°	960.2
30°	920.3
32.5°	873.5
35°	821.4
37.5°	762.8
40°	698.0
42.5°	621.0
45°	530.2
47.5°	427.8
50°	321.3
52.5°	225.2
55°	149.3
57.5°	95.5
60°	61.3
62.5°	40.5
65°	27.2
67.5°	17.4
70°	11.0
72.5°	7.5
75°	5.8
77.5°	4.0
80°	2.9
82.5°	1.7
85°	1.1
87.5°	0.6
90°	0.0

(END OF REPORT)