

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P244737

Luminaire Tested: **LSR8B30D010 EC8B30827 8LBN0WMH**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P244737  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P201884)  
Test Lab: INNOVATION CENTER-P1  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LSR8B30D010 EC8B30827 8LBN0WMH  
Description: PORTFOLIO 8 INCH NARROW DISTRIBUTION 50 DEGREE CUTOFF RECESSED  
DOWNLIGHT- CYLINDEC  
80 CRI 2700 CCT WITH WARM HAZE TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2549.9 lumens  
Efficiency: N/A  
Efficacy: 94.1 lumens/watt  
Spacing Criteria (0/90/45): 0.74 / 0.74 / 0.79  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 27.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P244737

CATALOG NUMBER: LSR8B30D010 EC8B30827 8LBN0WMH

### Luminous Intensity Polar Plot

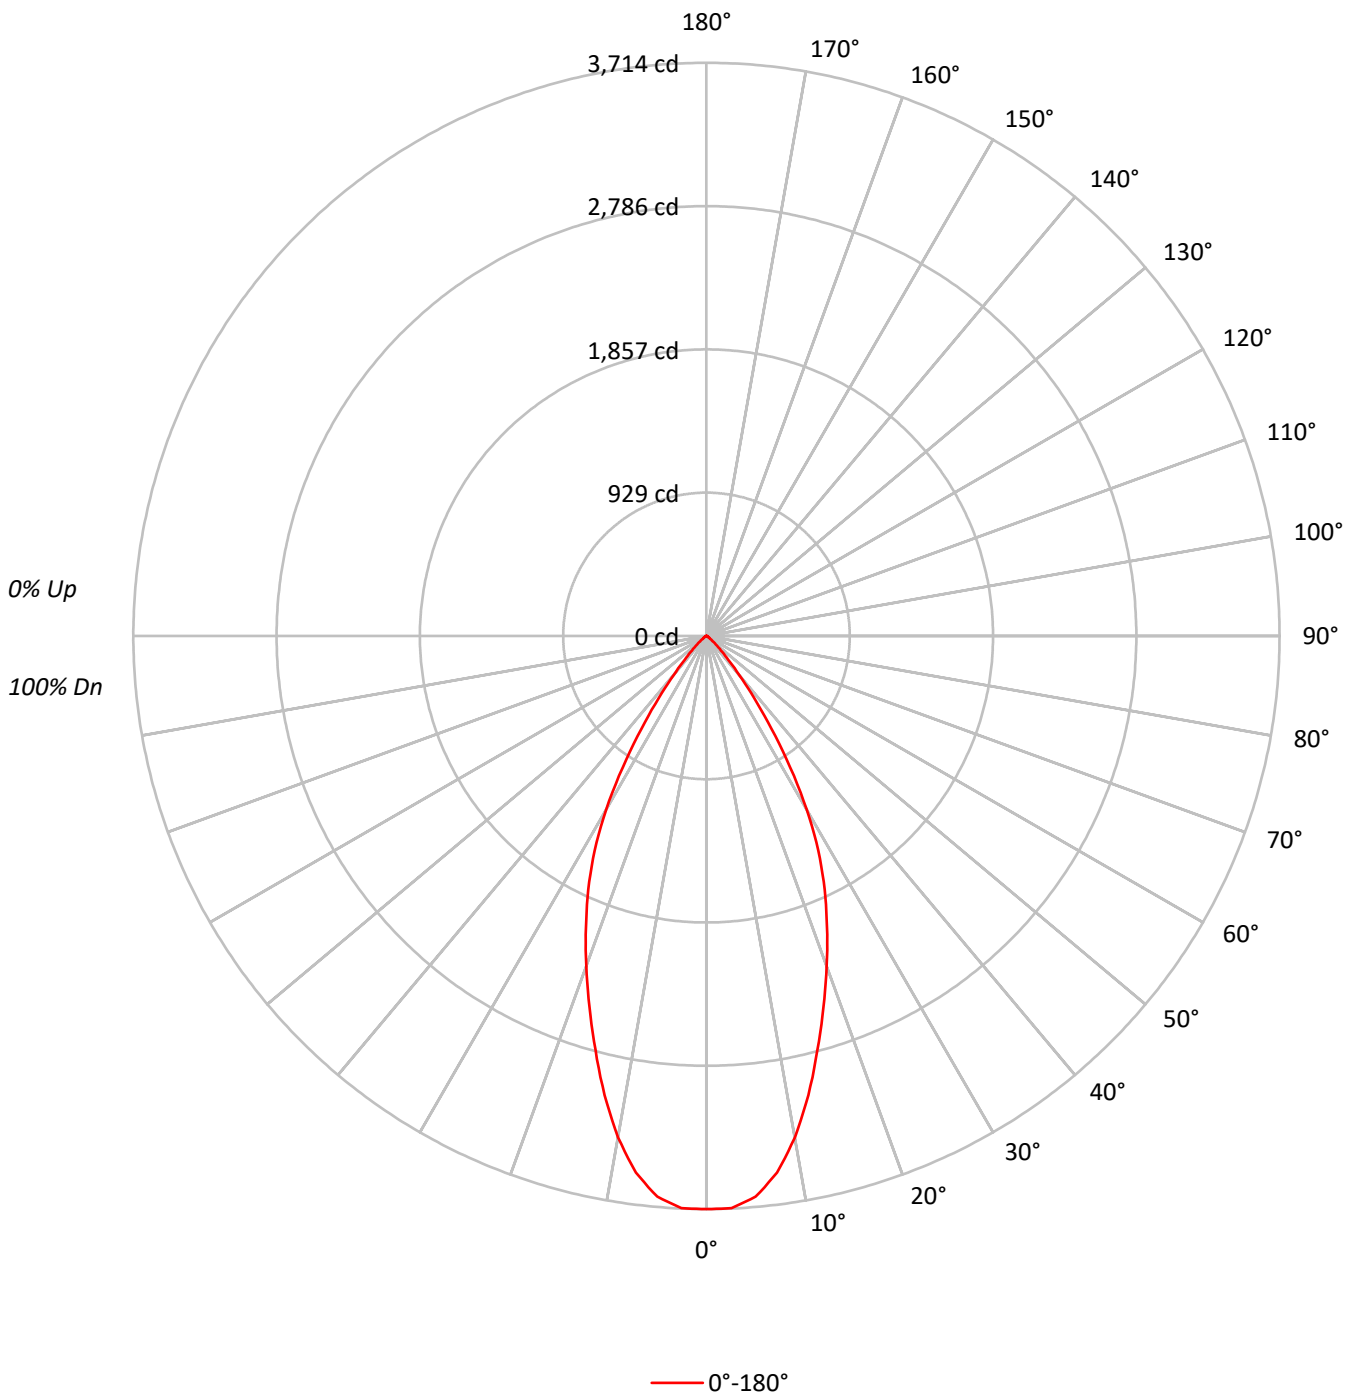



TEST NUMBER: P244737

CATALOG NUMBER: LSR8B30D010 EC8B30827 8LBN0WMH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	108	104	100	97	106	102	99	96	99	96	93	96	94	91	93	91	90	88
3	103	97	92	89	101	96	91	88	93	89	86	91	88	85	89	86	84	82
4	98	91	86	82	97	90	85	81	88	84	80	86	82	79	84	81	79	77
5	94	86	80	76	92	85	80	76	83	78	75	81	77	74	80	76	74	72
6	89	81	75	71	88	80	75	71	79	74	70	77	73	70	76	72	69	68
7	85	76	71	67	84	76	70	66	74	70	66	73	69	66	72	68	65	64
8	81	72	66	63	80	72	66	62	71	66	62	70	65	62	69	65	62	60
9	78	68	63	59	77	68	63	59	67	62	59	66	62	59	65	61	58	57
10	74	65	59	56	73	65	59	56	64	59	56	63	59	55	62	58	55	54

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	114514
5°	112917
10°	103317
15°	88704
20°	74698
25°	61703
30°	46292
35°	27589
40°	13143
45°	5726
50°	2586
55°	1134
60°	672
65°	365
70°	379
75°	0
80°	142
85°	601



TEST NUMBER: P244737

CATALOG NUMBER: LSR8B30D010 EC8B30827 8LBN0WMH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	336.9	13.2
10°-20°	774.3	30.4
20°-30°	821.5	32.2
30°-40°	468.7	18.4
40°-50°	116.2	4.6
50°-60°	22.8	0.9
60°-70°	6.8	0.3
70°-80°	1.5	0.1
80°-90°	1.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1932.6	75.8
0°-40°	2401.4	94.2
0°-60°	2540.4	99.6
0°-90°	2549.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2549.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3714	
5°	3648	337
15°	2779	774
25°	1814	821
35°	733	469
45°	131	116
55°	21	23
65°	5	7
75°	0	2
85°	2	1
90°	0	0
95°	0	0
105°	0	0
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0



TEST NUMBER: P244737

CATALOG NUMBER: LSR8B30D010 EC8B30827 8LBN0WMH

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	3713.6
2.5°	3711.9
5°	3647.9
7.5°	3507.4
10°	3299.6
12.5°	3048.8
15°	2778.6
17.5°	2521.2
20°	2276.3
22.5°	2040.7
25°	1813.5
27.5°	1569.4
30°	1300.1
32.5°	1010.6
35°	732.9
37.5°	504.9
40°	326.5
42.5°	207.0
45°	131.3
47.5°	85.9
50°	53.9
52.5°	32.8
55°	21.1
57.5°	16.9
60°	10.9
62.5°	10.1
65°	5.0
67.5°	5.0
70°	4.2
72.5°	2.5
75°	0.0
77.5°	0.8
80°	0.8
82.5°	1.7
85°	1.7
87.5°	0.8
90°	0.0
92.5°	0.0
95°	0.0
97.5°	0.0
100°	0.0
102.5°	0.0
105°	0.0
107.5°	0.0
110°	0.0



TEST NUMBER: P244737

CATALOG NUMBER: LSR8B30D010 EC8B30827 8LBN0WMH

**CANDELA DISTRIBUTION (continued):**

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)