

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P246465

Luminaire Tested: **LSR8B30D010 EC8B30827 8LBS0B**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P246465  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-17)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LSR8B30D010 EC8B30827 8LBS0B  
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED  
DOWNLIGHT- CYLINDEC  
80 CRI 2700 CCT WITH SPECULAR BLACK TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2645.0 lumens  
Efficiency: N/A  
Efficacy: 97.6 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.25  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 27.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P246465

CATALOG NUMBER: LSR8B30D010 EC8B30827 8LBS0B

### Luminous Intensity Polar Plot

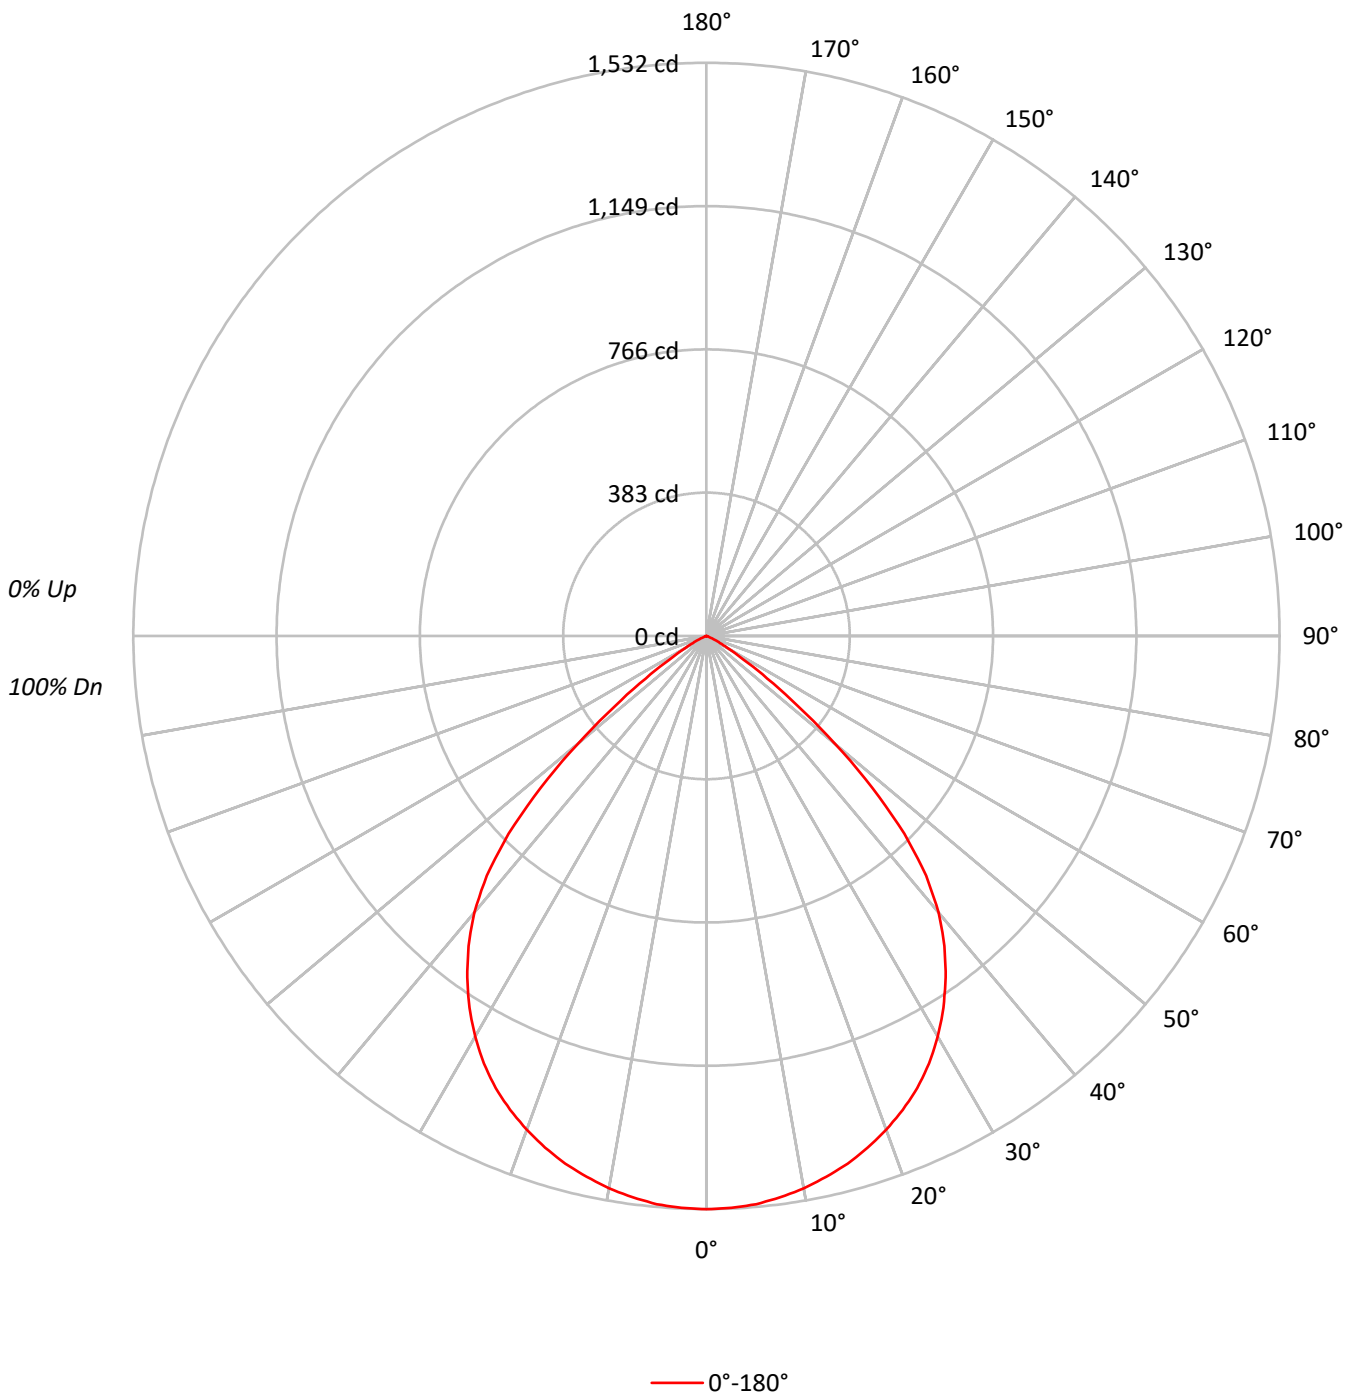



TEST NUMBER: P246465

CATALOG NUMBER: LSR8B30D010 EC8B30827 8LBS0B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	96	94	93	91
2	105	99	94	90	103	98	93	89	94	90	87	91	88	85	88	86	84	82
3	98	90	84	79	96	89	83	79	86	81	77	84	80	76	81	78	75	73
4	92	82	76	70	90	81	75	70	79	73	69	77	72	68	75	71	67	66
5	86	75	68	63	84	74	68	63	72	66	62	71	65	61	69	64	61	59
6	80	69	62	56	78	68	61	56	67	60	56	65	60	55	64	59	55	53
7	75	63	56	51	73	63	56	51	61	55	51	60	54	50	59	54	50	48
8	70	59	51	46	69	58	51	46	57	50	46	56	50	46	54	49	46	44
9	66	54	47	42	65	54	47	42	53	46	42	52	46	42	51	45	42	40
10	62	50	43	39	61	50	43	39	49	43	39	48	42	38	47	42	38	37

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	47247
5°	47196
10°	46949
15°	46609
20°	46092
25°	45364
30°	44035
35°	41962
40°	38865
45°	32611
50°	21559
55°	10645
60°	4225
65°	1642
70°	252
75°	0
80°	0
85°	0



TEST NUMBER: P246465

CATALOG NUMBER: LSR8B30D010 EC8B30827 8LBS0B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	144.7	5.5
10°-20°	411.5	15.6
20°-30°	612.6	23.2
30°-40°	693.8	26.2
40°-50°	560.9	21.2
50°-60°	194.6	7.4
60°-70°	26.6	1.0
70°-80°	0.4	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1168.8	44.2
0°-40°	1862.6	70.4
0°-60°	2618.0	99.0
0°-90°	2645.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2645.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1532	
5°	1525	145
15°	1460	412
25°	1333	613
35°	1115	694
45°	748	561
55°	198	195
65°	22	27
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P246465

CATALOG NUMBER: LSR8B30D010 EC8B30827 8LBS0B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1532.2
2.5°	1530.4
5°	1524.7
7.5°	1513.5
10°	1499.4
12.5°	1480.6
15°	1460.0
17.5°	1433.7
20°	1404.6
22.5°	1370.9
25°	1333.3
27.5°	1288.3
30°	1236.7
32.5°	1178.5
35°	1114.7
37.5°	1044.3
40°	965.5
42.5°	868.9
45°	747.8
47.5°	601.4
50°	449.4
52.5°	307.8
55°	198.0
57.5°	117.3
60°	68.5
62.5°	40.3
65°	22.5
67.5°	10.3
70°	2.8
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)