

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P245757

Luminaire Tested: **LSR8B30D010 EC8B30835 8LBS0GPH**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P245757
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-16)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B30D010 EC8B30835 8LBS0GPH
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
80 CRI 3500 CCT WITH GRAPHITE TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3064.0 lumens
Efficiency: N/A
Efficacy: 113.1 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.25
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 27.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P245757

CATALOG NUMBER: LSR8B30D010 EC8B30835 8LBS0GPH

Luminous Intensity Polar Plot

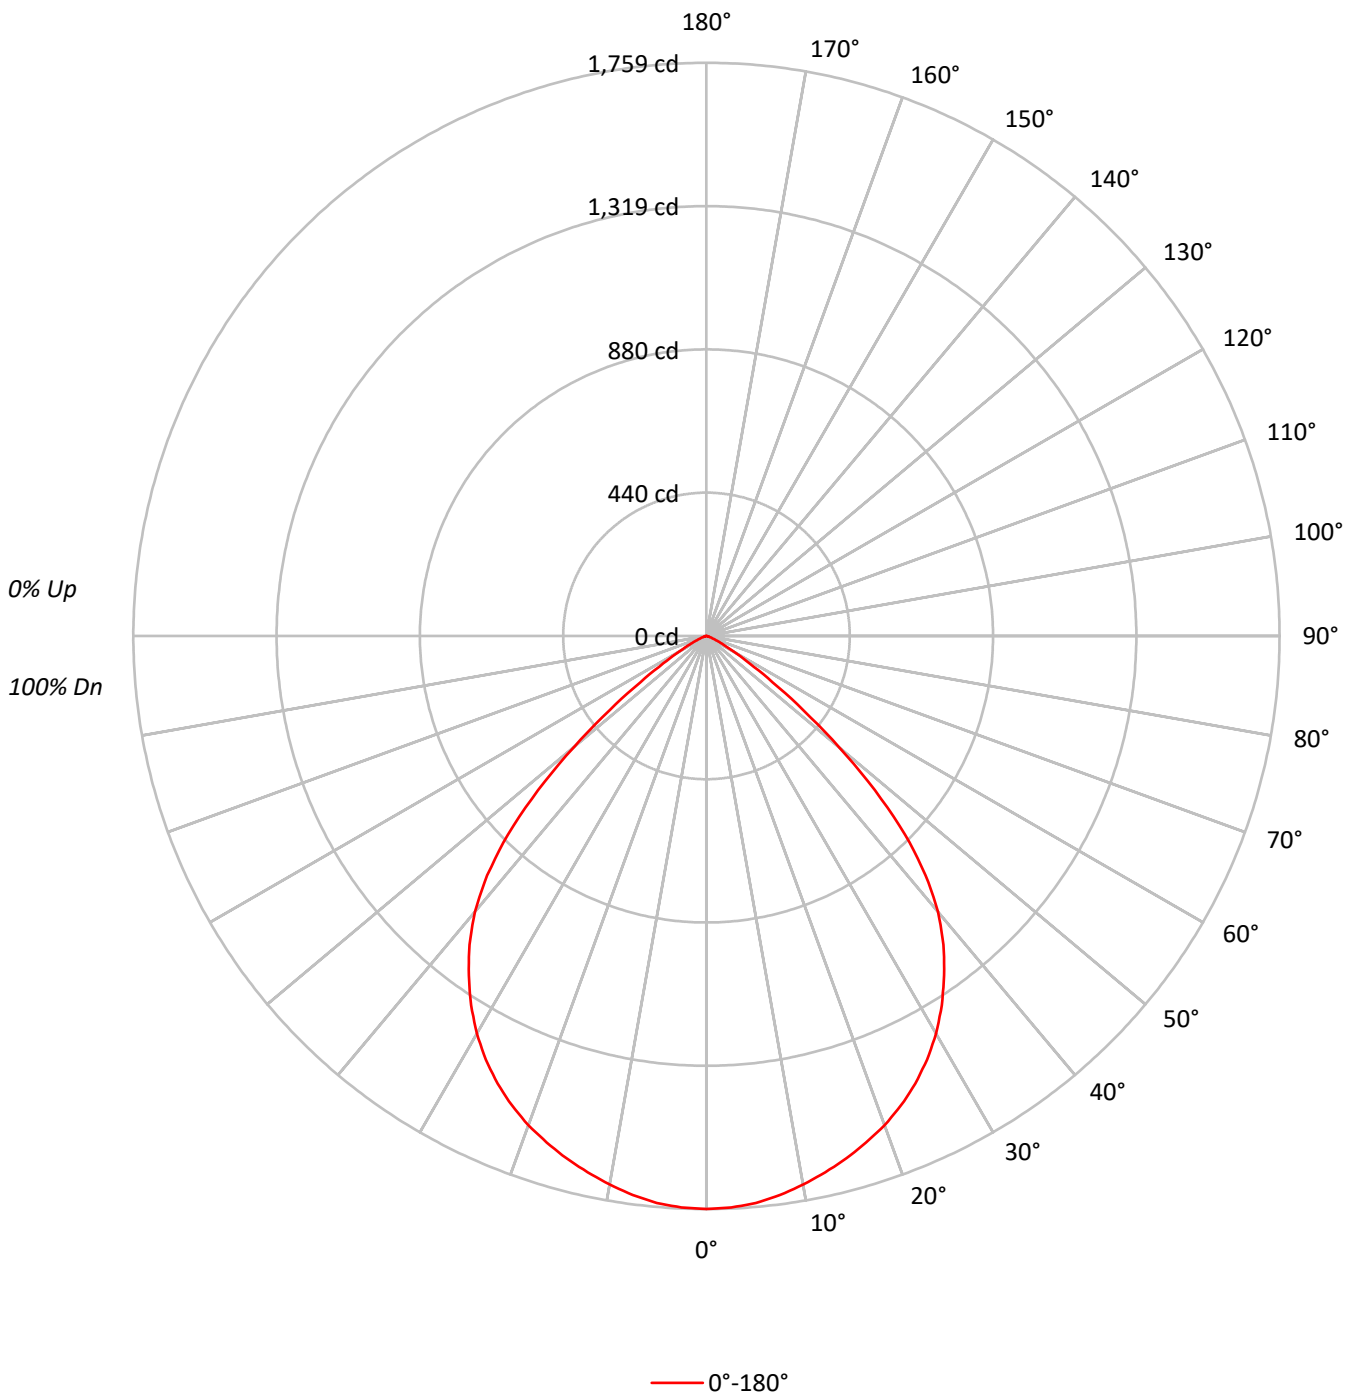



TEST NUMBER: P245757

CATALOG NUMBER: LSR8B30D010 EC8B30835 8LBS0GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	103	110	107	104	102	103	100	98		99	97	95		95	94	93	91
2	105	99	94	90	103	97	93	89	94	90	87		91	88	85		88	85	83	81
3	98	90	84	79	96	88	83	78	86	81	77		83	79	76		81	77	74	73
4	91	82	75	70	89	81	74	69	78	73	69		76	72	68		74	70	67	65
5	85	75	68	62	83	74	67	62	72	66	61		70	65	61		68	64	60	58
6	79	69	61	56	78	68	61	56	66	60	55		64	59	55		63	58	54	53
7	74	63	56	50	73	62	55	50	61	55	50		59	54	50		58	53	49	48
8	70	58	51	46	68	57	50	46	56	50	45		55	49	45		54	49	45	43
9	65	54	47	42	64	53	46	42	52	46	41		51	45	41		50	45	41	40
10	62	50	43	38	60	49	43	38	48	42	38		48	42	38		47	42	38	36

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	54232
5°	54068
10°	53534
15°	52984
20°	52432
25°	51574
30°	50163
35°	47876
40°	44513
45°	37587
50°	25517
55°	13333
60°	5982
65°	2919
70°	1172
75°	715
80°	533
85°	354



TEST NUMBER: P245757

CATALOG NUMBER: LSR8B30D010 EC8B30835 8LBS0GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	165.5	5.4
10°-20°	468.2	15.3
20°-30°	696.9	22.7
30°-40°	792.2	25.9
40°-50°	647.8	21.1
50°-60°	241.5	7.9
60°-70°	44.1	1.4
70°-80°	6.8	0.2
80°-90°	1.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1330.6	43.4
0°-40°	2122.8	69.3
0°-60°	3012.1	98.3
0°-90°	3064.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3064.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1759	
5°	1747	166
15°	1660	468
25°	1516	697
35°	1272	792
45°	862	648
55°	248	241
65°	40	44
75°	6	7
85°	1	1
90°	0	



TEST NUMBER: P245757

CATALOG NUMBER: LSR8B30D010 EC8B30835 8LBS0GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1758.7
2.5°	1755.7
5°	1746.7
7.5°	1730.7
10°	1709.7
12.5°	1685.7
15°	1659.7
17.5°	1629.8
20°	1597.8
22.5°	1559.8
25°	1515.8
27.5°	1465.8
30°	1408.8
32.5°	1343.8
35°	1271.8
37.5°	1194.8
40°	1105.8
42.5°	995.8
45°	861.9
47.5°	700.9
50°	531.9
52.5°	374.9
55°	248.0
57.5°	156.0
60°	97.0
62.5°	62.0
65°	40.0
67.5°	23.0
70°	13.0
72.5°	8.0
75°	6.0
77.5°	4.0
80°	3.0
82.5°	1.0
85°	1.0
87.5°	0.0
90°	0.0

(END OF REPORT)