

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P246309

Luminaire Tested: **LSR8B30D010 EC8B309727 8LBW0B**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P246309
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-47)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B30D010 EC8B309727 8LBW0B
Description: PORTFOLIO 8 INCH WIDE DISTRIBUTION 60 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
97 CRI 2700 CCT WITH SPECULAR BLACK TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1371.0 lumens
Efficiency: N/A
Efficacy: 50.6 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.08 / 1.02
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 27.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P246309

CATALOG NUMBER: LSR8B30D010 EC8B309727 8LBW0B

Luminous Intensity Polar Plot

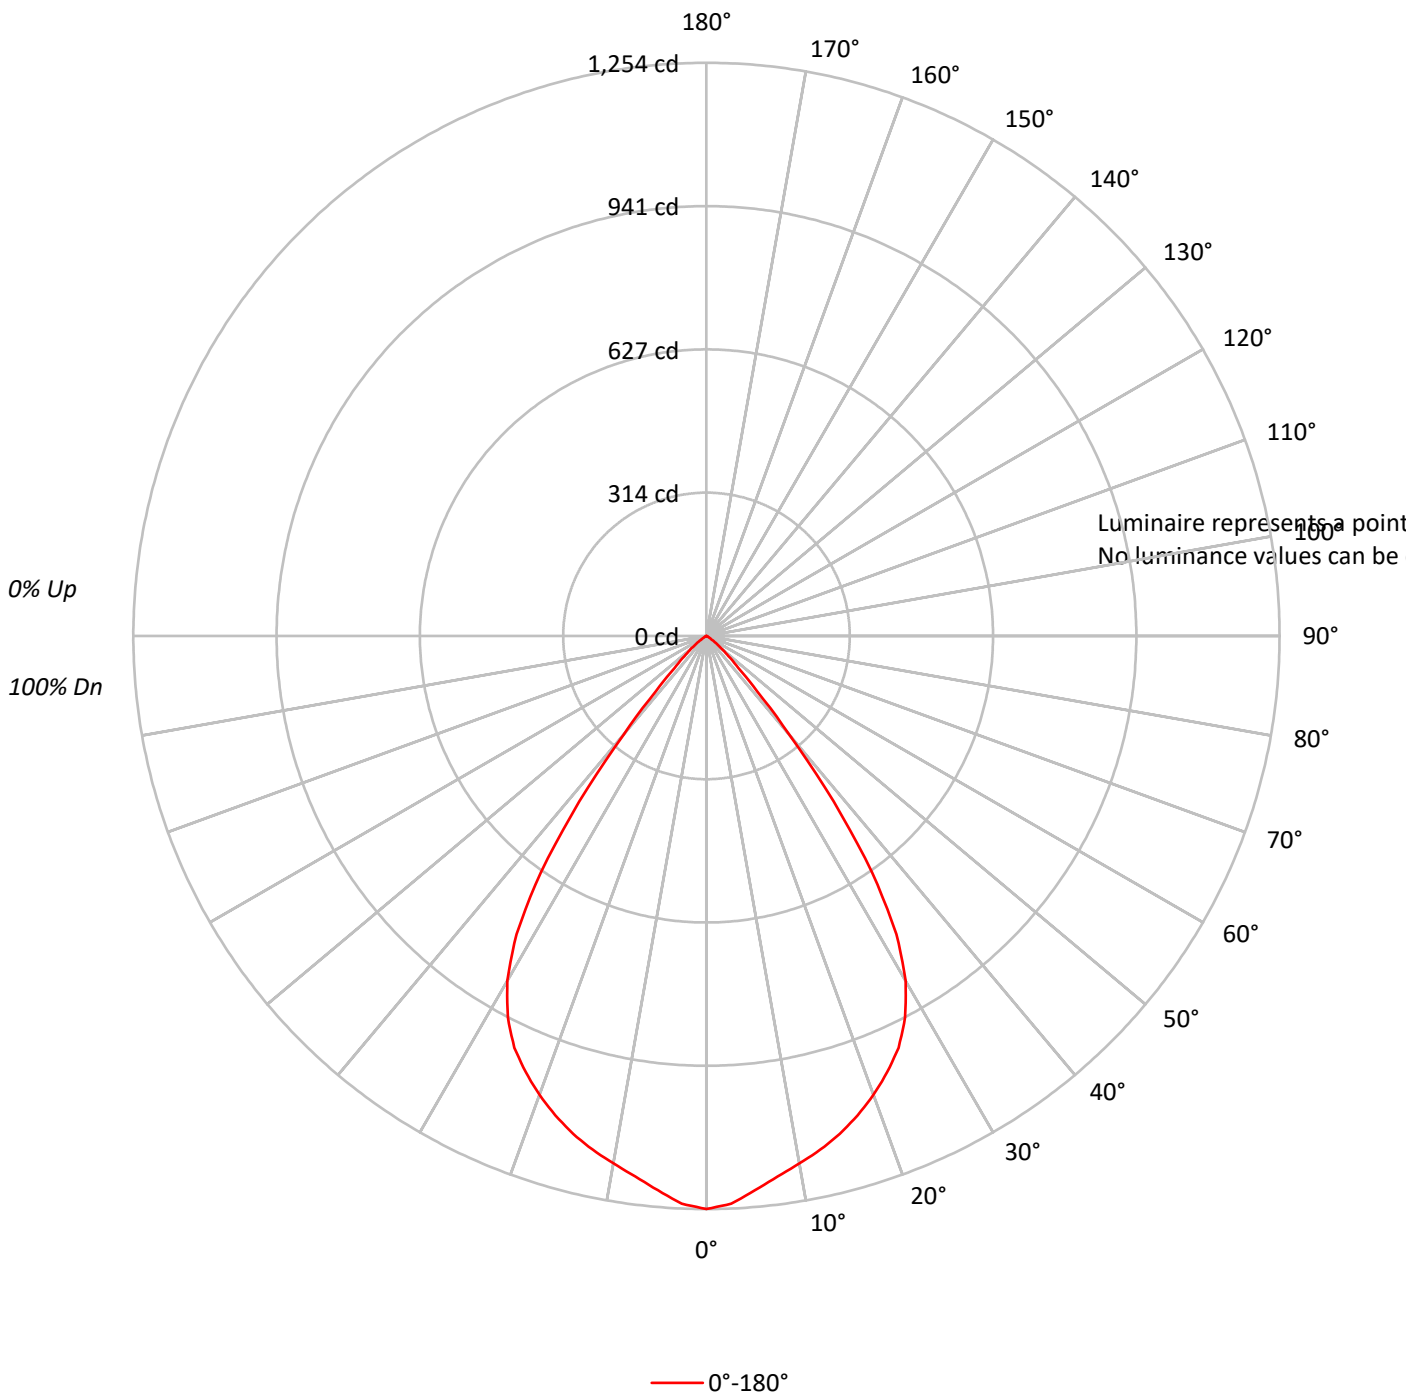



TEST NUMBER: P246309

CATALOG NUMBER: LSR8B30D010 EC8B309727 8LBW0B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10				
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	106	111	108	106	104	104	102	101	101	99	98	97	96	95	93	93	93	93
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86	86	86	86
3	102	95	90	86	100	94	89	85	91	87	84	89	85	82	86	84	81	80	80	80	80
4	96	88	83	78	94	87	82	78	85	80	77	83	79	76	81	78	75	74	74	74	74
5	91	82	76	72	89	81	76	71	80	75	71	78	74	70	76	73	70	68	68	68	68
6	86	77	71	66	85	76	70	66	74	69	65	73	68	65	72	68	65	63	63	63	63
7	82	72	66	61	80	71	65	61	70	64	61	69	64	60	67	63	60	58	58	58	58
8	77	67	61	57	76	67	61	57	66	60	56	65	60	56	64	59	56	54	54	54	54
9	73	63	57	53	72	63	57	53	62	56	52	61	56	52	60	55	52	51	51	51	51
10	70	59	53	49	68	59	53	49	58	53	49	57	52	49	57	52	49	47	47	47	47

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P246309

CATALOG NUMBER: LSR8B30D010 EC8B309727 8LBW0B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	114.8	8.4
10°-20°	317.3	23.1
20°-30°	453.1	33.1
30°-40°	375.5	27.4
40°-50°	92.6	6.8
50°-60°	16.7	1.2
60°-70°	0.9	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	885.3	64.6
0°-40°	1260.8	92.0
0°-60°	1370.1	99.9
0°-90°	1371.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1371.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1254	
5°	1218	115
15°	1128	317
25°	994	453
35°	632	376
45°	99	93
55°	16	17
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P246309

CATALOG NUMBER: LSR8B30D010 EC8B309727 8LBW0B

CANDELA DISTRIBUTION (FULL):

	0°
0°	1253.7
2.5°	1243.3
5°	1217.5
7.5°	1192.5
10°	1171.6
12.5°	1151.4
15°	1127.7
17.5°	1099.9
20°	1068.5
22.5°	1033.0
25°	994.1
27.5°	941.2
30°	871.5
32.5°	773.4
35°	632.1
37.5°	456.7
40°	281.2
42.5°	163.6
45°	98.8
47.5°	65.4
50°	43.9
52.5°	28.5
55°	16.0
57.5°	7.7
60°	3.5
62.5°	1.4
65°	0.7
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)