

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P246544

Luminaire Tested: **LSR8B40D010 EC8B40830 8LBW0MW**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P246544  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-48)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LSR8B40D010 EC8B40830 8LBW0MW  
Description: PORTFOLIO 8 INCH WIDE DISTRIBUTION 60 DEGREE CUTOFF RECESSED  
DOWNLIGHT- CYLINDEC  
80 CRI 3000 CCT WITH MATTE WHITE TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4313.0 lumens  
Efficiency: N/A  
Efficacy: 105.5 lumens/watt  
Spacing Criteria (0/90/45): 1.11 / 1.11 / 1.05  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 40.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P246544

CATALOG NUMBER: LSR8B40D010 EC8B40830 8LBW0MW

### Luminous Intensity Polar Plot

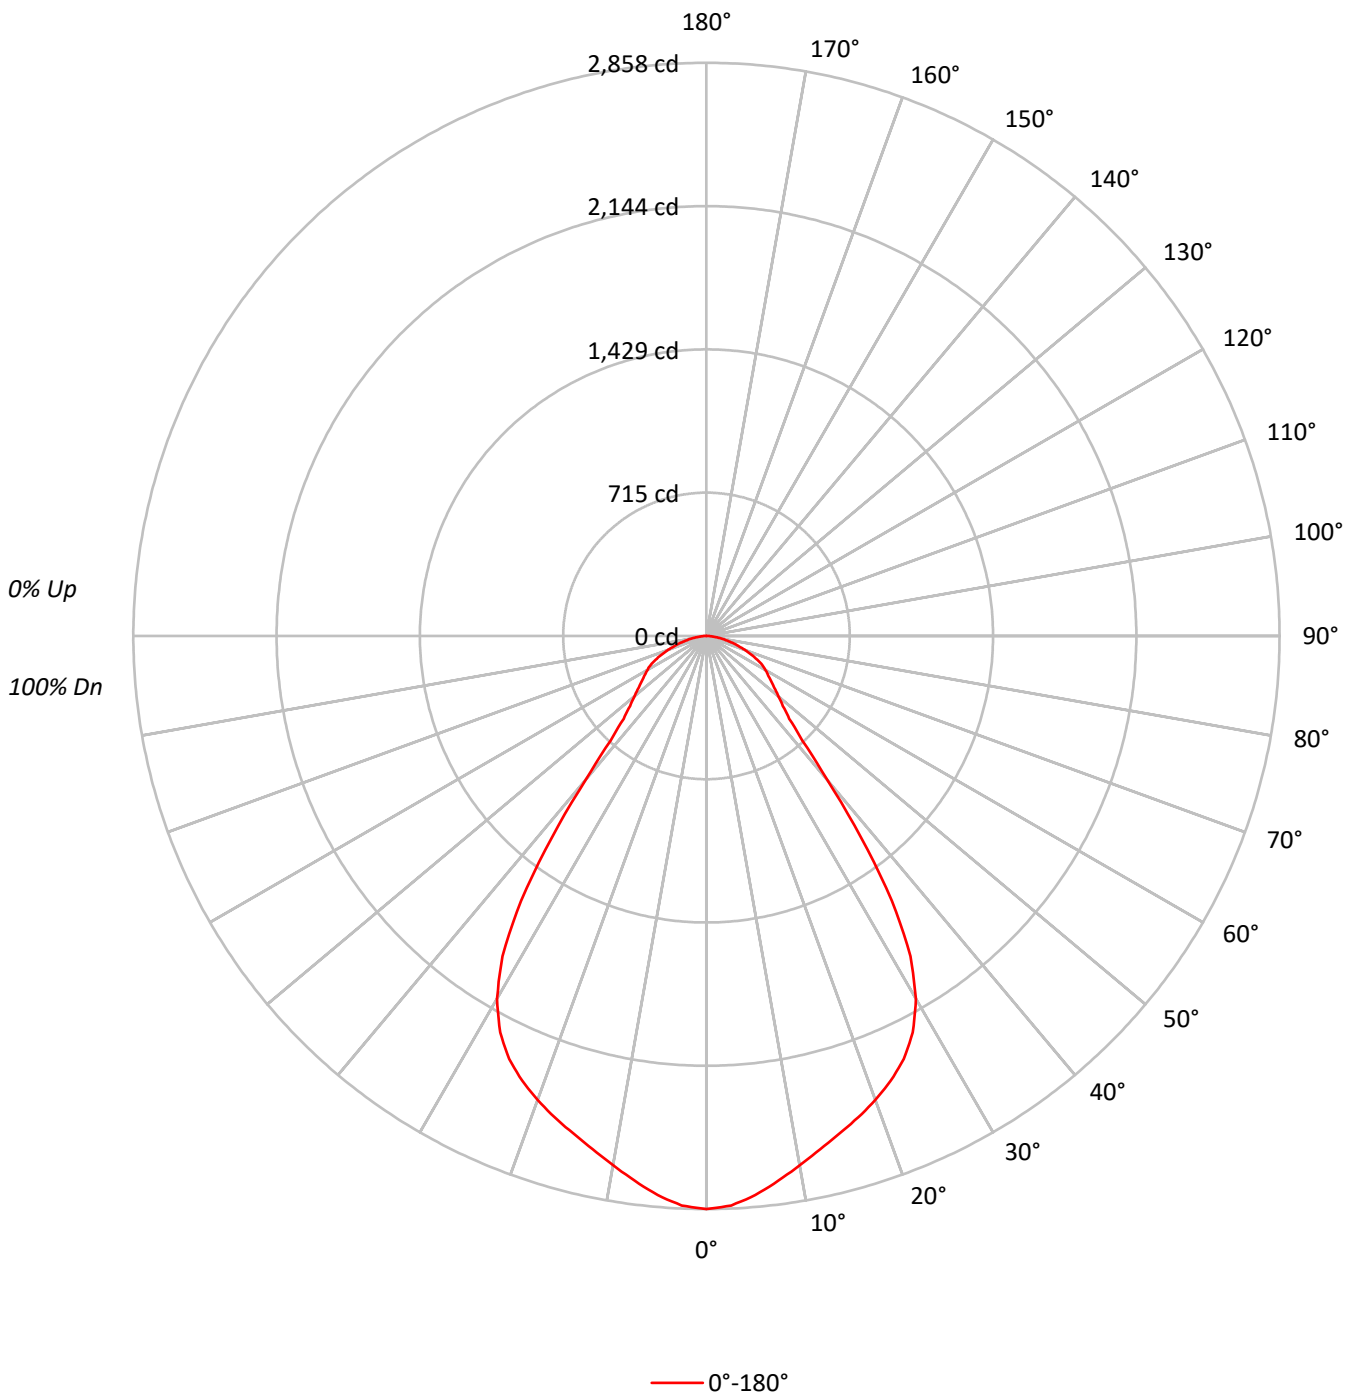



TEST NUMBER: P246544

CATALOG NUMBER: LSR8B40D010 EC8B40830 8LBW0MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	111	107	104	101	109	105	102	99	101	99	96	97	95	93	94	92	91	89
2	103	97	91	87	101	95	90	86	92	87	84	88	85	82	86	83	80	78
3	96	88	81	76	94	86	80	75	83	78	74	81	76	73	78	75	72	70
4	90	80	73	67	88	79	72	67	76	70	66	74	69	65	72	68	64	62
5	84	73	66	60	82	72	65	60	70	64	59	68	63	59	67	62	58	56
6	79	67	60	54	77	66	59	54	65	58	54	63	58	53	62	57	53	51
7	74	62	55	49	72	61	54	49	60	54	49	59	53	49	57	52	48	47
8	69	58	50	45	68	57	50	45	56	50	45	55	49	45	54	48	45	43
9	65	54	47	42	64	53	46	42	52	46	41	51	45	41	50	45	41	40
10	62	50	43	39	61	50	43	39	49	43	38	48	42	38	47	42	38	37

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	88121
5°	86634
10°	83910
15°	81972
20°	80801
25°	79218
30°	74379
35°	60713
40°	37609
45°	25472
50°	22442
55°	21182
60°	21006
65°	20365
70°	18257
75°	15810
80°	13354
85°	10650



TEST NUMBER: P246544

CATALOG NUMBER: LSR8B40D010 EC8B40830 8LBW0MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	263.3	6.1
10°-20°	725.2	16.8
20°-30°	1063.5	24.7
30°-40°	972.1	22.5
40°-50°	481.3	11.2
50°-60°	355.9	8.3
60°-70°	273.6	6.3
70°-80°	142.6	3.3
80°-90°	35.5	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2052.0	47.6
0°-40°	3024.1	70.1
0°-60°	3861.3	89.5
0°-90°	4313.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4313.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2858	
5°	2799	263
15°	2568	725
25°	2328	1064
35°	1613	972
45°	584	481
55°	394	356
65°	279	274
75°	133	143
85°	30	36
90°	0	



TEST NUMBER: P246544

CATALOG NUMBER: LSR8B40D010 EC8B40830 8LBW0MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2857.7
2.5°	2842.6
5°	2798.8
7.5°	2740.0
10°	2679.8
12.5°	2621.0
15°	2567.7
17.5°	2517.0
20°	2462.3
22.5°	2400.8
25°	2328.3
27.5°	2228.4
30°	2088.9
32.5°	1893.3
35°	1612.8
37.5°	1265.4
40°	934.3
42.5°	707.2
45°	584.1
47.5°	517.1
50°	467.8
52.5°	428.2
55°	394.0
57.5°	365.2
60°	340.6
62.5°	314.6
65°	279.1
67.5°	240.8
70°	202.5
72.5°	166.9
75°	132.7
77.5°	102.6
80°	75.2
82.5°	52.0
85°	30.1
87.5°	10.9
90°	0.0

(END OF REPORT)