

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P245596

Luminaire Tested: **LSR8B40D010 EC8B40930 8LBW0GPH**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P245596
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-46)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B40D010 EC8B40930 8LBW0GPH
Description: PORTFOLIO 8 INCH WIDE DISTRIBUTION 60 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
97 CRI 3000 CCT WITH GRAPHITE TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3254.2 lumens
Efficiency: N/A
Efficacy: 79.6 lumens/watt
Spacing Criteria (0/90/45): 1.11 / 1.11 / 1.05
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 40.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P245596

CATALOG NUMBER: LSR8B40D010 EC8B40930 8LBW0GPH

Luminous Intensity Polar Plot

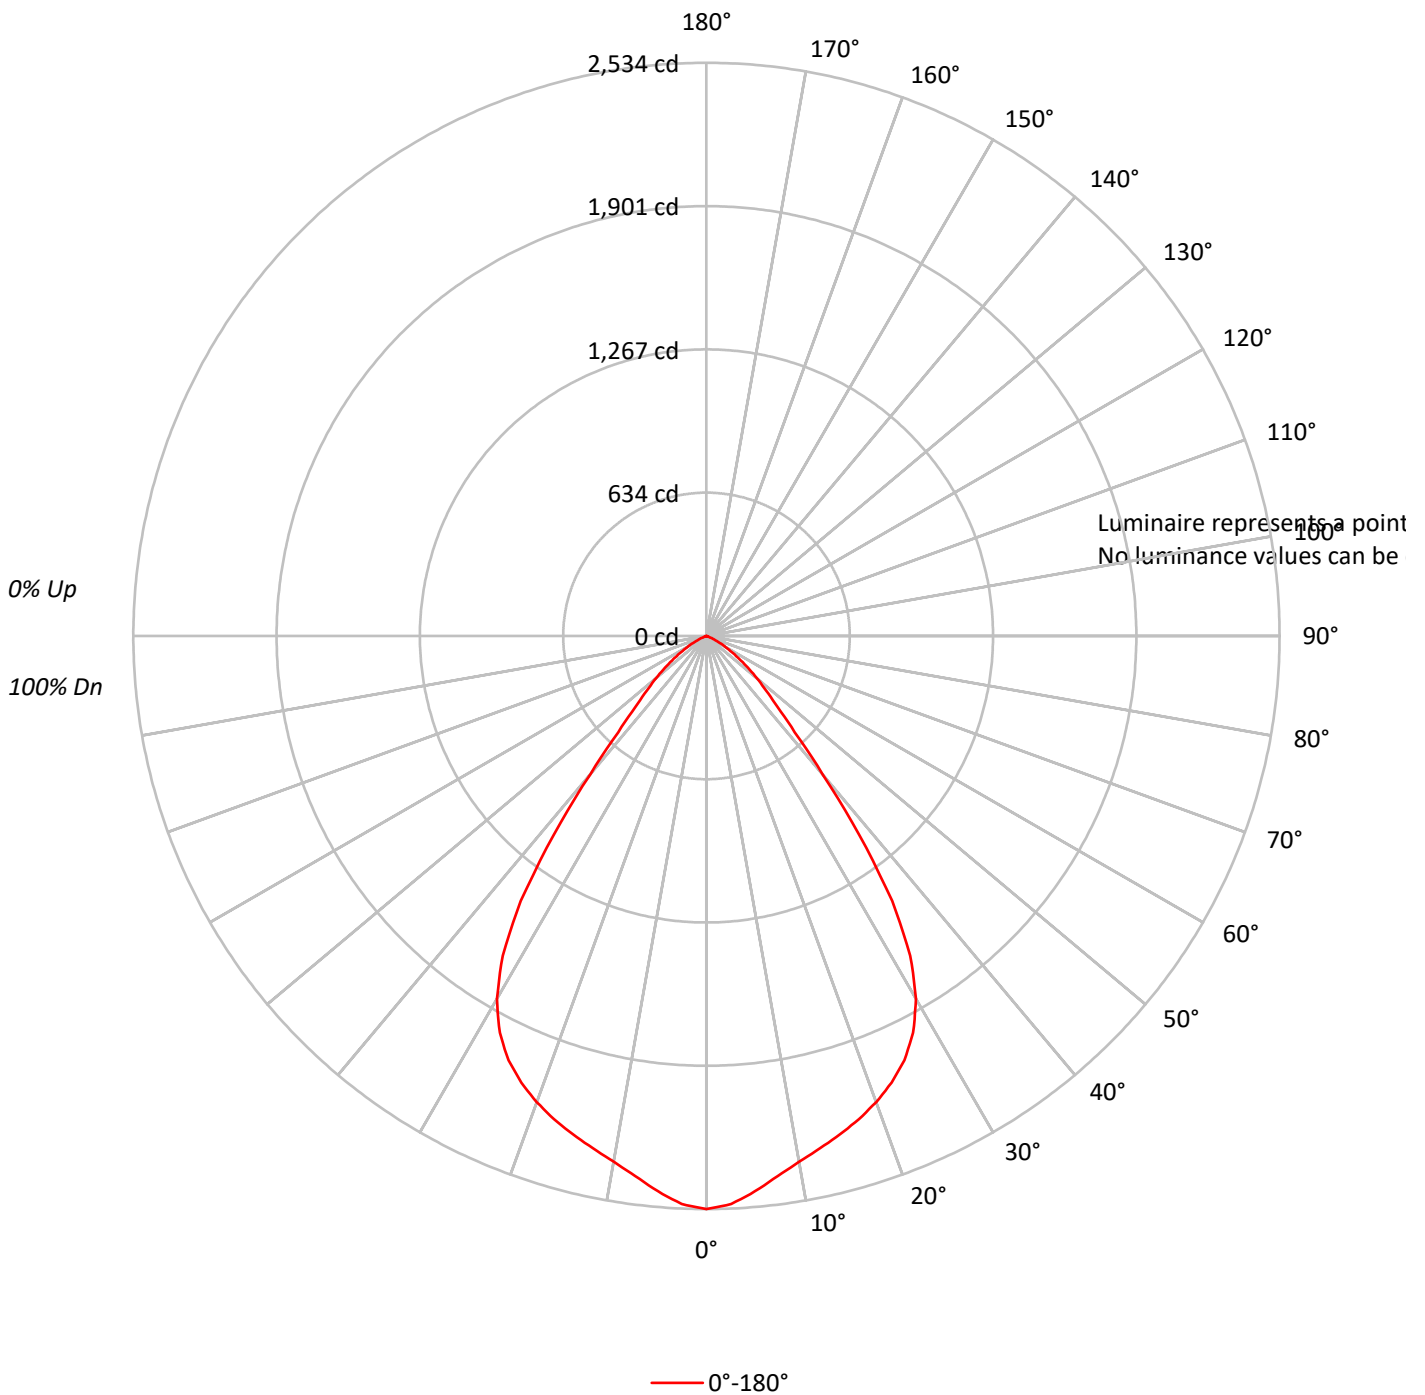



TEST NUMBER: P245596

CATALOG NUMBER: LSR8B40D010 EC8B40930 8LBW0GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	107	104	110	108	105	103	103	101	100	100	98	97	96	95	94	92
2	106	101	96	92	104	99	95	91	96	92	89	93	90	87	90	88	86	84
3	100	93	87	83	98	91	86	82	89	84	81	86	82	79	84	81	78	76
4	94	85	79	74	92	84	78	74	82	77	73	80	76	72	78	74	71	70
5	88	79	72	67	87	78	72	67	76	71	66	74	70	66	73	69	65	64
6	83	73	66	61	82	72	66	61	71	65	61	69	64	60	68	63	60	58
7	78	68	61	56	77	67	61	56	66	60	56	65	59	56	63	59	55	54
8	74	63	56	52	73	63	56	52	61	56	51	60	55	51	59	55	51	49
9	70	59	52	48	69	58	52	48	57	52	48	57	51	47	56	51	47	46
10	66	55	49	44	65	55	49	44	54	48	44	53	48	44	52	47	44	43

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P245596

CATALOG NUMBER: LSR8B40D010 EC8B40930 8LBW0GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	231.9	7.1
10°-20°	643.8	19.8
20°-30°	945.4	29.1
30°-40°	857.1	26.3
40°-50°	366.9	11.3
50°-60°	162.3	5.0
60°-70°	43.3	1.3
70°-80°	3.4	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1821.1	56.0
0°-40°	2678.2	82.3
0°-60°	3207.4	98.6
0°-90°	3254.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3254.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2534	
5°	2465	232
15°	2281	644
25°	2070	945
35°	1431	857
45°	443	367
55°	176	162
65°	40	43
75°	2	3
85°	0	0
90°	0	



TEST NUMBER: P245596

CATALOG NUMBER: LSR8B40D010 EC8B40930 8LBW0GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	2533.9
2.5°	2514.0
5°	2464.6
7.5°	2408.2
10°	2360.0
12.5°	2320.1
15°	2281.3
17.5°	2240.2
20°	2193.2
22.5°	2138.1
25°	2069.9
27.5°	1978.2
30°	1852.6
32.5°	1676.3
35°	1430.8
37.5°	1109.0
40°	798.8
42.5°	576.8
45°	442.9
47.5°	357.2
50°	290.1
52.5°	230.3
55°	176.2
57.5°	131.6
60°	96.3
62.5°	66.9
65°	39.9
67.5°	17.6
70°	8.2
72.5°	4.7
75°	2.4
77.5°	1.1
80°	1.1
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)