

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P244078

Luminaire Tested: **LSR8B40D010 EC8B409727 8LBS0LI**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P244078
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-12)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B40D010 EC8B409727 8LBSOLI
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
97 CRI 2700 CCT WITH SPECULAR CLEAR TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3454.0 lumens
Efficiency: N/A
Efficacy: 84.5 lumens/watt
Spacing Criteria (0/90/45): 1.28 / 1.28 / 1.24
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 40.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P244078

CATALOG NUMBER: LSR8B40D010 EC8B409727 8LBSOLI

Luminous Intensity Polar Plot

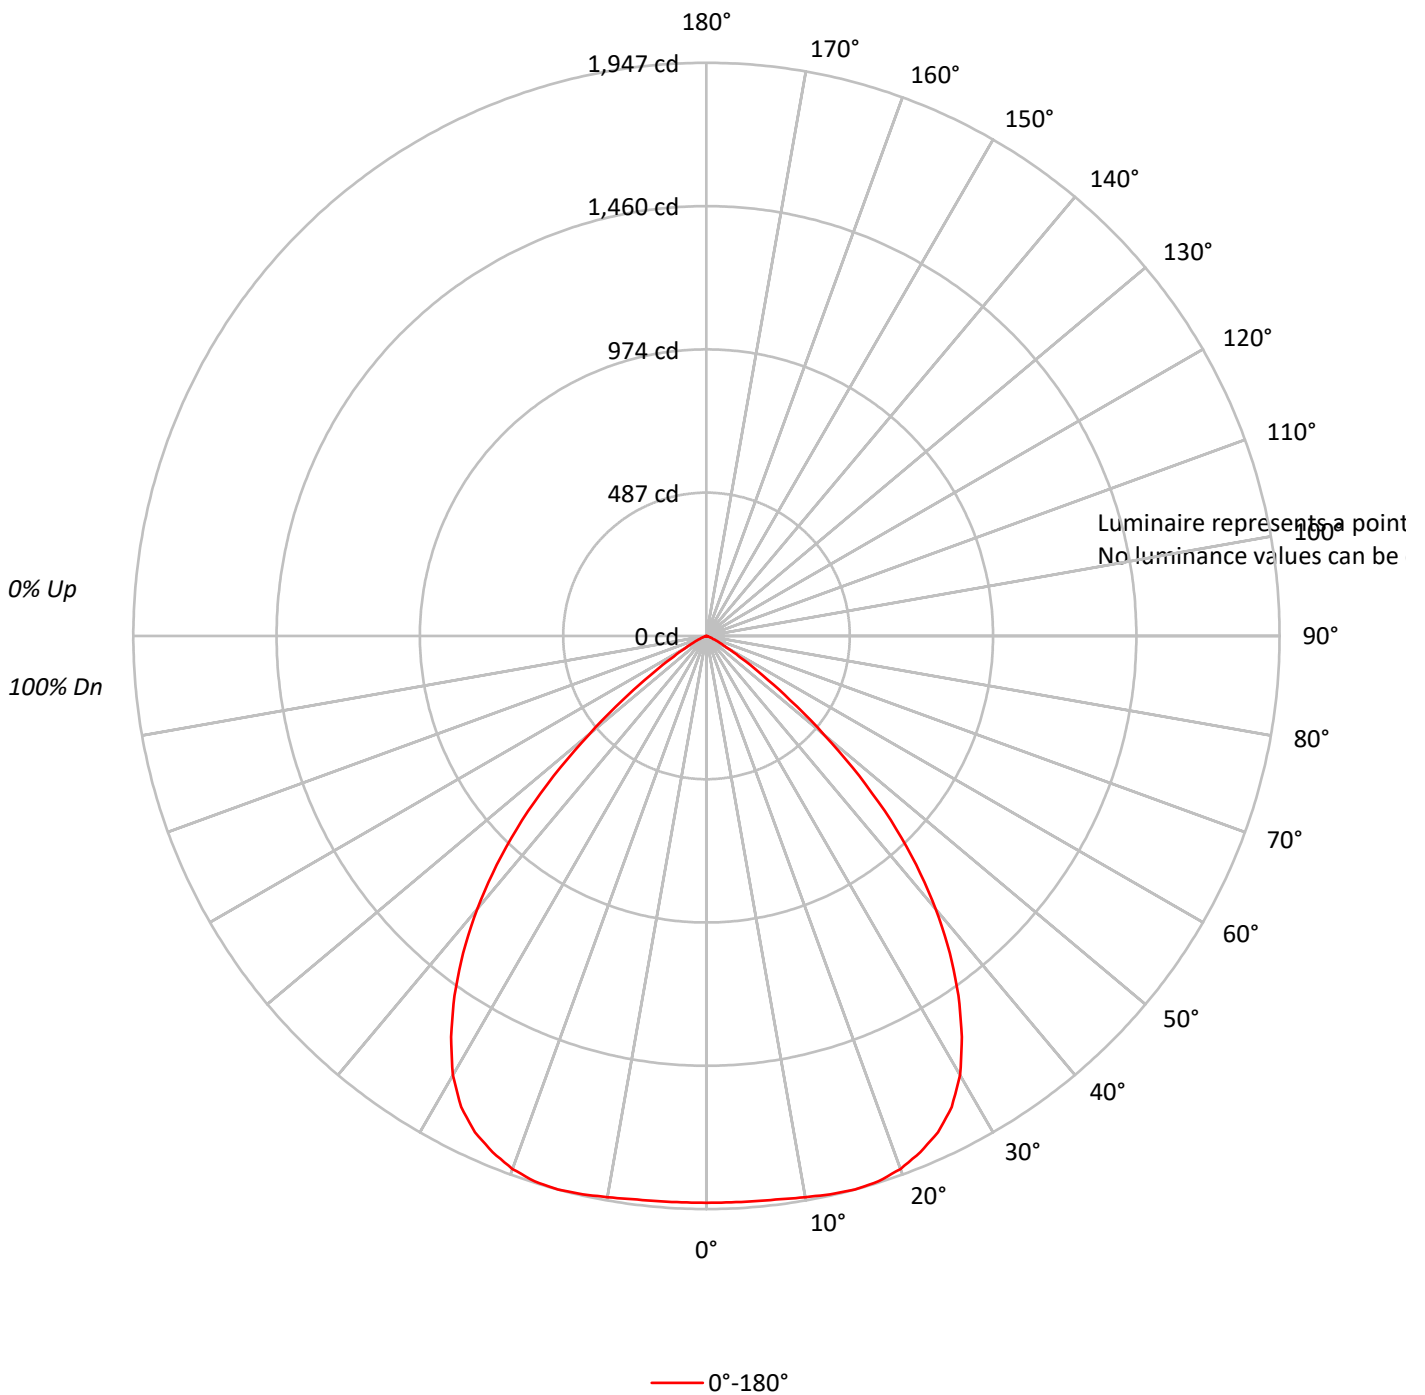



TEST NUMBER: P244078

CATALOG NUMBER: LSR8B40D010 EC8B409727 8LBSOLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	104	110	107	104	102	103	101	99	99	97	96	96	94	93	91
2	105	99	95	91	103	98	93	90	94	91	88	91	88	86	88	86	84	82
3	98	91	85	80	96	89	84	79	86	82	78	84	80	77	82	78	75	74
4	92	83	76	71	90	82	75	71	79	74	70	77	73	69	75	71	68	66
5	86	76	69	63	84	75	68	63	73	67	63	71	66	62	69	65	61	60
6	80	70	62	57	79	69	62	57	67	61	56	66	60	56	64	59	56	54
7	75	64	57	52	74	63	56	52	62	56	51	61	55	51	59	54	51	49
8	71	59	52	47	69	58	52	47	57	51	47	56	51	46	55	50	46	45
9	66	55	48	43	65	54	48	43	53	47	43	52	47	43	51	46	42	41
10	62	51	44	39	61	50	44	39	50	43	39	49	43	39	48	43	39	37

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P244078

CATALOG NUMBER: LSR8B40D010 EC8B409727 8LBSOLI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	184.2	5.3
10°-20°	550.1	15.9
20°-30°	852.1	24.7
30°-40°	925.4	26.8
40°-50°	672.5	19.5
50°-60°	228.6	6.6
60°-70°	36.4	1.1
70°-80°	3.9	0.1
80°-90°	0.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1586.4	45.9
0°-40°	2511.8	72.7
0°-60°	3412.9	98.8
0°-90°	3454.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3454.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1926	
5°	1927	184
15°	1947	550
25°	1860	852
35°	1492	925
45°	886	672
55°	233	229
65°	32	36
75°	3	4
85°	1	1
90°	0	



TEST NUMBER: P244078

CATALOG NUMBER: LSR8B40D010 EC8B409727 8LBSOLI

CANDELA DISTRIBUTION (FULL):

	0°
0°	1925.8
2.5°	1925.8
5°	1926.8
7.5°	1929.8
10°	1935.7
12.5°	1942.6
15°	1946.6
17.5°	1942.6
20°	1926.8
22.5°	1898.1
25°	1860.4
27.5°	1803.9
30°	1722.7
32.5°	1614.7
35°	1491.9
37.5°	1358.2
40°	1212.5
42.5°	1055.0
45°	885.6
47.5°	703.4
50°	522.1
52.5°	357.6
55°	232.8
57.5°	141.7
60°	85.2
62.5°	52.5
65°	31.7
67.5°	17.8
70°	7.9
72.5°	5.0
75°	3.0
77.5°	2.0
80°	2.0
82.5°	1.0
85°	1.0
87.5°	0.0
90°	0.0

(END OF REPORT)