

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P244516

Luminaire Tested: **LSR8B40D010 EC8B409730 8LBS0H**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P244516
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-13)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B40D010 EC8B409730 8LBS0H
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
97 CRI 3000 CCT WITH SEMI-SPECULAR CLEAR TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3553.0 lumens
Efficiency: N/A
Efficacy: 86.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.23
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 40.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P244516

CATALOG NUMBER: LSR8B40D010 EC8B409730 8LBS0H

Luminous Intensity Polar Plot

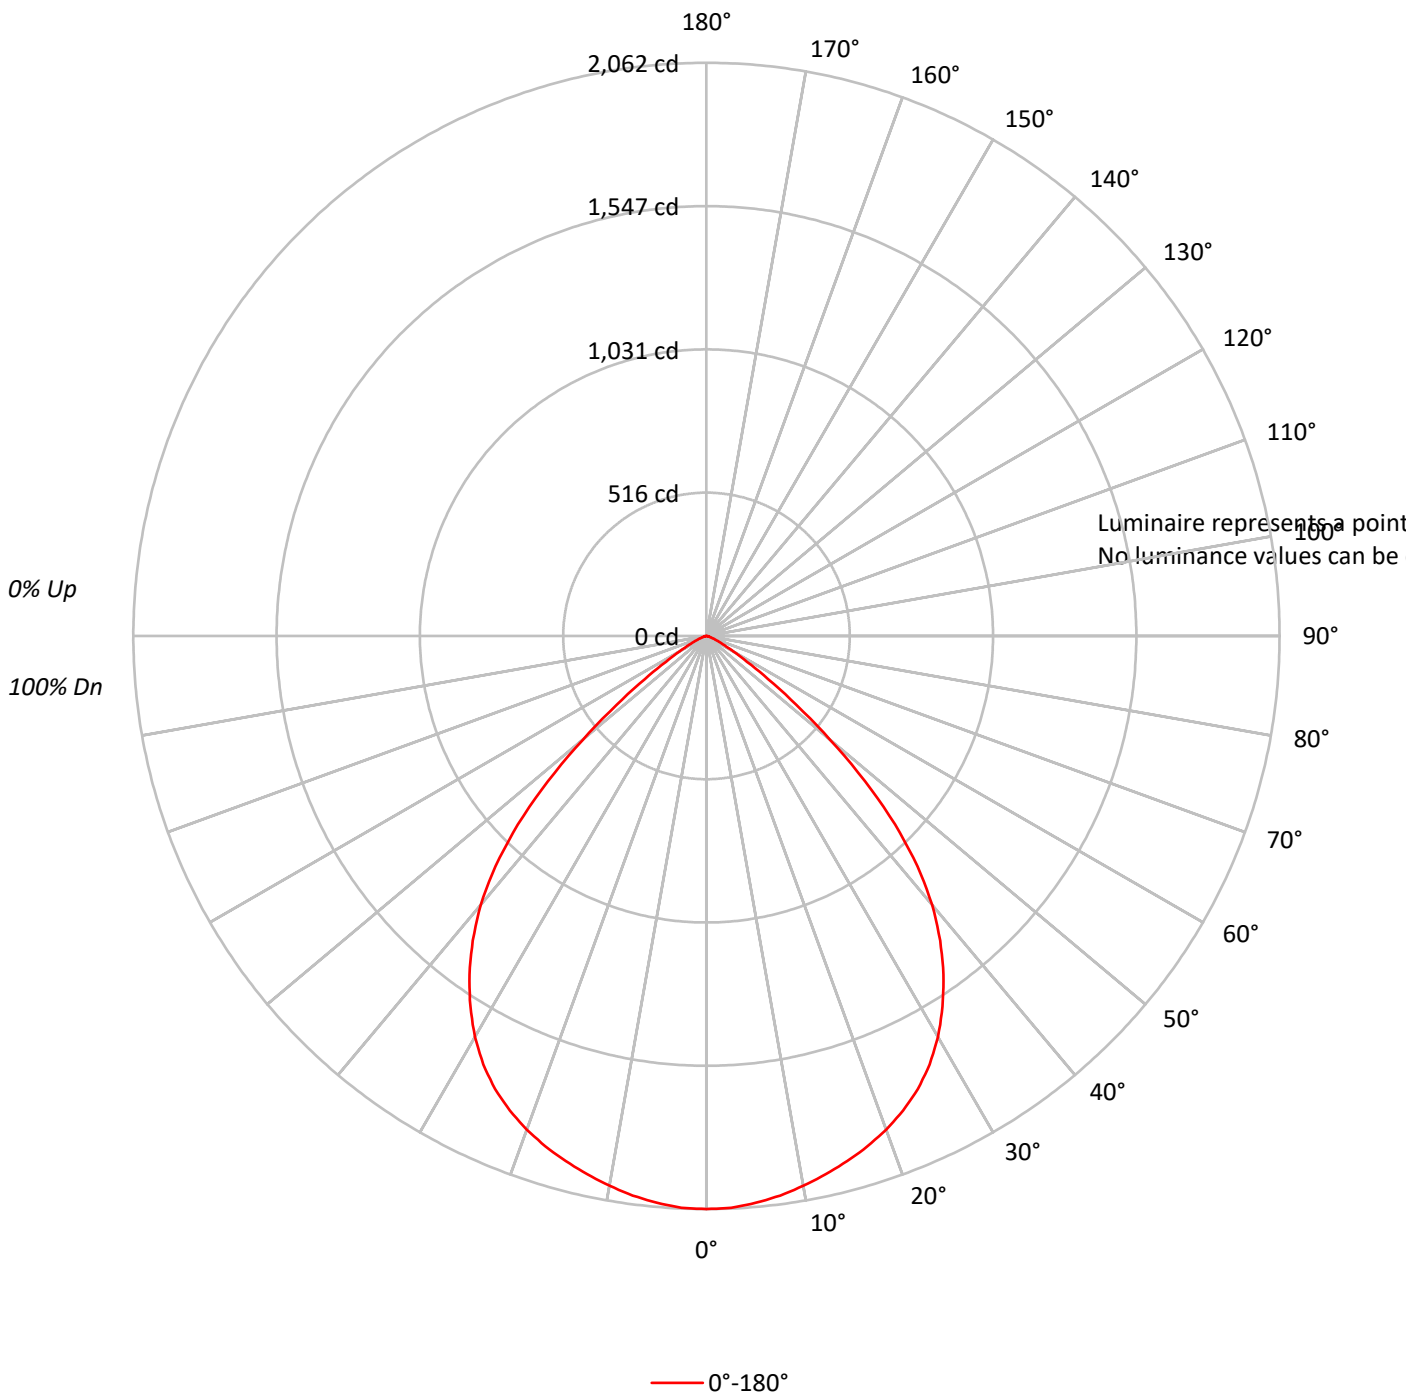



TEST NUMBER: P244516

CATALOG NUMBER: LSR8B40D010 EC8B409730 8LBS0H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	103	110	107	104	102	103	100	98		99	97	95		95	94	93	91
2	105	99	94	90	103	97	93	89	94	90	87		91	88	85		88	85	83	81
3	98	90	84	79	96	89	83	78	86	81	77		83	79	76		81	78	75	73
4	91	82	75	70	89	81	75	70	79	73	69		76	72	68		74	70	67	65
5	85	75	68	63	83	74	67	62	72	66	62		70	65	61		69	64	60	59
6	80	69	61	56	78	68	61	56	66	60	56		65	59	55		63	58	55	53
7	75	63	56	51	73	63	56	51	61	55	50		60	54	50		59	54	50	48
8	70	58	51	46	68	58	51	46	57	50	46		55	50	46		54	49	45	44
9	66	54	47	42	64	53	47	42	52	46	42		51	46	42		51	45	42	40
10	62	50	43	39	61	50	43	39	49	43	38		48	42	38		47	42	38	37

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P244516

CATALOG NUMBER: LSR8B40D010 EC8B409730 8LBS0H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	194.2	5.5
10°-20°	552.1	15.5
20°-30°	825.9	23.2
30°-40°	923.8	26.0
40°-50°	724.7	20.4
50°-60°	264.5	7.4
60°-70°	53.9	1.5
70°-80°	11.6	0.3
80°-90°	2.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1572.2	44.2
0°-40°	2496.0	70.2
0°-60°	3485.1	98.1
0°-90°	3553.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3553.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2062	
5°	2047	194
15°	1956	552
25°	1799	826
35°	1487	924
45°	960	725
55°	270	264
65°	49	54
75°	10	12
85°	2	2
90°	0	



TEST NUMBER: P244516

CATALOG NUMBER: LSR8B40D010 EC8B409730 8LBS0H

CANDELA DISTRIBUTION (FULL):

0°	
0°	2061.9
2.5°	2058.8
5°	2047.2
7.5°	2030.5
10°	2008.5
12.5°	1983.3
15°	1956.1
17.5°	1925.7
20°	1890.1
22.5°	1848.2
25°	1798.9
27.5°	1738.2
30°	1665.9
32.5°	1581.0
35°	1486.7
37.5°	1380.9
40°	1263.5
42.5°	1124.2
45°	959.7
47.5°	774.3
50°	581.5
52.5°	407.6
55°	270.3
57.5°	172.9
60°	111.1
62.5°	73.3
65°	49.2
67.5°	31.4
70°	19.9
72.5°	13.6
75°	10.5
77.5°	7.3
80°	5.2
82.5°	3.1
85°	2.1
87.5°	1.0
90°	0.0

(END OF REPORT)